环保物料

TEL:0769-82001899

NOTES:
Voltage Rating:250V AC/DC
Current Rating:3.0A AC/DC
Dielectric Withstand Voltage:500V AC/minute
Contact Voltage:20MΩ Max.
Insulation Voltage:1000MΩ Min
Operation temperature:-40°C to +105°C
Insulator Material:Polyester.UL94V-0
Contact Material:Brass
Contact Plating:AuorSn Plated on Nickel Overall

Recommended P.C.B Layout
P.C.B Board Tolerance±0.05

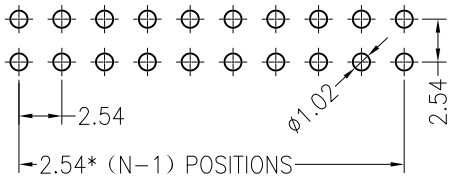

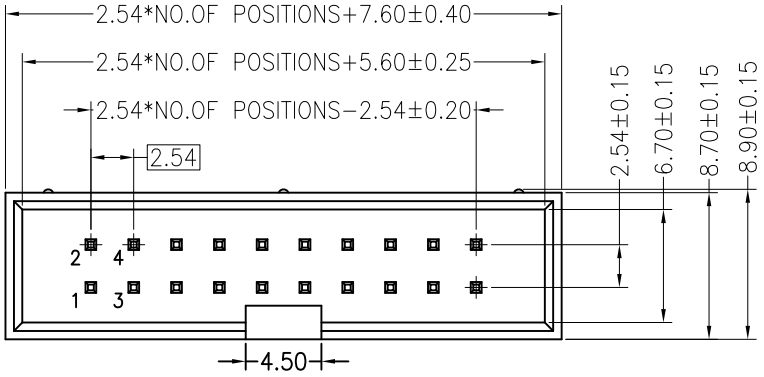

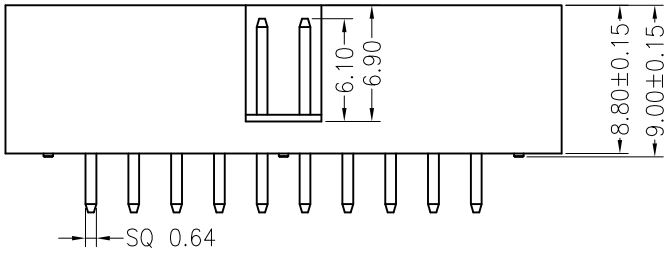



Dimension antitheses list		
item	PC	L
Standard	3.30	11.50
Alternate	---	---

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X° .	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	2.54mm Box Header Connectors
PART. NO.	BH254V-XX-XXB88XX

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009