环保物料

TEL:0769-82001899

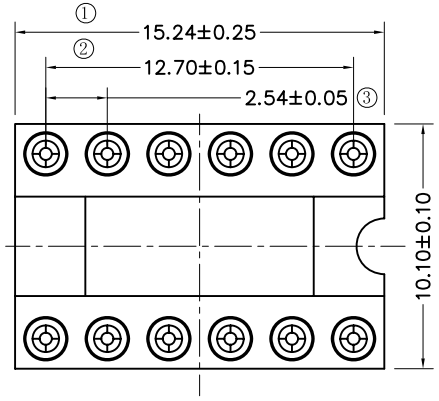

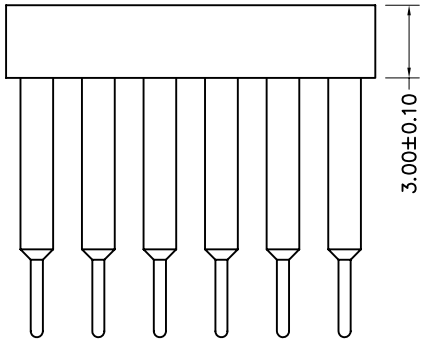

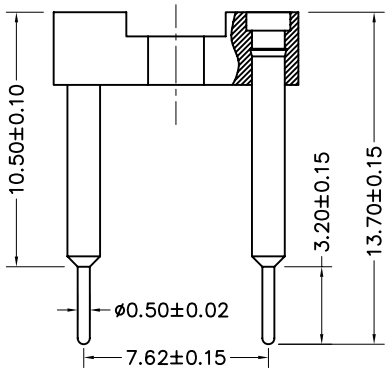

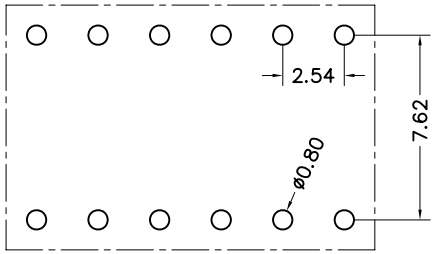

P.C.B LAYOUT

Technical Data
Materlal:
Pin(outer sleeve):Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin Plated:2μm/80μ″NI,5μm/200μ″Sn
Gold Plated:2μm″/80μ″Ni,0.8μ″ gold
Plating(Contact):2μm/80μ″NI,gold or Tin plated
Insuiator:PBT UL94V-0
Cllp(Contact 4 Flnger):Beryllium copper,heat teated

Electrical:
Current rating:3Amps/contact max.
Contact resistance:≤4mΩ/contact
Insuiation resistance:≥1000MΩ at V=100V
Operaing voitage:60VAC/DC

Mechanical:
Average Insertion force with steel pin of ⌀0.432:＜250g
Average withdrawal force with steel pin of ⌀0.432:＞70g
Mechanical lige cycle:min 200
Operaling temperature:-40° C to+105° C

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	2.54mm IC Socket Connectors
PART. NO.	IC254V-12-12-T2G11370B

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009