环保物料

TEL:0769-82001899

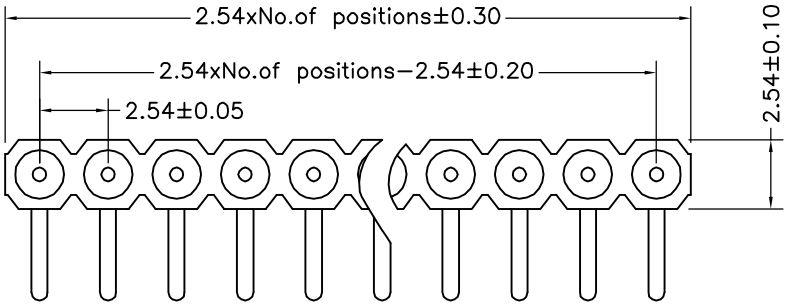

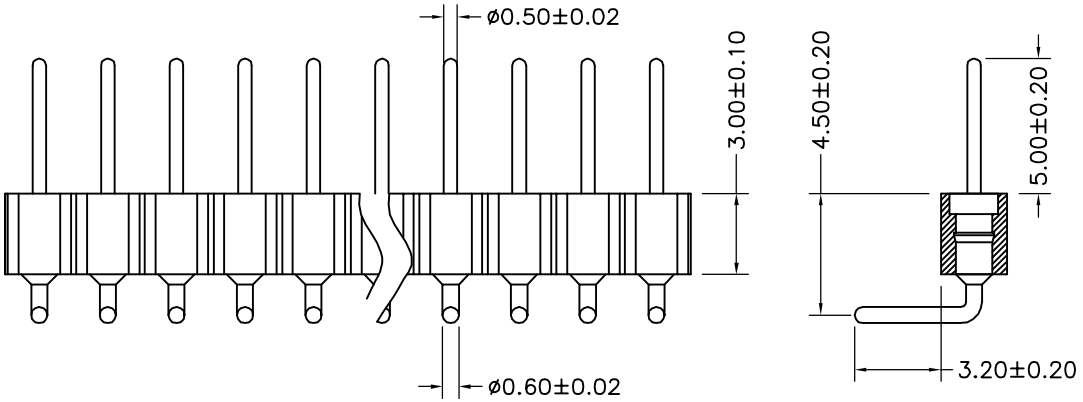

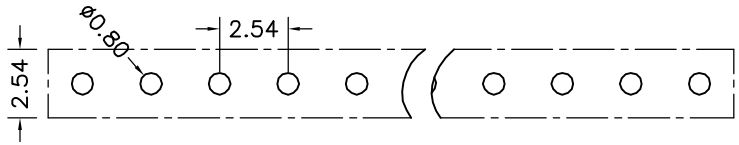

P.C.B LAYOUT

Technical Data
Materlal:
Pin(outer sleeve):Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin Plated:2μm/80μm″NI,5μm/200μ″Sn
Gold Plated:2μm″/80μm″Ni,0.8μ″ gold
Insuiator:PPS UL94V-0

Electrical:
Current rating:3Amps/contact max.
Contact resistance:≤4mΩ/contact
Insuiation resistance:≥1000MΩ at V=100V
Dleiectric Withstanding Voltage:1000V AV Min
Operaling voitage:60VAC/DC

Mechanical:
Operaling temperature:-40° C to+105° C
Soldering temperature:+255° C

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.	SHEET	1/1
				X. ±0.30 X° . ±5°		CHKD			DATE	2010.4.12
				.X ±0.20 .X° ±2°		APPD		PRODUCT NAME 2.54mm Machined Pin Header	UNITS	mm
A0				.XX ±0.08 .XX° ±1°		VIEW		PART. NO. MH254R-11-XX-1376	SCALE	1:1
VER	MODIFICATION	DRAW	DATE	.XXX ±0.03 .XXX° ±0.5°					DWG NO.	009