HSF

NOTES:
Current Rating: 3.0A
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −25℃ to +85℃

Contact Material: Brass
Contact plating: Au Or Sn Over Ni
Insulator Material: PA66 or PA46 (UL94V−0)

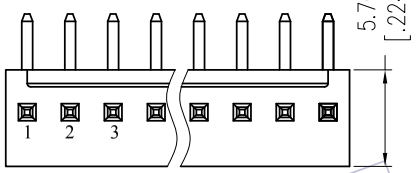

07--20PIN

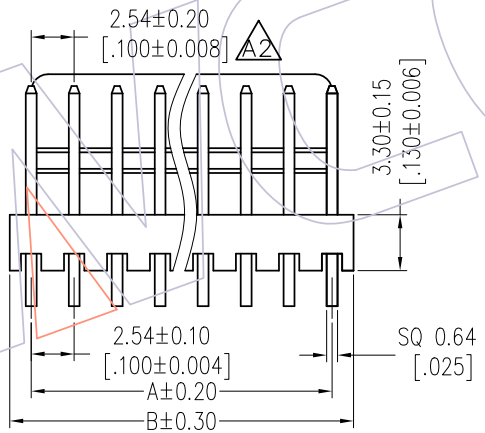

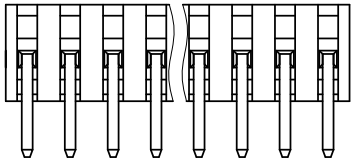



TYPE 1

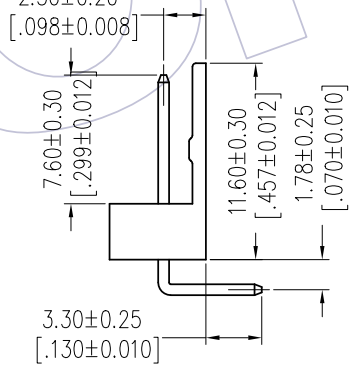

TYPE 2

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



Ordering Information

WF2541 -WR__ XX__ X 0 X

- No.of pins: 02~20P
- H=PA46, Blank=PA66
- Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin
- Color: B=Black, E= Beige, T=Natural
- Packing: 1=Type 1, 2=Type 2 (A1)

Specification & Ordering Information:

Circuit	Part No.	Dimension A	Dimension B	Q'TY/bag
02	WF2541−WR(X)02XXX0X	2.54	5.08	1,000
03	WF2541−WR(X)03XXX0X	5.08	7.62	1,000
04	WF2541−WR(X)04XXX0X	7.62	10.16	1,000
05	WF2541−WR(X)05XXX0X	10.16	12.70	1000
06	WF2541−WR(X)06XXX0X	12.70	15.24	500
07	WF2541−WR(X)07XXX0X	15.24	17.78	500
08	WF2541−WR(X)08XXX0X	17.78	20.32	500
09	WF2541−WR(X)09XXX0X	20.32	22.86	500
10	WF2541−WR(X)10XXX0X	22.86	25.40	500
11	WF2541−WR(X)11XXX0X	25.40	27.94	300
12	WF2541−WR(X)12XXX0X	27.94	30.48	300
13	WF2541−WR(X)13XXX0X	30.48	33.02	300
14	WF2541−WR(X)14XXX0X	33.02	35.56	300
15	WF2541−WR(X)15XXX0X	35.56	38.10	200
16	WF2541−WR(X)16XXX0X	38.10	40.64	200
17	WF2541−WR(X)17XXX0X	40.64	43.18	200
18	WF2541−WR(X)18XXX0X	43.18	45.72	200
19	WF2541−WR(X)19XXX0X	45.72	48.26	200
20	WF2541−WR(X)20XXX0X	48.26	50.80	200

(A1)

TYPE	PART NO.
TYPE 1	WF2541-WR(X)XXXXX01
TYPE 2	WF2541-WR(X)XXXXX02

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2020/05/05	Add Dimension (A2)	Du Ying
A1	2017/04/25	MODIFY (A1)	Ding
A0	2012/09/08	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Du Ying	DATE	2017/04/25
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. SEE TAB

TITLE: "M"TYPE 2.54 Wafer 90°

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com