

## Features

- ◆ 230 Watts peak pulse power ( $t_p = 8/20\mu s$ )
- ◆ Transient protection for high speed data lines to IEC 61000-4-2 (ESD)  $\pm 30kV$  (air),  $\pm 30kV$  (contact) IEC 61000-4-4 (EFT) 40A (5/50ns)
- ◆ Working voltages : 12.7V
- ◆ Protects one bidirectional line or two unidirectional lines
- ◆ Low operating and clamping voltages
- ◆ Solid-state silicon avalanche technology

## Mechanical Characteristics

- ◆ Package: SOT23
- ◆ Lead Finish: Matte Tin
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Pb-Free, Halogen Free, RoHS/WEEE Compliant


## Applications

- ◆ USB Power & Data Line Protection
- ◆ Monitors and Flat Panel Displays
- ◆ I<sup>2</sup>C Bus Protection
- ◆ Portable Instrumentation
- ◆ Set Top Box

## Ordering Information

Part Number	Qty per Reel	Reel Size
SDC15	3000	7"

## Dimensions and Pin Configuration



**Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$  unless otherwise specified)**


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 $\mu\text{s}$ )	$P_{pk}$	230	W
ESD per IEC61000-4-2 (Air)	$V_{ESD}$	$\pm 30$	kV
ESD per IEC61000-4-2 (Contact)		$\pm 30$	
Operating Temperature Range	$T_J$	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$

**Electrical Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise specified)**


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	$V_{RWM}$			12.7	V	
Breakdown Voltage	$V_{BR}$	13	15	17	V	$I_T=1\text{mA}$
Leakage Current	$I_{Leak}$			100	nA	$V_{RWM}=12.7\text{V}$
Clamping Voltage	$V_C$			18	V	$I_{PP}=1\text{A}, T_p=8/20\mu\text{s}$
Clamping Voltage	$V_C$			25	V	$I_{PP}=9\text{A}, T_p=8/20\mu\text{s}$
Junction Capacitance	$C_J$		45		pF	$V_R=0\text{V}, f=1\text{MHz}$

**PROTECTION PRODUCTS**  
Typical characteristics


**Fig1. 8/20μs Pulse Waveform**

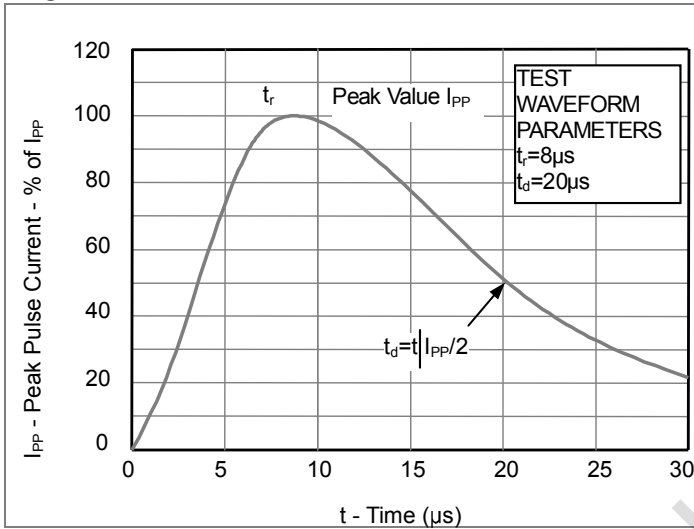


**Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)**

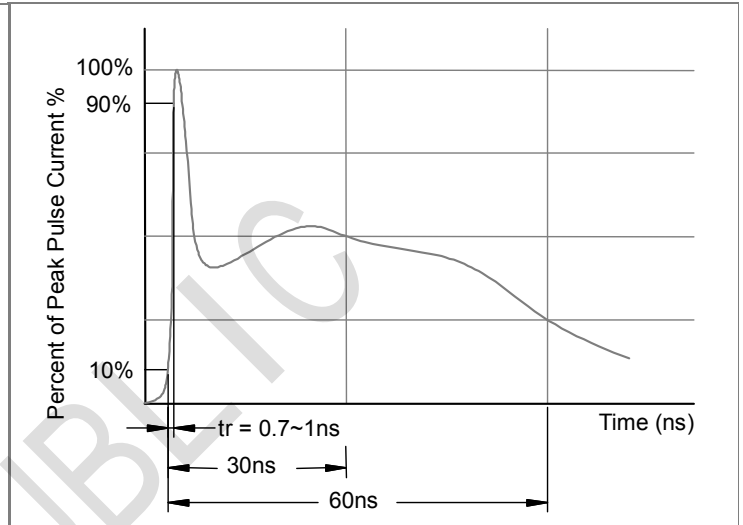

**Fig3. Power Derating Curve**

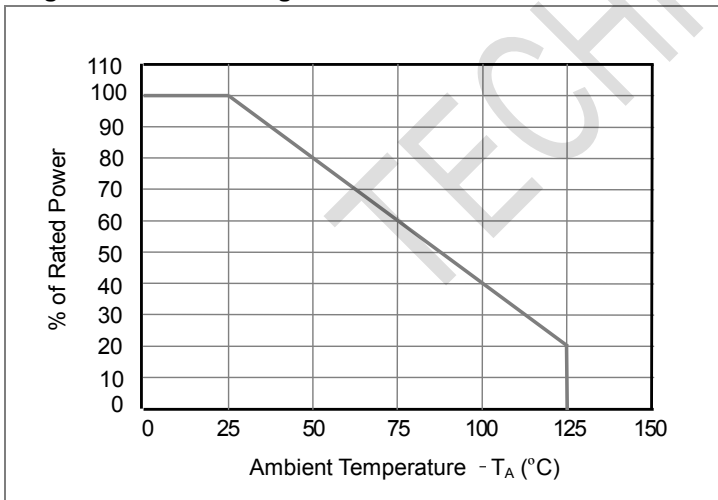

**Outline Drawing - SOT23**

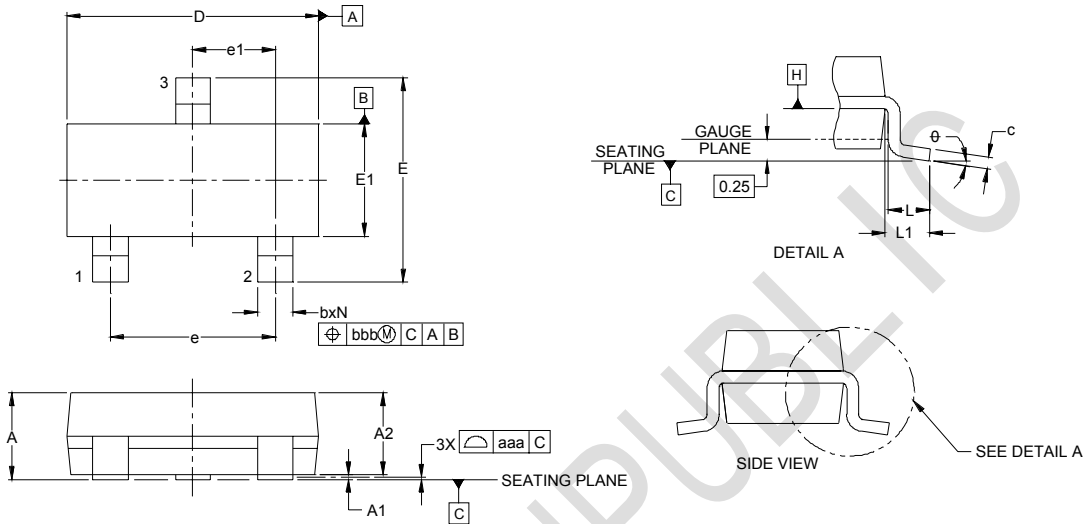

DIM	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	.035	-	.044	0.89	-	1.12
A1	.000	-	.004	0.01	-	0.10
A2	.035	.037	.040	0.88	0.95	1.02
b	.012	-	.020	0.30	-	0.51
c	.003	-	.007	0.08	-	0.18
D	.110	.114	.120	2.80	2.90	3.04
E	.082	.093	.104	2.10	2.37	2.64
E1	.047	.051	.055	1.20	1.30	1.40
e	.075			1.90 BSC		
e1	.037			0.95 BSC		
L	.015	.020	.024	0.40	0.50	0.60
L1	.022			(0.55)		
N	3			3		
theta	0°	-	8°	0°	-	8°
aaa	.004			0.10		
bbb	.008			0.20		

**Land Pattern - SOT23**

