HSF

NOTES:
Current Rating:1AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact plating:Au or Sn Over Ni
Insulator Material:PA9T+30%GF(UL94V−0)

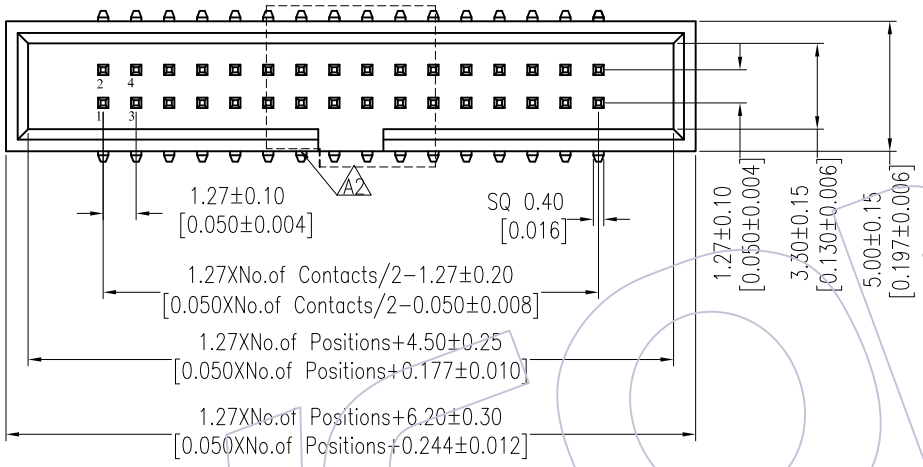

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

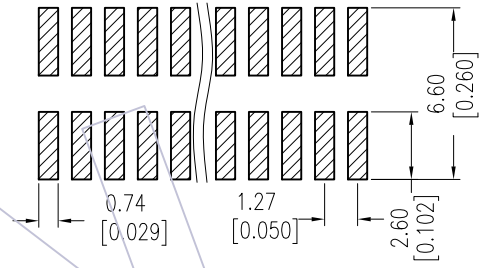

Ordering Information

3130- XX M XX B K00 X 1

No.of Pins	Contact Plating	Color Insulator	Packing
10 34	G0=Gold Flash	B=Black	A=Tray
14 40	G1=3u"Gold	U=Blue	T=Tube
16 44	G2=5u"Gold	W=White	P=Tube+CAP
20 50	G3=10u"Gold		R=Tape&Reel+CAP
24 60	G4=15u"Gold		
26 64	G5=30u"Gold		
30 80	S0=Gold Flash/Tin		
32 100	S1=3u"Gold/Tin		
	S2=5u"Gold/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

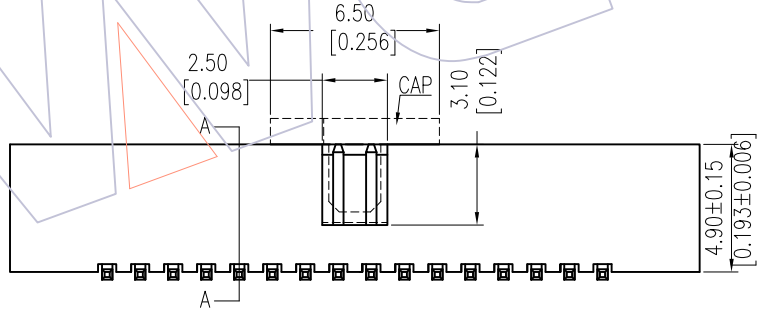

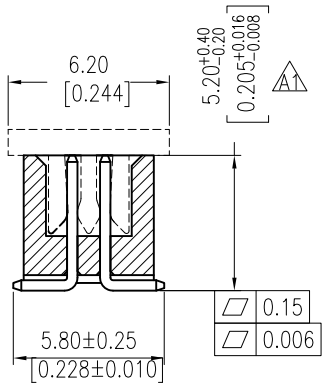

SECTION A−A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2012/08/30	Modify CAP	——
A1	2010/09/30	Change drawing	——
A0	2008/04/25	NEW	——

OPERATION		DRAW	DATE	SCALE	FIT
X.X	±0.40	Tsingsn	2012/08/30	UNIT	mm / inch
X.XX	±0.25	CHECK	DATE	SIZE	A4
X.XXX	±0.15				
Angle	± 3°	APPROVE	DATE	SHEET	1/1
DIM	TOL			PROJ.	

PART NO. 3130-XXMXXBK00X1
TITLE: 1.27 BOX HEADER SMT H=4.90
Customer NO.

WCON
Http: www.wcon.com
WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com
WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com