
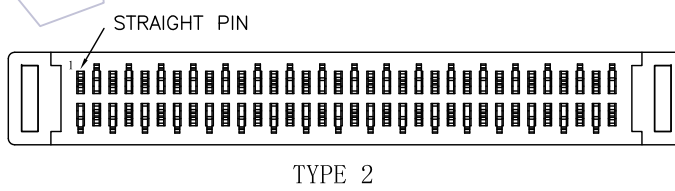
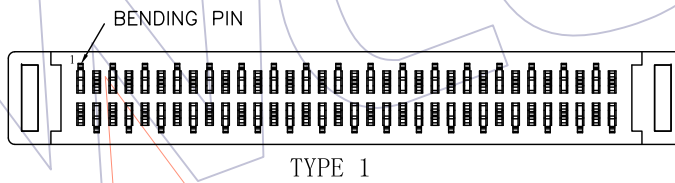
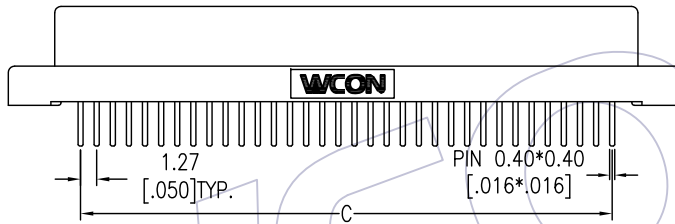

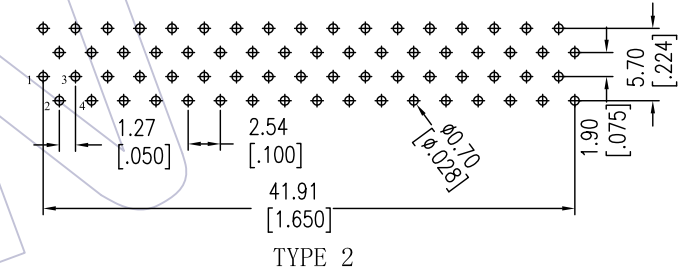
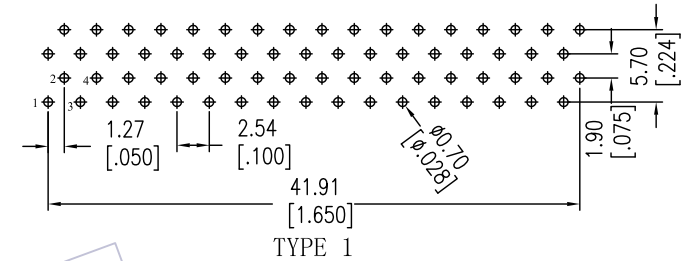


# HSF

NOTES:  
 Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/Minute  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PBT+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

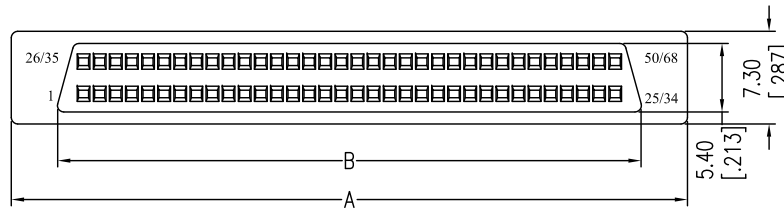

## Ordering Information

6311 - 0XX X D XX P N X 0X

No. of Pins per  
 50=50PIN  
 68=68PIN

Contact Plating  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin

Packing  
 A=Tray  
 T=Tube

Item	Pitch	Mating
Standard	1.27	6310
Alternate		

No. of Pins	Dimension		
	A	B	C
50	41.87	34.57	30.48
68	53.30	46.00	41.91

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW Ding	DATE	SCALE	FIT	PART NO.
A1	2018/03/02	Modify	-----	x.x ±0.40	CHECK	2018/03/02	UNIT	mm	6311-0XXXDXXPNX0X
AO	2012/11/13	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	68P FEMALE SCSI D-SUB 180° DIP
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com