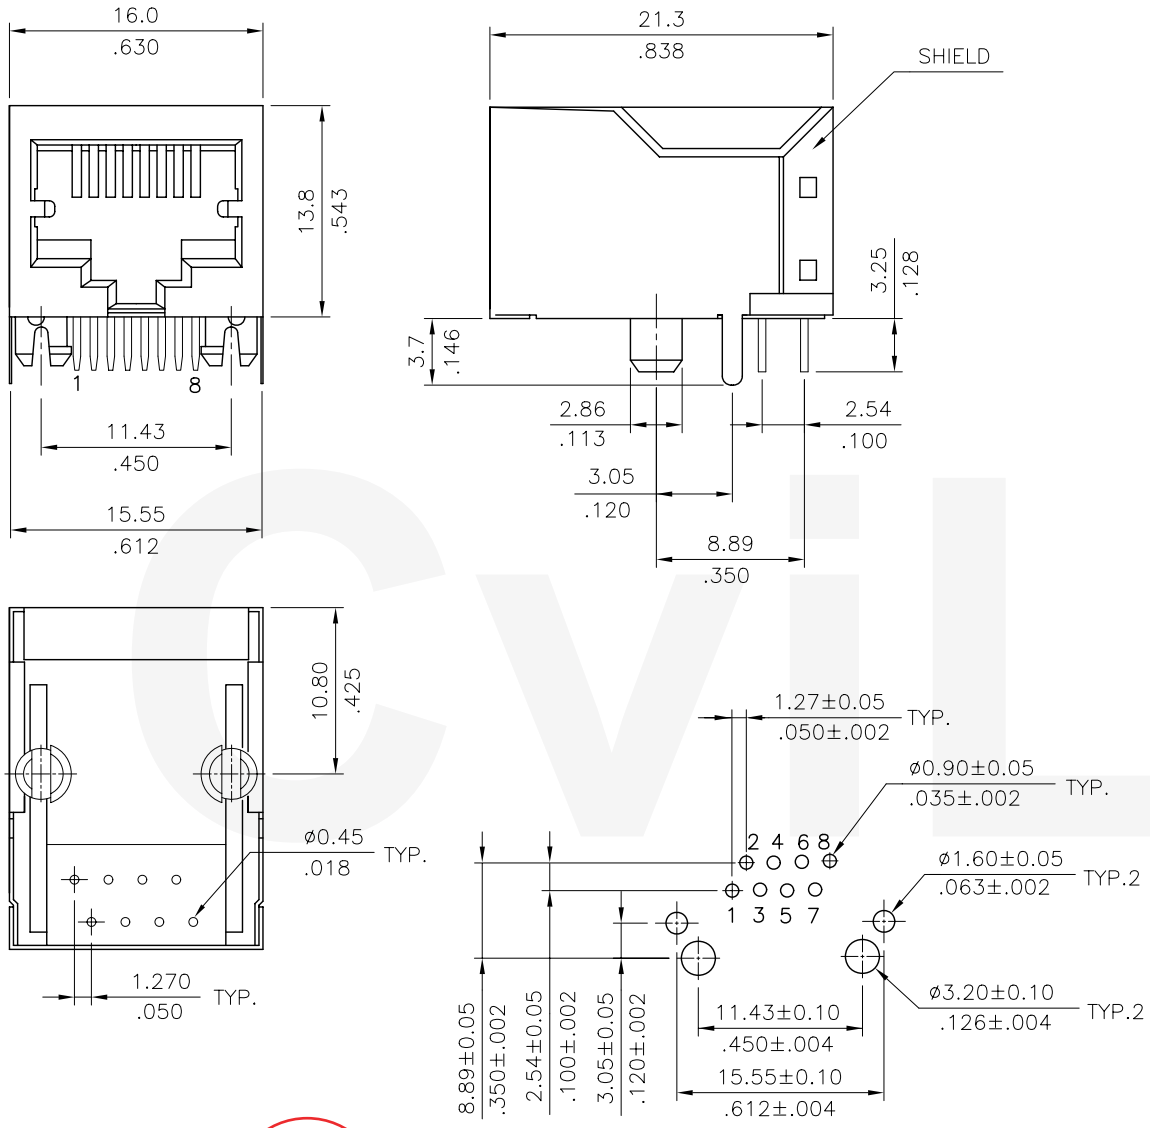

Recommended PC Board Layout

Materials :

Insulator : Glass filled Polyester UL 94V-0

Contact : Phosphor Bronze

Shield : Pre-tinned Brass

Ordering Code:

CJ58	8*	3	1	1	0	0
①	②	③	④	⑤	⑥	⑦

①Series No.

②Contacts: 88= 8P8C

③Plating code:

2= Gold flash plated over 1.27μm(50μ") Nickel

3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

5= 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel

④No. of port: 1= Single port

⑤Insulator color: 1= Black

⑥Panel Guound Code:

0= Non-Panel Ground

⑦Other option: 0= Standard

Lead Free Process

RoHS Compliant

CVILUX CORP.
2004.06.03
ISSUED

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1	SUN	5/21/04'	ECN04205/ECR04047-0

		DATE
DRAWN BY:	Sun	5/28-04'
ENGINEER:	Eisley	5/31-04'
CHECKED BY:	David	5/31-04'
APPROVED BY:	Alex	5/31-04'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: BOARD MOUNT SIDE ENTRY SHIELDED PCB JACK

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CJ5801SF	PART NO.	CJ588**1*00
SCALE	2 / 1	SHEET 1 OF 1	