

SK6017

300mA, Low Consumption, CMOS LDO


GENERAL DESCRIPTION

The SK6017 series are low dropout linear regulators and optimized to provide a high performance solution for battery power system to deliver low quiescent current. The devices offer a new level of cost effective performance in cellular phones, laptop and notebook computers, and other portable devices.


The SK6017 series are designed to make use of low cost ceramic capacitors which ensure the stability of the output current, and enhance the efficiency in order to prolong the battery life of those portable devices.

SK6017 can provide product selections of output value in the range of 1.2V~3.6V by every 0.1V step. The SK6017 regulators are available in SOT23-5L packages. Standard products are Pb-free and Halogen free products.

TYPICAL APPLICATION CIRCUIT

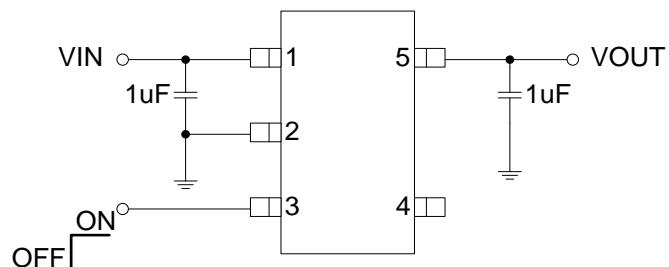

PIN ASSIGNMENT



(Top View)

FEATURES


- Input voltage: 2.5V~6.5V
- Output range: 1.2V~3.6V
(customized by every 0.1V step)
- Output current: 300mA @ $V_{OUT}>2V$
- Dropout voltage: 100mV @ $I_{OUT}=100mA$
- Quiescent current: 1μA Typ.
- Shut-down current: < 0.1μA
- Recommend capacitor: 1μF

APPLICATIONS

- Reference voltage source
- Toys
- Bluetooth, wireless handsets
- Others portable electronic device

TYPICAL PERFORMANCE

Quiescent Current vs. Input Voltage

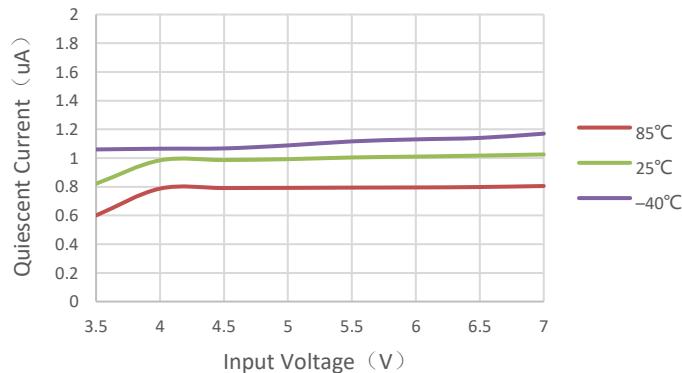

ORDER INFORMATION

PART NO	ACCURACY	PACAKGE	TEMPERATURE	TAPE & REEL
SK6017S5-XX	2%	SOT23-5L	-40 ~ +85°C	3000/REEL


Note: XX indicates 1.2V~3.6V by 0.1V step. For example, 33 means product outputs 3.3V.

PART NUMBER RULES

SK6017[1]-[2]

Code	Description
[1]	Package: S5: SOT23-5L
[2]	Voltage version: XX: 1.2V~3.6V by 0.1V step Example: 33: 3.3V

MARKING DESCRIPTION:



“N”: product code, here use “F” stands for “SK6017”.
 “X”: Voltage Code
 “Y”: Internal Control Code
 “W”: week of manufacturing. “A” stands for week 1,
 “Z” stands for week 26, “Ā” stands for week 27, “ĀĀ” stands for week 52.

PIN DESCRIPTION

PIN NO	SYMBOL	I/O	DESCRIPTION
SOT23-5L			
1	VIN	Power	Input
2	GND	Ground	Ground
3	CE	I	Chip Enable(Active high, do not float)
4	NC	/	Not Connected
5	VOUT	O	Output

ABSOLUTE MAXIMUM RATINGS (Note)

SYMBOL	ITEMS		VALUE	UNIT
V _{IN}	Input Voltage		-0.3~8	V
I _{OUT}	Output Current		350	mA
P _{DMAX}	Power Dissipation		0.3	W
T _J	Junction Temperature		-40~125	°C
T _A	Ambient Temperature		-40~85	°C
T _{STG}	Storage Temperature		-55~150	°C
T _{SOLDER}	Package Lead Soldering Temperature		260°C, 10s	

Note: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED OPERATING RANGE


SYMBOL	ITEMS	VALUE	UNIT
V _{IN}	V _{IN} Supply Voltage	2.5 to 6.5	V
I _{OUT}	Output Current	<300	mA
T _{OPT}	Operating Temperature	-40 to +85	°C

ELECTRICAL CHARACTERISTICS

The following specifications apply for V_{OUT}=3.3V T_A=25°C, unless specified otherwise.

SYMBOL	ITEMS	CONDITIONS	MIN	TYP	MAX	UNIT
V _{IN}	Input Voltage				6.5	V
V _{OUT}	Output Range	I _{OUT} =1mA	-2	V _{OUT}	2	%
I _Q	Quiescent Current	V _{OUT} =3.3V, I _{OUT} =0		1	2	μA
I _{LIMIT}	Current Limit	V _{IN} =V _{CE} , V _{IN} =3.8V, V _{OUT} =3.3V		300		mA
V _{DROP}	Dropout Voltage	V _{OUT} =3.3V, I _{OUT} =200mA		170	200	mV
		V _{OUT} =3.3V, I _{OUT} =250mA		250	300	
ΔV _{LINE}	Line Regulation	V _{IN} =2.7~5.5V, I _{OUT} =1mA		0.01	0.15	%/V
ΔV _{LOAD}	Load Regulation	V _{OUT} =2.8V, I _{OUT} =1~300mA		20	30	mV
I _{SHORT}	Short Current	V _{CE} =V _{IN} , V _{OUT} Short to GND with 1Ω		90		mA
I _{SHDN}	Shut-down Current	V _{CE} =0V		0.1	1	μA
V _{CEH}	CE Logic High Voltage	V _{IN} =5.5V, I _{OUT} =1mA	1.2		V _{IN}	V
V _{CEL}	CE Logic Low Voltage	V _{IN} =5.5V, V _{OUT} =0V			0.4	V
I _{CE}	CE Input Current	V _{CE} = 0 to 5.5V			1.0	μA


SIMPLIFIED BLOCK DIAGRAM

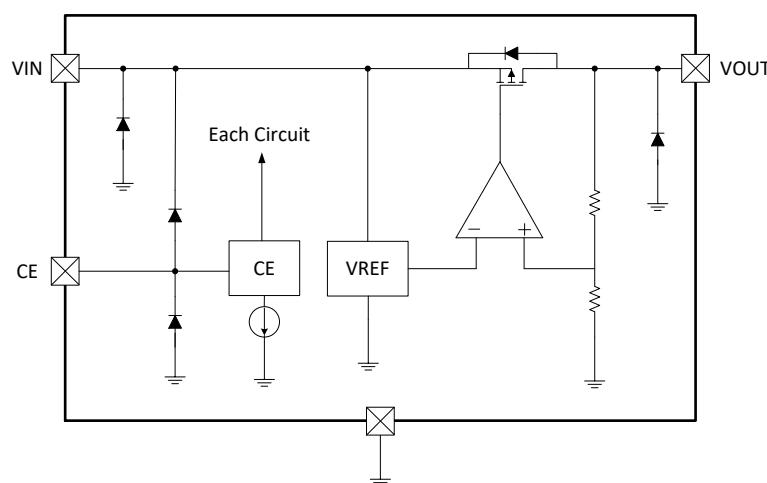


TYPICAL PERFORMANCE CHARACTERISTICS

$C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_{OPT}=25^{\circ}C$, $V_{IN}=5V$, $V_{OUT}=3.3V$


Line Regulation

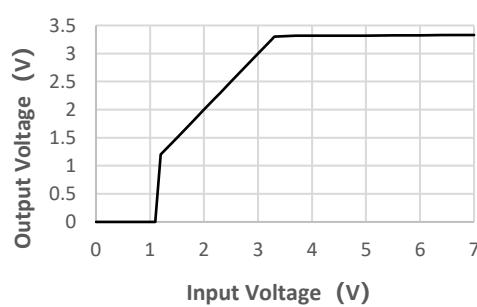


Load Regulation

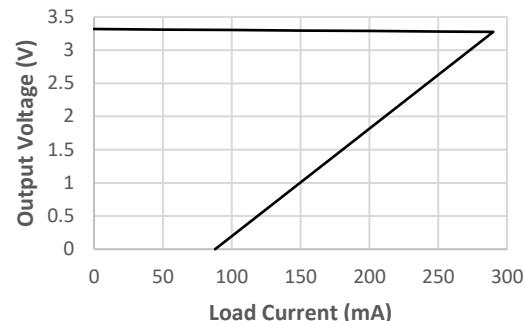


Dropout Voltage vs. Output Current

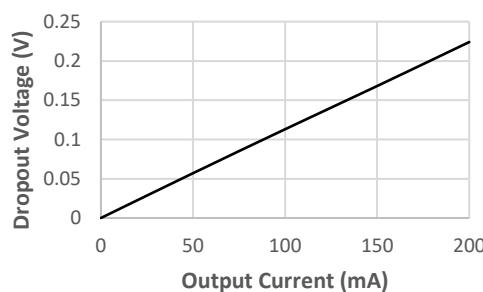


Quiescent Current vs. Input Voltage

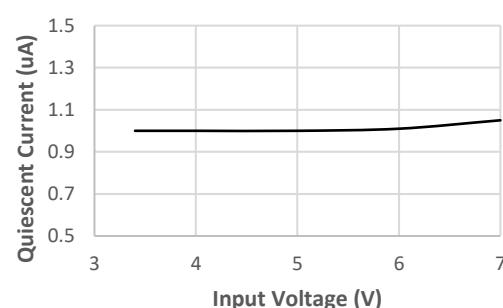


Current Limit vs. Input Voltage

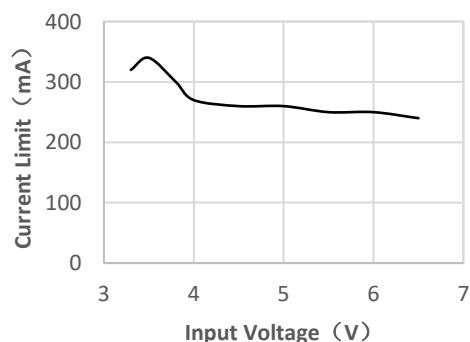


Short Current vs. Input Voltage

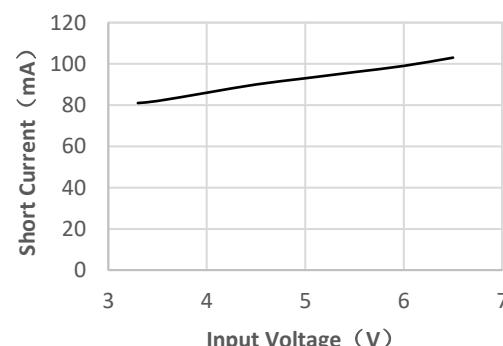


Output Voltage vs. Temperature

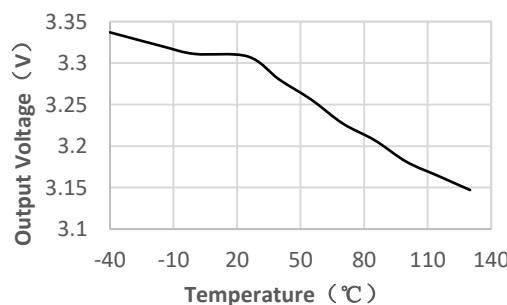


Power ON/OFF:

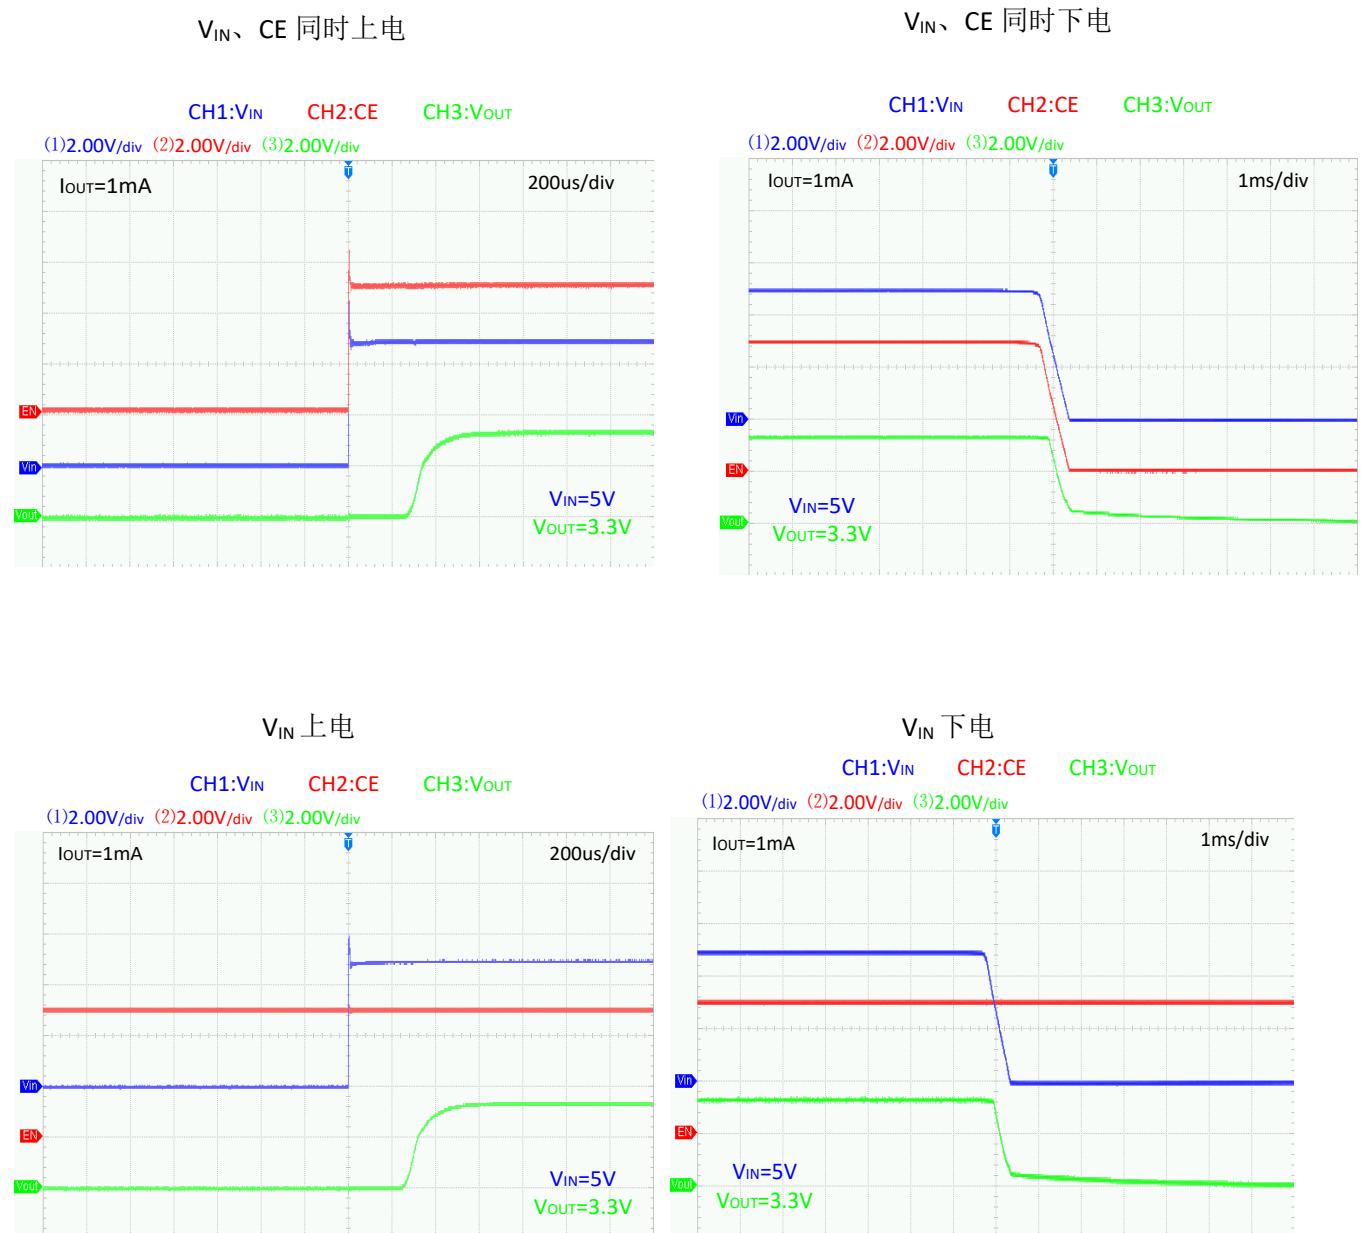

CE 上电

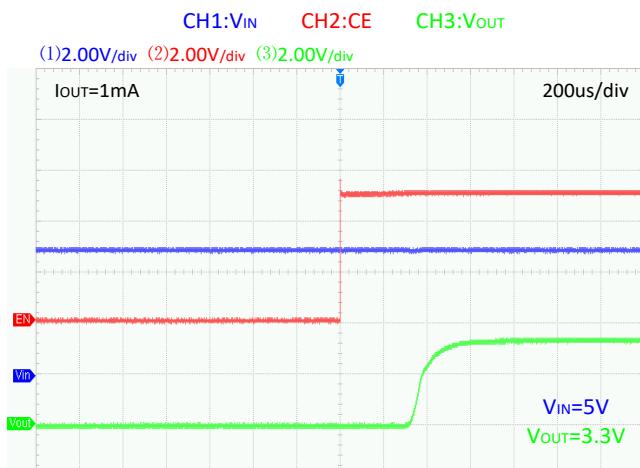


CE 下电

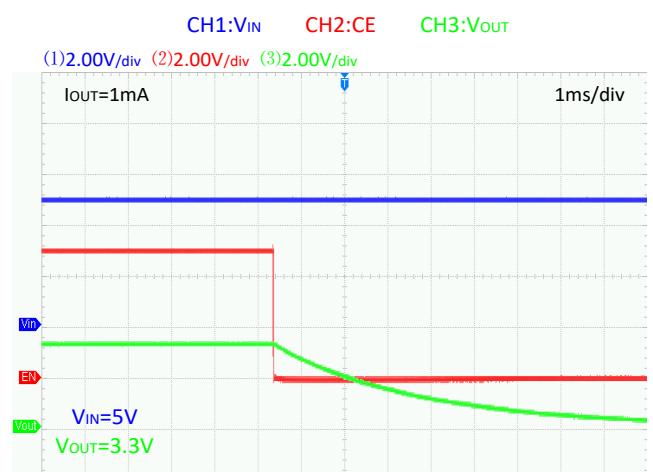


Line transient response:

V_{IN}=4V to 6.5V

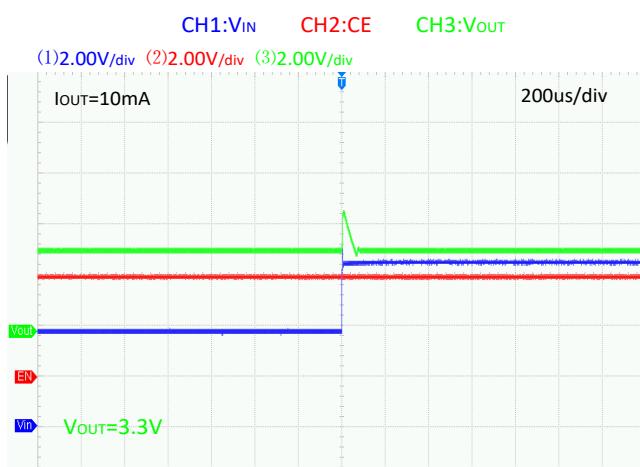


V_{IN}=6.5V to 4V

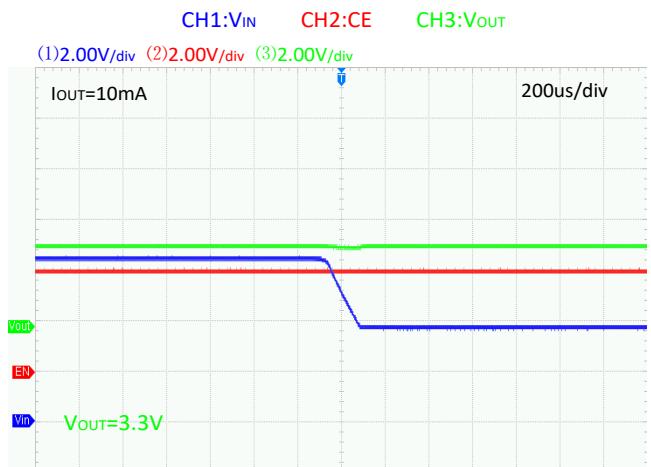


Load transient response:

I_{OUT} =50mA to 200mA

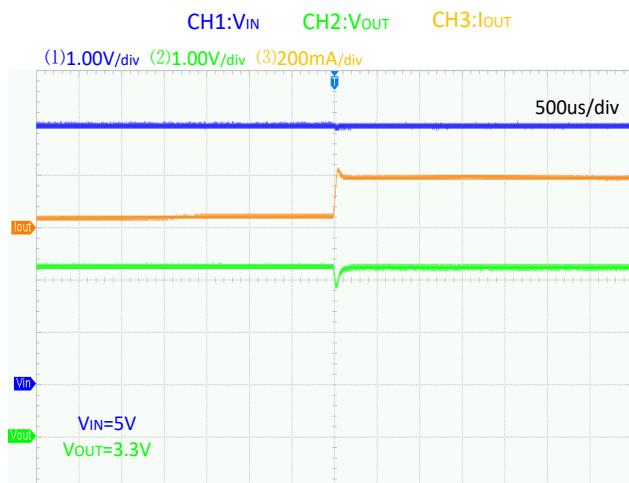

I_{OUT} =200mA to 50mA

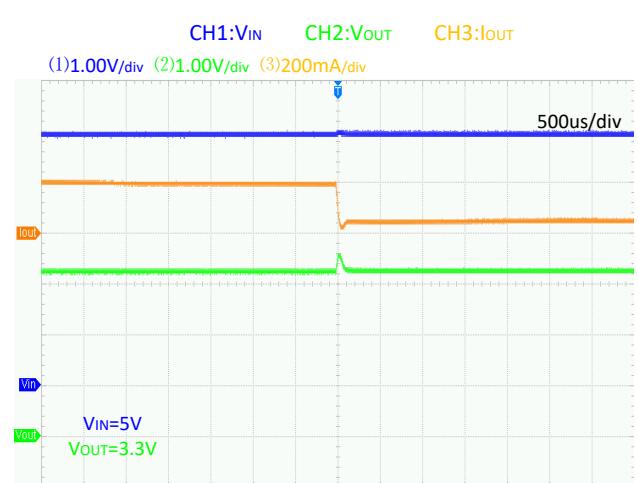




CH1:V_{IN} CH2:V_{OUT} CH3:I_{OUT}



CH1:V_{IN} CH2:V_{OUT} CH3:I_{OUT}



PACKAGE OUTLINE

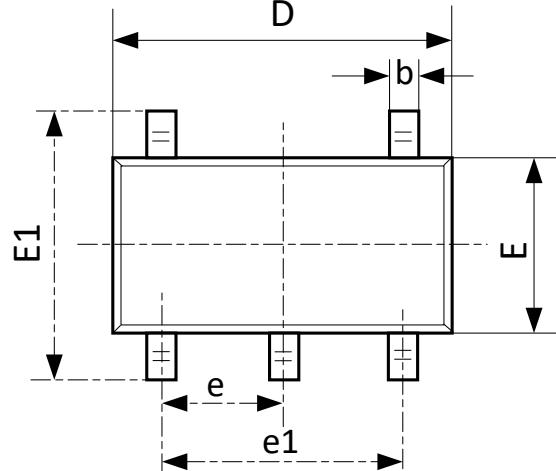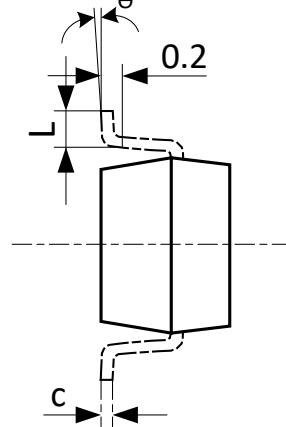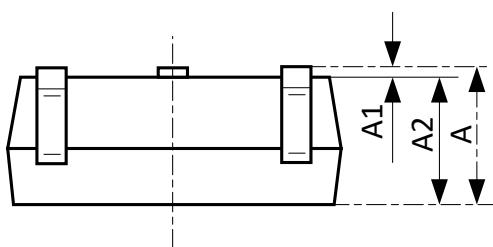Package	SOT23-5L	Devices per reel	3000Pcs	Unit	mm
Package Dimension:					
D		b			
E1			E		
e		e1			
					
					
					
Symbol	Dimensions In Millimeters		Dimensions In Inches		
	Min	Max	Min	Max	
A	1.050	1.250	0.041	0.049	
A1	0.000	0.100	0.000	0.004	
A2	1.050	1.150	0.041	0.045	
b	0.300	0.500	0.012	0.020	
c	0.100	0.200	0.004	0.008	
D	2.820	3.020	0.111	0.119	
E	1.500	1.700	0.059	0.067	
E1	2.650	2.950	0.104	0.116	
e	0.950(BSC)		0.037(BSC)		
e1	1.800	2.000	0.071	0.079	
L	0.300	0.600	0.012	0.024	
θ	0°C	8°C	0°C	8°C	