

### Recommended Application:

CK-408 clock for Intel® 845 chipset with P4 processor.

### Output Features:

- 3 Differential CPU Clock Pairs @ 3.3V
- 7 PCI (3.3V) @ 33.3MHz
- 3 PCI\_F (3.3V) @ 33.3MHz
- 1 USB (3.3V) @ 48MHz
- 1 DOT (3.3V) @ 48MHz
- 1 REF (3.3V) @ 14.318MHz
- 5 3V66 (3.3V) @ 66.6MHz
- 1 VCH/3V66 (3.3V) @ 48MHz or 66.6MHz

### Features:

- Supports spread spectrum modulation, down spread 0 to -0.5%.
- Efficient power management scheme through PD#, CPU\_STOP# and PCI\_STOP#.
- Uses external 14.318MHz crystal
- Stop clocks and functional control available through I<sup>2</sup>C interface.


### Key Specifications:

- CPU Output Jitter <150ps
- 3V66 Output Jitter <250ps
- CPU Output Skew <100ps, programmable over 800 ps with groups CPU0,1 and CPU2.

### Frequency Table

| FS2 | FS1 | FS0 | CPU (MHz) | 3V66 (MHz) | 66Buff[2:0] 3V66[4:2] (MHz) | PCI_F PCI (MHz) |
|-----|-----|-----|-----------|------------|-----------------------------|-----------------|
| 0   | 0   | 0   | 66.66     | 66.66      | 66.66                       | 33.33           |
| 0   | 0   | 1   | 100.00    | 66.66      | 66.66                       | 33.33           |
| 0   | 1   | 0   | 200.00    | 66.66      | 66.66                       | 33.33           |
| 0   | 1   | 1   | 133.33    | 66.66      | 66.66                       | 33.33           |
| Mid | 0   | 0   | Tristate  | Tristate   | Tristate                    | Tristate        |
| Mid | 0   | 1   | TCLK/2    | TCLK/4     | TCLK/4                      | TCLK/8          |
| Mid | 1   | 0   | Reserved  | Reserved   | Reserved                    | Reserved        |
| Mid | 1   | 1   | Reserved  | Reserved   | Reserved                    | Reserved        |


### Pin Configuration

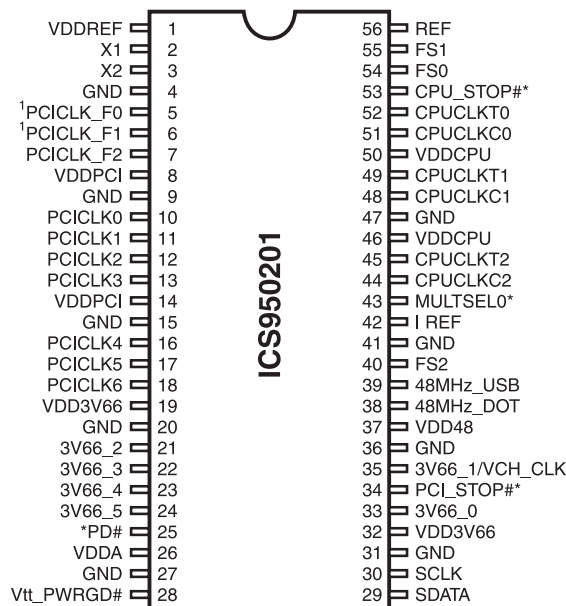

### 56-Pin SSOP & TSSOP

\* These inputs have 150K internal pull-up resistor to VDD.

Block Diagram

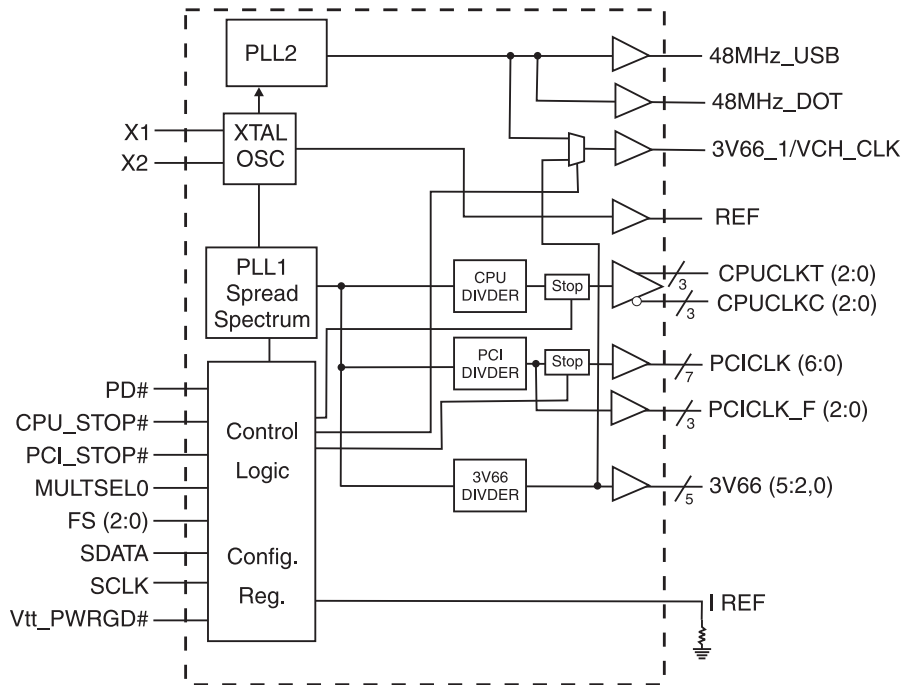

## Pin Description

| PIN NUMBER                       | PIN NAME       | TYPE              | DESCRIPTION   |
|----------------------------------|----------------|-------------------|---|
| 1, 8, 14, 19, 26, 32, 37, 46, 50 | VDD            | PWR               | 3.3V power supply   |
| 2                                | X1             | X2 Crystal Input  | 14.318MHz Crystal input   |
| 3                                | X2             | X1 Crystal Output | 14.318MHz Crystal output  |
| 7, 6, 5                          | PCICLK_F (2:0) | OUT               | Free running PCI clock not affected by PCI_STOP# for power management.  |
| 4, 9, 15, 20, 27, 31, 36, 41, 47 | GND            | PWR               | Ground pins for 3.3V supply   |
| 18, 17, 16, 13, 12, 11, 10       | PCICLK (6:0)   | OUT               | PCI clock outputs   |
| 24, 23, 22, 21                   | 3V66 (5:2)     | OUT               | 66MHz reference clocks, from internal VCO   |
| 24                               | 3V66_5         | OUT               | 66MHz reference clock, from internal VCO  |
| 25                               | PD#            | IN                | Invokes power-down mode. Active Low.  |
| 28                               | Vtt_PWRGD#     | IN                | This 3.3V LVTTTL input is a level sensitive strobe used to determine when FS(2:0) and MULTISEL0 inputs are valid and are ready to be sampled (active low)                   |
| 29                               | SDATA          | I/O               | Data pin for I <sup>2</sup> C circuitry 5V tolerant   |
| 30                               | SCLK           | IN                | Clock pin of I <sup>2</sup> C circuitry 5V tolerant   |
| 33                               | 3V66_0         | OUT               | 66MHz reference clocks, from internal VCO   |
| 34                               | PCI_STOP#      | IN                | Halts PCICLK clocks at logic 0 level, when input low except PCICLK_F which are free running   |
| 35                               | 3V66_1/VCH_CLK | OUT               | 3.3V output selectable through I <sup>2</sup> C to be 66MHz from internal VCO or 48MHz (non-SSC)  |
| 38                               | 48MHz_DOT      | OUT               | 48MHz output clock for DOT  |
| 39                               | 48MHz_USB      | OUT               | 48MHz output clock for USB  |
| 40                               | FS2            | IN                | Special 3.3V input for Mode selection, cannot be logic 1  |
| , 42                             | I REF          | OUT               | This pin establishes the reference current for the CPUCLK pairs. This pin requires a fixed precision resistor tied to ground in order to establish the appropriate current. |
| 43                               | MULTSEL0       | IN                | 3.3V LVTTTL input for selecting the current multiplier for CPU outputs  |
| 44, 48, 51                       | CPUCLKC (2:0)  | OUT               | "Complementary" clocks of differential pair CPU outputs. These are current outputs and external resistors are required for voltage bias.                                    |
| 45, 49, 52                       | CPUCLKT (2:0)  | OUT               | "True" clocks of differential pair CPU outputs. These are current outputs and external resistors are required for voltage bias.   |
| 53                               | CPU_STOP#      | IN                | Halts CPUCLK clocks at logic 0 level, when input low  |
| 55, 54                           | FS (1:0)       | IN                | Frequency select pins   |
| 56                               | REF            | OUT               | 14.318MHz reference clock.  |

## Power Groups

### (Analog)

VDDA = Analog Core PLL1

VDDREF = REF, Xtal

VDD48 = 48MHz, PLL

### (Digital)

VDDPCI

VDD3V66

VDDCPU

**Truth Table**

| FS2 | FS1 | FS0 | CPU (MHz) | 3V66 (5:0) (MHz) | PCI_F PCI (MHz) | REF0 (MHz) | USB/DOT (MHz) |
|-----|-----|-----|-----------|------------------|-----------------|------------|---------------|
| 0   | 0   | 0   | 66.66     | 66.66            | 33.33           | 14.318     | 48.00         |
| 0   | 0   | 1   | 100.00    | 66.66            | 33.33           | 14.318     | 48.00         |
| 0   | 1   | 0   | 200.00    | 66.66            | 33.33           | 14.318     | 48.00         |
| 0   | 1   | 1   | 133.33    | 66.66            | 33.33           | 14.318     | 48.00         |
| Mid | 0   | 0   | Tristate  | Tristate         | Tristate        | Tristate   | Tristate      |
| Mid | 0   | 1   | TCLK/2    | TCLK/4           | TCLK/8          | TCLK       | TCLK/2        |
| Mid | 1   | 0   | Reserved  | Reserved         | Reserved        | Reserved   | Reserved      |
| Mid | 1   | 1   | Reserved  | Reserved         | Reserved        | Reserved   | Reserved      |

**Maximum Allowed Current**

|                    |  |
|--------------------|--|
| <b>Condition</b>   | Max 3.3V supply consumption<br>Max discrete cap loads,<br>V <sub>dd</sub> = 3.465V<br>All static inputs = V <sub>dd</sub> or GND |
| <b>Full Active</b> | 360mA  |

**Host Swing Select Functions**

| MULTISELO | Board Target Trace/Term Z | Reference R, I <sub>ref</sub> = V <sub>DD</sub> /(3*R <sub>r</sub> ) | Output Current             | V <sub>oh</sub> @ Z |
|-----------|---------------------------|--|----------------------------|---------------------|
| 1         | 50 ohms                   | R <sub>r</sub> = 475 1%, I <sub>ref</sub> = 2.32mA                   | I <sub>oh</sub> = 6* I REF | 0.7V @ 50           |

## General I<sup>2</sup>C serial interface information

The information in this section assumes familiarity with I<sup>2</sup>C programming.  
 For more information, contact IDT for an I<sup>2</sup>C programming application note.

### How to Write:

- Controller (host) sends a start bit.
- Controller (host) sends the write address D2<sub>(H)</sub>
- ICS clock will **acknowledge**
- Controller (host) sends a dummy command code
- ICS clock will **acknowledge**
- Controller (host) sends a dummy byte count
- ICS clock will **acknowledge**
- Controller (host) starts sending first byte (Byte 0) through byte 5
- ICS clock will **acknowledge** each byte **one at a time**.
- Controller (host) sends a Stop bit

### How to Read:

- Controller (host) will send start bit.
- Controller (host) sends the read address D3<sub>(H)</sub>
- ICS clock will **acknowledge**
- ICS clock will send the **byte count**
- Controller (host) acknowledges
- ICS clock sends first byte (**Byte 0**) through **byte 6**
- Controller (host) will need to acknowledge each byte
- Controller (host) will send a stop bit

| How to Write:                |                      |
|------------------------------|----------------------|
| Controller (Host)            | ICS (Slave/Receiver) |
| Start Bit                    |                      |
| Address<br>D2 <sub>(H)</sub> |                      |
|                              | <b>ACK</b>           |
| Dummy Command Code           |                      |
|                              | <b>ACK</b>           |
| Dummy Byte Count             |                      |
|                              | <b>ACK</b>           |
| Byte 0                       |                      |
|                              | <b>ACK</b>           |
| Byte 1                       |                      |
|                              | <b>ACK</b>           |
| Byte 2                       |                      |
|                              | <b>ACK</b>           |
| Byte 3                       |                      |
|                              | <b>ACK</b>           |
| Byte 4                       |                      |
|                              | <b>ACK</b>           |
| Byte 5                       |                      |
|                              | <b>ACK</b>           |
| Byte 6                       |                      |
|                              | <b>ACK</b>           |
| Stop Bit                     |                      |

| How to Read:                 |                      |
|------------------------------|----------------------|
| Controller (Host)            | ICS (Slave/Receiver) |
| Start Bit                    |                      |
| Address<br>D3 <sub>(H)</sub> |                      |
|                              | <b>ACK</b>           |
|                              | <b>Byte Count</b>    |
| ACK                          |                      |
|                              | <b>Byte 0</b>        |
| ACK                          |                      |
|                              | <b>Byte 1</b>        |
| ACK                          |                      |
|                              | <b>Byte 2</b>        |
| ACK                          |                      |
|                              | <b>Byte 3</b>        |
| ACK                          |                      |
|                              | <b>Byte 4</b>        |
| ACK                          |                      |
|                              | <b>Byte 5</b>        |
| ACK                          |                      |
|                              | <b>Byte 6</b>        |
| ACK                          |                      |
| Stop Bit                     |                      |

### Notes:

1. The ICS clock generator is a slave/receiver, I<sup>2</sup>C component. It can read back the data stored in the latches for verification. **Read-Back will support Intel PIIX4 "Block-Read" protocol.**
2. The data transfer rate supported by this clock generator is 100K bits/sec or less (standard mode)
3. The input is operating at 3.3V logic levels.
4. The data byte format is 8 bit bytes.
5. To simplify the clock generator I<sup>2</sup>C interface, the protocol is set to use only "**Block-Writes**" from the controller. The bytes must be accessed in sequential order from lowest to highest byte with the ability to stop after any complete byte has been transferred. The Command code and Byte count shown above must be sent, but the data is ignored for those two bytes. The data is loaded until a Stop sequence is issued.
6. At power-on, all registers are set to a default condition, as shown.

**Byte 0: Control Register**

| Bit   | Pin# | Name                   | PWD <sup>2</sup> | Type <sup>1</sup> | Description   |
|-------|------|------------------------|------------------|-------------------|---|
| Bit 0 | 54   | FS0                    | X                | R                 | Reflects the value of FS0 pin sampled on power up                 |
| Bit 1 | 55   | FS1                    | X                | R                 | Reflects the value of FS1 pin sampled on power up                 |
| Bit 2 | 40   | FS2                    | X                | R                 | Reflects the value of FS2 pin sampled on power up                 |
| Bit 3 | 34   | PCI_STOP# <sup>3</sup> | X                | R                 | Hardware mode: Reflects the value of PCI_STOP# pin sampled on PWD |
|       |      |                        | 1                | RW                | Software mode:<br>0=PCICLK stopped<br>1=PCICLK not stopped        |
| Bit 4 | 53   | CPU_STOP#              | X                | R                 | Reflects the current value of the external CPU_STOP# pin          |
| Bit 5 | 35   | 3V66_1/VCH             | 0                | RW                | VCH Select 66MHz/48MHz<br>0=66MHz, 1=48MHz                        |
| Bit 6 | -    |                        | 0                |                   | (Reserved)  |
| Bit 7 | -    | Spread Enabled         | 0                | RW                | 0=Spread Off, 1=Spread On   |

**Byte 1: Control Register**

| Bit   | Pin#   | Name                 | PWD <sup>2</sup> | Type <sup>1</sup> | Description  |
|-------|--------|----------------------|------------------|-------------------|--|
| Bit 0 | 52, 51 | CPUCLKT0<br>CPUCLKC0 | 1                | RW                | 0=Disabled 1=Enabled <sup>4</sup>  |
| Bit 1 | 49, 48 | CPUCLKT1<br>CPUCLKC1 | 1                | RW                | 0=Disabled 1=Enabled <sup>4</sup>  |
| Bit 2 | 45, 44 | CPUCLKT2<br>CPUCLKC2 | 1                | RW                | 0=Disabled 1=Enabled <sup>4</sup>  |
| Bit 3 | 52, 51 | CPUCLKT0<br>CPUCLKC0 | 0                | RW                | Allow control of CPUCLKT0/C0 with assertion of CPU_STOP# 0=Not free running 1=Free running |
| Bit 4 | 49, 48 | CPUCLKT1<br>CPUCLKC1 | 0                | RW                | Allow control of CPUCLKT1/C1 with assertion of CPU_STOP# 0=Not free running 1=Free running |
| Bit 5 | 45, 44 | CPUCLKT2<br>CPUCLKC2 | 0                | RW                | Allow control of CPUCLKT2/C2 with assertion of CPU_STOP# 0=Not free running 1=Free running |
| Bit 6 | -      | -                    | 0                | -                 | (Reserved)   |
| Bit 7 | 43     | MULTSELO             | X                | R                 | Reflects the current value of MULTSELO   |

**Notes:**

1. R= Read only RW= Read and Write
2. PWD = Power on Default
3. The purpose of this bit is to allow a system designer to implement PCI\_STOP functionality in one of two ways. With the system designer can choose to use the externally provided PCI\_STOP# pin to assert and de-assert PCI\_STOP functionality via I<sup>2</sup>C Byte 0 Bit 3.

In Hardware mode it is not allowed to write to the I<sup>2</sup>C Byte 0 Bit3. In Software mode it is not allowed to pull the external PCI\_STOP pin low. This avoids the issues related with Hardware started and software stopped PCI\_STOP conditions. The clock chip is to be operated in the Hardware or Software PCI\_STOP mode ONLY, it is not allowed to mix these modes.

In Hardware mode the I<sup>2</sup>C byte 0 Bit 3 is R/W and should reflect the status of the part. Whether or not the chip is in PCI\_STOP mode.

Functionality PCI\_STOP mode should be entered when [(PCI\_STOP#=0) or (I<sup>2</sup>C Byte 0 Bit 3 = 0)].

4. For disabled clocks, they stop low for single ended clocks. Differential CPU clocks stop with CPUCLKT at high, CPUCLKC off, and external resistor termination will bring CPUCLKC low.

## Byte 2: Control Register

| Bit   | Pin# | Name    | PWD | Type | Description          |
|-------|------|---------|-----|------|----------------------|
| Bit 0 | 10   | PCICLK0 | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 1 | 11   | PCICLK1 | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 2 | 12   | PCICLK2 | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 3 | 13   | PCICLK3 | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 4 | 16   | PCICLK4 | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 5 | 17   | PCICLK5 | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 6 | 18   | PCICLK6 | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 7 | -    | -       | 0   | -    | (Reserved)           |

## Byte 3: Control Register

| Bit   | Pin# | Name      | PWD | Type | Description  |
|-------|------|-----------|-----|------|--|
| Bit 0 | 5    | PCICLK_F0 | 1   | RW   | 0=Disabled 1=Enabled   |
| Bit 1 | 6    | PCICLK_F1 | 1   | RW   | 0=Disabled 1=Enabled   |
| Bit 2 | 7    | PCICLK_F2 | 1   | RW   | 0=Disabled 1=Enabled   |
| Bit 3 | 5    | PCICLK_F0 | 0   | RW   | Allow control of PCICLK_F0 with assertion of PCI_STOP#. 0=Free Running, 1=Not free running |
| Bit 4 | 6    | PCICLK_F1 | 0   | RW   | Allow control of PCICLK_F1 with assertion of PCI_STOP#. 0=Free Running, 1=Not free running |
| Bit 5 | 7    | PCICLK_F2 | 0   | RW   | Allow control of PCICLK_F2 with assertion of PCI_STOP#. 0=Free Running, 1=Not free running |
| Bit 6 | 39   | 48MHz_USB | 1   | RW   | 0=Disabled 1=Enabled   |
| Bit 7 | 38   | 48MHz_DOT | 1   | RW   | 0=Disabled 1=Enabled   |

## Byte 4: Control Register

| Bit   | Pin# | Name           | PWD | Type | Description          |
|-------|------|----------------|-----|------|----------------------|
| Bit 0 | 21   | 3V66-2         | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 1 | 22   | 3V66-3         | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 2 | 23   | 3V66-4         | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 3 | 24   | 3V66_5         | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 4 | 35   | 3V66_1/VCH_CLK | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 5 | 33   | 3V66_0         | 1   | RW   | 0=Disabled 1=Enabled |
| Bit 6 | -    | -              | 0   | R    | (Reserved)           |
| Bit 7 | -    | -              | 0   | R    | (Reserved)           |

## Notes:

1. R= Read only RW= Read and Write
2. PWD = Power on Default

## Absolute Maximum Ratings

|                               |                                |
|-------------------------------|--------------------------------|
| Supply Voltage                | 5.5 V                          |
| Logic Inputs                  | GND -0.5 V to $V_{DD} + 0.5 V$ |
| Ambient Operating Temperature | 0°C to +70°C                   |
| Case Temperature              | 115°C                          |
| Storage Temperature           | -65°C to +150°C                |

Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only and functional operation of the device at these or any other conditions above those listed in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

## Electrical Characteristics - Input/Supply/Common Output Parameters

$T_A = 0 - 70^\circ\text{C}$ ; Supply Voltage  $V_{DD} = 3.3 V \pm 5\%$

| PARAMETER                      | SYMBOL             | CONDITIONS  | MIN            | TYP    | MAX            | UNITS         |
|--------------------------------|--------------------|---|----------------|--------|----------------|---------------|
| Input High Voltage             | $V_{IH}$           |   | 2              |        | $V_{DD} + 0.3$ | V             |
| Input Low Voltage              | $V_{IL}$           |   | $V_{SS} - 0.3$ |        | 0.8            | V             |
| Input High Current             | $I_{IH}$           | $V_{IN} = V_{DD}$                                 | -5             |        | 5              | $\mu\text{A}$ |
| Input Low Current              | $I_{IL1}$          | $V_{IN} = 0 V$ ; Inputs with no pull-up resistors | -5             |        |                | $\mu\text{A}$ |
|                                | $I_{IL2}$          | $V_{IN} = 0 V$ ; Inputs with pull-up resistors    | -200           |        |                |               |
| Operating Supply Current       | $I_{DD3.3OP}$      | $C_L = \text{Full load}$ ; Select @ 100 MHz       | 229            | 240    | 360            | mA            |
|                                | $I_{DD3.3OP}$      | $C_L = \text{Full load}$ ; Select @ 133 MHz       | 220            | 236    | 360            | mA            |
|                                | $I_{DD3.3OP}$      | $C_L = \text{Full load}$ ; Select @ 200 MHz       | 234            | 245    | 360            | mA            |
| Powerdown Current              | $I_{DD3.3PD}$      |   |                |        | 45             | mA            |
| Input Frequency                | $F_i$              | $V_{DD} = 3.3 V$                                  |                | 14.318 |                | MHz           |
| Pin Inductance                 | $L_{pin}$          |   |                |        | 7              | nH            |
| Input Capacitance <sup>1</sup> | $C_{IN}$           | Logic Inputs                                      |                |        | 5              | pF            |
|                                | $C_{OUT}$          | Output pin capacitance                            |                |        | 6              | pF            |
|                                | $C_{INX}$          | X1 & X2 pins                                      | 27             |        | 45             | pF            |
| Transition time <sup>1</sup>   | $T_{trans}$        | To 1st crossing of target frequency               |                |        | 3              | ms            |
| Settling time <sup>1</sup>     | $T_s$              | From 1st crossing to 1% target frequency          |                |        | 3              | ms            |
| Clk Stabilization <sup>1</sup> | $T_{STAB}$         | From $V_{DD} = 3.3 V$ to 1% target frequency      |                |        | 3              | ms            |
| Delay <sup>1</sup>             | $t_{PZH}, t_{PZL}$ | Output enable delay (all outputs)                 | 1              |        | 10             | ns            |
|                                | $t_{PHZ}, t_{PLZ}$ | Output disable delay (all outputs)                | 1              |        | 10             | ns            |

<sup>1</sup>Guaranteed by design, not 100% tested in production.



### Electrical Characteristics - CPU 0.7V Current Mode Differential Pair

$T_A = 0 - 70^\circ\text{C}$ ;  $V_{DD} = 3.3\text{ V} \pm 5\%$ ;  $C_L = 2\text{pF}$

| PARAMETER                       | SYMBOL                | CONDITIONS   | MIN    | TYP | MAX     | UNITS    | NOTES |
|---------------------------------|-----------------------|--|--------|-----|---------|----------|-------|
| Current Source Output Impedance | $Z_o^1$               | $V_O = V_x$  | 3000   |     |         | $\Omega$ | 1     |
| Voltage High                    | VHigh                 | Statistical measurement on single ended signal using oscilloscope math function. | 660    | 770 | 850     | mV       | 1     |
| Voltage Low                     | VLow                  |  | -150   | 5   | 150     |          | 1     |
| Max Voltage                     | Vovs                  | Measurement on single ended signal using absolute value.                         |        | 756 | 1150    | mV       | 1     |
| Min Voltage                     | Vuds                  |  | -300   | -7  |         |          | 1     |
| Crossing Voltage (abs)          | Vcross(abs)           |  | 250    | 350 | 550     | mV       | 1     |
| Crossing Voltage (var)          | d-Vcross              | Variation of crossing over all edges   |        | 12  | 140     | mV       | 1     |
| Long Accuracy                   | ppm                   | see Tperiod min-max values   | -300   |     | 300     | ppm      | 1,2   |
| Average period                  | Tperiod               | 200MHz nominal   | 4.9985 |     | 5.0015  | ns       | 2     |
|                                 |                       | 200MHz spread  | 4.9985 |     | 5.0266  | ns       | 2     |
|                                 |                       | 166.66MHz nominal  | 5.9982 |     | 6.0018  | ns       | 2     |
|                                 |                       | 166.66MHz spread   | 5.9982 |     | 6.0320  | ns       | 2     |
|                                 |                       | 133.33MHz nominal  | 7.4978 |     | 7.5023  | ns       | 2     |
|                                 |                       | 133.33MHz spread   | 7.4978 |     | 5.4000  | ns       | 2     |
|                                 |                       | 100.00MHz nominal  | 9.9970 |     | 10.0030 | ns       | 2     |
|                                 |                       | 100.00MHz spread   | 9.9970 |     | 10.0533 | ns       | 2     |
| Absolute min period             | $T_{absmin}$          | 200MHz nominal   | 4.8735 |     |         | ns       | 1,2   |
|                                 |                       | 166.66MHz nominal/spread   | 5.8732 |     |         | ns       | 1,2   |
|                                 |                       | 133.33MHz nominal/spread   | 7.3728 |     |         | ns       | 1,2   |
|                                 |                       | 100.00MHz nominal/spread   | 9.8720 |     |         | ns       | 1,2   |
| Rise Time                       | $t_r$                 | $V_{OL} = 0.175\text{V}$ , $V_{OH} = 0.525\text{V}$                              | 175    | 332 | 700     | ps       | 1     |
| Fall Time                       | $t_f$                 | $V_{OH} = 0.525\text{V}$ $V_{OL} = 0.175\text{V}$                                | 175    | 344 | 700     | ps       | 1     |
| Rise Time Variation             | d- $t_r$              |  |        | 30  | 125     | ps       | 1     |
| Fall Time Variation             | d- $t_f$              |  |        | 30  | 125     | ps       | 1     |
| Duty Cycle                      | $d_{t3}$              | Measurement from differential waveform   | 45     | 49  | 55      | %        | 1     |
| Skew                            | $t_{sk3}$             | $V_T = 50\%$   |        | 8   | 100     | ps       | 1     |
| Jitter, Cycle to cycle          | $t_{j\text{cyc-cyc}}$ | Measurement from differential waveform   |        | 60  | 150     | ps       | 1     |

<sup>1</sup>Guaranteed by design, not 100% tested in production.

<sup>2</sup> All Long Term Accuracy and Clock Period specifications are guaranteed with the assumption that Ref output is at 14.31818MHz

**Electrical Characteristics - PCICLK**

$T_A = 0 - 70^\circ\text{C}$ ;  $V_{DD} = 3.3\text{V} \pm 5\%$ ;  $C_L = 10\text{-}30\text{ pF}$  (unless otherwise specified)

| PARAMETER            | SYMBOL          | CONDITIONS   | MIN | TYP   | MAX  | UNITS    |
|----------------------|-----------------|--|-----|-------|------|----------|
| Output Frequency     | $F_{O1}$        |  |     | 33.33 |      | MHz      |
| Output Impedance     | $R_{DSP1}^1$    | $V_O = V_{DD} * (0.5)$                                   | 12  | 33    | 55   | $\Omega$ |
| Output High Voltage  | $V_{OH}^1$      | $I_{OH} = -1\text{ mA}$                                  | 2.4 |       |      | V        |
| Output Low Voltage   | $V_{OL}^1$      | $I_{OL} = 1\text{ mA}$                                   |     |       | 0.55 | V        |
| Output High Current  | $I_{OH}^1$      | $V_{OH@MIN} = 1.0\text{ V}, V_{OH@MAX} = 3.135\text{ V}$ | -33 |       | -33  | mA       |
| Output Low Current   | $I_{OL}^1$      | $V_{OL@MIN} = 1.95\text{ V}, V_{OL@MAX} = 0.4\text{ V}$  | 30  |       | 38   | mA       |
| Rise Time            | $t_{r1}^1$      | $V_{OL} = 0.4\text{ V}, V_{OH} = 2.4\text{ V}$           | 0.5 | 1.29  | 2    | ns       |
| Fall Time            | $t_{f1}^1$      | $V_{OH} = 2.4\text{ V}, V_{OL} = 0.4\text{ V}$           | 0.5 | 1.45  | 2    | ns       |
| Duty Cycle           | $d_{t1}^1$      | $V_T = 1.5\text{ V}$                                     | 45  | 51    | 55   | %        |
| Skew                 | $t_{sk1}^1$     | $V_T = 1.5\text{ V}$                                     |     | 190   | 500  | ps       |
| Jitter, cycle to cyc | $t_{jyc-cyc}^1$ | $V_T = 1.5\text{ V}$                                     |     | 124   | 250  | ps       |

<sup>1</sup>Guaranteed by design, not 100% tested in production.

**Electrical Characteristics - 3V66**


$T_A = 0 - 70^\circ\text{C}$ ;  $V_{DD} = 3.3\text{V} \pm 5\%$ ;  $C_L = 10\text{-}30\text{ pF}$  (unless otherwise specified)

| PARAMETER           | SYMBOL          | CONDITIONS   | MIN | TYP   | MAX  | UNITS    |
|---------------------|-----------------|--|-----|-------|------|----------|
| Output Frequency    | $F_{O1}$        |  |     | 66.67 |      | MHz      |
| Output Impedance    | $R_{DSP1}^1$    | $V_O = V_{DD} * (0.5)$                                   | 12  | 33    | 55   | $\Omega$ |
| Output High Voltage | $V_{OH}^1$      | $I_{OH} = -1\text{ mA}$                                  | 2.4 |       |      | V        |
| Output Low Voltage  | $V_{OL}^1$      | $I_{OL} = 1\text{ mA}$                                   |     |       | 0.55 | V        |
| Output High Current | $I_{OH}^1$      | $V_{OH@MIN} = 1.0\text{ V}, V_{OH@MAX} = 3.135\text{ V}$ | -33 |       | -33  | mA       |
| Output Low Current  | $I_{OL}^1$      | $V_{OL@MIN} = 1.95\text{ V}, V_{OL@MAX} = 0.4\text{ V}$  | 30  |       | 38   | mA       |
| Rise Time           | $t_{r1}^1$      | $V_{OL} = 0.4\text{ V}, V_{OH} = 2.4\text{ V}$           | 0.5 | 1.28  | 2    | ns       |
| Fall Time           | $t_{f1}^1$      | $V_{OH} = 2.4\text{ V}, V_{OL} = 0.4\text{ V}$           | 0.5 | 1.36  | 2    | ns       |
| Duty Cycle          | $d_{t1}^1$      | $V_T = 1.5\text{ V}$                                     | 45  | 53.1  | 55   | %        |
| Skew                | $t_{sk1}^1$     | $V_T = 1.5\text{ V}$                                     |     | 90    | 250  | ps       |
| Jitter              | $t_{jyc-cyc}^1$ | $V_T = 1.5\text{ V}$ 3V66                                |     | 128   | 250  | ps       |

<sup>1</sup>Guaranteed by design, not 100% tested in production.

### Un-Buffered Mode 3V66 & PCI Phase Relationship

All 3V66 clocks are to be in pphase with each other. In the case where 3V66\_1 is configured as 48MHz VCH clock, there is no defined phase relationship between 3V66\_1/VCH and other 3V66 clocks. The PCI group should lag 3V66 by the standard skew described below as T<sub>pci</sub>.

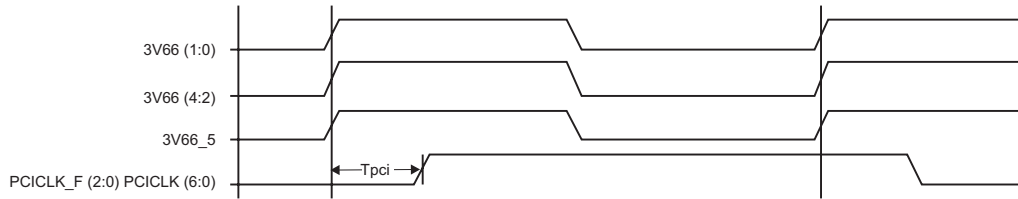

### Group Skews at Common Transition Edges: (Un-Buffered Mode)

| GROUP       | SYMBOL                | CONDITIONS                    | MIN | TYP | MAX | UNITS |
|-------------|-----------------------|-------------------------------|-----|-----|-----|-------|
| 3V66        | 3V66                  | 3V66 pin to pin skew          | 0   |     | 500 | ps    |
| PCI         | PCI                   | PCI_F and PCI pin to pin skew | 0   |     | 500 | ps    |
| 3V66 to PCI | S <sub>3V66-PCI</sub> | 3V66 leads 33MHz PCI          | 1.5 |     | 3.5 | ns    |

<sup>1</sup>Guaranteed by design, not 100% tested in production.


### PD# Functionality

| CPU_STOP# | CPUT        | CPUC   | 3V66  | 66MHz_OUT | PCICLK_F<br>PCICLK | PCICLK   | USB/DOT<br>48MHz |
|-----------|-------------|--------|-------|-----------|--------------------|----------|------------------|
| 1         | Normal      | Normal | 66MHz | 66MHz_IN  | 66MHz_IN           | 66MHz_IN | 48MHz            |
| 0         | iref * Mult | Float  | Low   | Low       | Low                | Low      | Low              |

**PCI\_STOP# - Assertion (transition from logic "1" to logic "0")**

The impact of asserting the PCI\_STOP# signal will be the following. All PCI[6:0] and stoppable PCI\_F[2,0] clocks will latch low in their next high to low transition. The PCI\_STOP# setup time  $t_{SU}$  is 10 ns, for transitions to be recognized by the next rising edge.


**Assertion of PCI\_STOP# Waveforms**

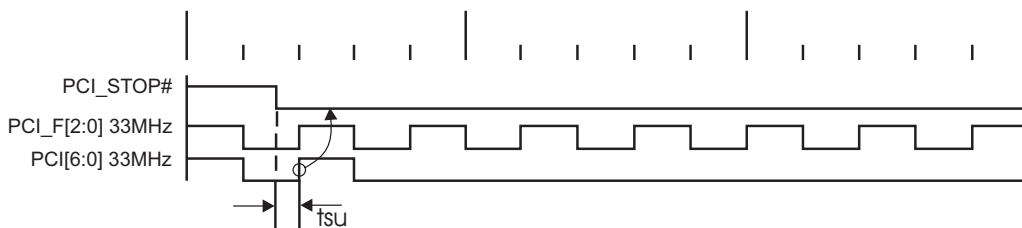

**CPU\_STOP# - Assertion (transition from logic "1" to logic "0")**


The impact of asserting the CPU\_STOP# pin is all CPU outputs that are set in the I<sup>2</sup>C configuration to be stoppable via assertion of CPU\_STOP# are to be stopped after their next transition following the two CPU clock edge sampling as shown. The final state of the stopped CPU signals is CPUT=High and CPUC=Low. There is to be no change to the output drive current values. The CPUT will be driven high with a current value equal to (MULTSEL0) X (I REF), the CPUC signal will not be driven.

**Assertion of CPU\_STOP# Waveforms**

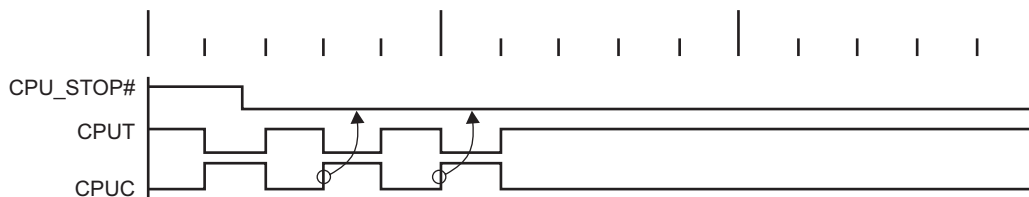

**CPU\_STOP# Functionality**

| CPU_STOP# | CPUT          | CPUC   |
|-----------|---------------|--------|
| 1         | Normal        | Normal |
| 0         | $iref * Mult$ | Float  |

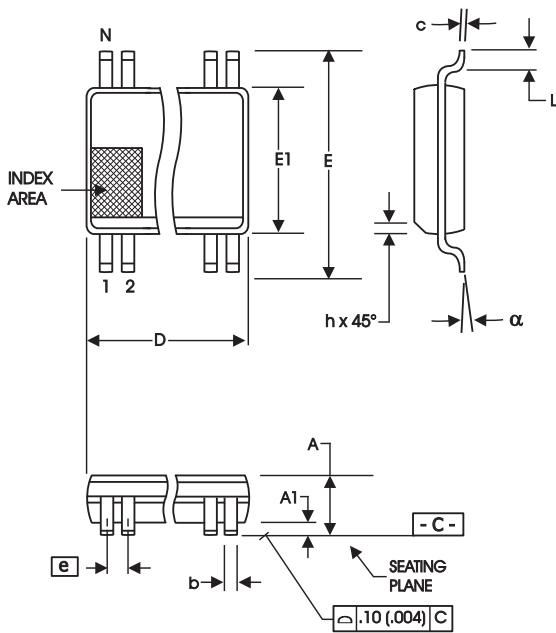

300 mil SSOP Package

| SYMBOL   | In Millimeters<br>COMMON DIMENSIONS |       | In Inches<br>COMMON DIMENSIONS |       |
|----------|-------------------------------------|-------|--------------------------------|-------|
|          | MIN                                 | MAX   | MIN                            | MAX   |
| A        | 2.41                                | 2.80  | .095                           | .110  |
| A1       | 0.20                                | 0.40  | .008                           | .016  |
| b        | 0.20                                | 0.34  | .008                           | .0135 |
| c        | 0.13                                | 0.25  | .005                           | .010  |
| D        | SEE VARIATIONS                      |       | SEE VARIATIONS                 |       |
| E        | 10.03                               | 10.68 | .395                           | .420  |
| E1       | 7.40                                | 7.60  | .291                           | .299  |
| e        | 0.635 BASIC                         |       | 0.025 BASIC                    |       |
| h        | 0.38                                | 0.64  | .015                           | .025  |
| L        | 0.50                                | 1.02  | .020                           | .040  |
| N        | SEE VARIATIONS                      |       | SEE VARIATIONS                 |       |
| $\alpha$ | 0°                                  | 8°    | 0°                             | 8°    |

| VARIATIONS |       |       |          |      |
|------------|-------|-------|----------|------|
| N          | D mm. |       | D (inch) |      |
|            | MIN   | MAX   | MIN      | MAX  |
| 56         | 18.31 | 18.55 | .720     | .730 |

Reference Doc.: JEDEC Publication 95, MO-118


10-0034


## Ordering Information

950201yFLF-T

Example:

XXXX y F LF-T

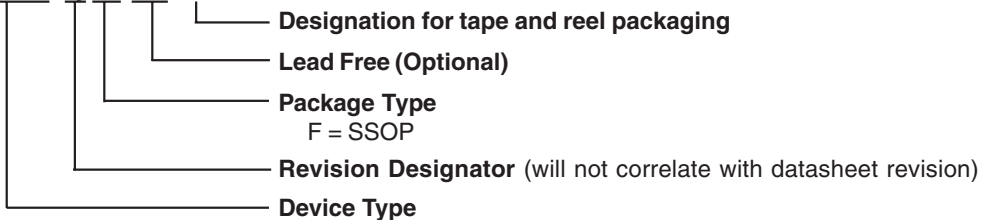

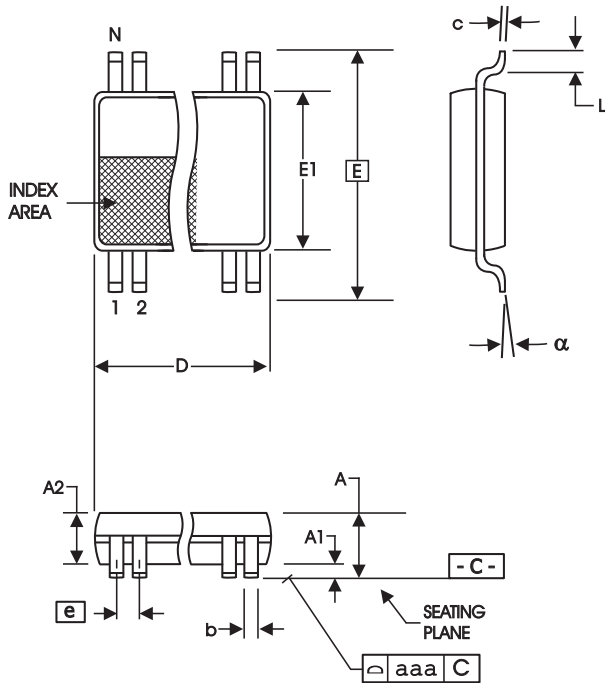

6.10 mm. Body, 0.50 mm. pitch TSSOP  
 (240 mil) (0.020 mil)

| SYMBOL | In Millimeters    |                   | In Inches         |                   |
|--------|-------------------|-------------------|-------------------|-------------------|
|        | COMMON DIMENSIONS | COMMON DIMENSIONS | COMMON DIMENSIONS | COMMON DIMENSIONS |
| A      | --                | 1.20              | --                | .047              |
| A1     | 0.05              | 0.15              | .002              | .006              |
| A2     | 0.80              | 1.05              | .032              | .041              |
| b      | 0.17              | 0.27              | .007              | .011              |
| c      | 0.09              | 0.20              | .0035             | .008              |
| D      | SEE VARIATIONS    |                   | SEE VARIATIONS    |                   |
| E      | 8.10 BASIC        |                   | 0.319 BASIC       |                   |
| E1     | 6.00              | 6.20              | .236              | .244              |
| e      | 0.50 BASIC        |                   | 0.020 BASIC       |                   |
| L      | 0.45              | 0.75              | .018              | .030              |
| N      | SEE VARIATIONS    |                   | SEE VARIATIONS    |                   |
| alpha  | 0°                | 8°                | 0°                | 8°                |
| aaa    | --                | 0.10              | --                | .004              |

VARIATIONS

| N  | D mm. |       | D (inch) |      |
|----|-------|-------|----------|------|
|    | MIN   | MAX   | MIN      | MAX  |
| 56 | 13.90 | 14.10 | .547     | .555 |


Reference Doc.: JEDEC Publication 95, MO-153  
 10-0039

## Ordering Information

950201yGLF-T

Example:

XXXX y G LF-T

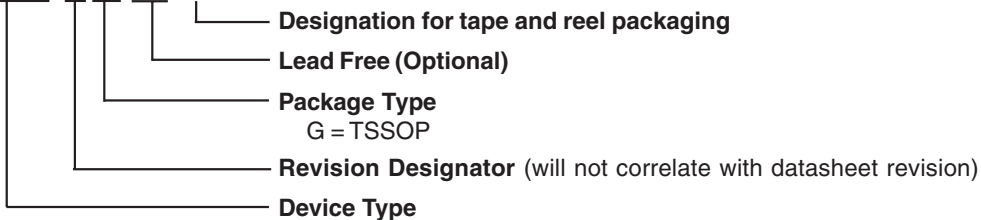

**Revision History**

| <b>Rev.</b> | <b>Issue Date</b> | <b>Description</b>        | <b>Page #</b> |
|-------------|-------------------|---------------------------|---------------|
| J           | 1/25/2010         | Updated document template |               |
|             |                   |                           |               |
|             |                   |                           |               |
|             |                   |                           |               |
|             |                   |                           |               |

---

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.