

## CJ6206 Series


### ■ INTRODUCTION

The CJ6206 series are a group of positive voltage regulators manufactured by CMOS technologies with high ripple rejection, low power consumption and low dropout voltage, which can prolong battery life in portable electronics. The CJ6206 series work with low-ESR ceramic capacitors, reducing the amount of board space necessary for power applications. The CJ6206 series consume less than 0.1uA in shutdown mode and have fast turn-on time less than 50us. The series are very suitable for the battery-powered equipments, such as RF applications and other systems requiring a quiet voltage source.

### ■ APPLICATIONS

- Cellular and Smart Phones
- Laptop, Palmtops and PDA
- Digital Still and Video Cameras

### ■ BLOCK DIAGRAM

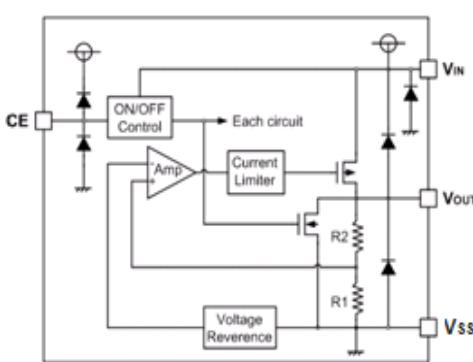

### ■ FEATURES

- Low Dropout Voltage: 150mV@150mA
- Low Quiescent Current: 5μA
- High Ripple Rejection: 65dB@1kHz
- Excellent Line and Load Transient Response
- Operating Voltage: 2.0V~7.0V
- Output Voltage: 1.2 ~ 5.0V
- High Accuracy: ±2% (Typ.)
- Built-in Current Limiter, Short-Circuit Protection
- TTL- Logic-Controlled Shutdown Input

- MP3, MP4 Player
- Radio control systems
- Battery-Powered Equipment


### ■ ORDER INFORMATION

**CJ6206 ①②③④**

DESIGNATOR	SYMBOL	DESCRIPTION
①	A	Standard
	B	With Shutdown Function
②③	Integer	Output Voltage e.g.1.8V=②:1, ③:8
	N	Package:SOT-23
	M	Package:SOT-23-3L/5L
	P/PT	Package:SOT-89-3L
④	F	Package:DFNWB1x1-4L

## Pin Configuration

(Top view)

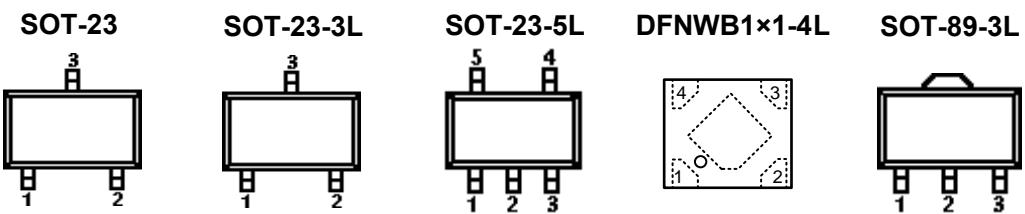

PIN NUMBER				PIN NAME	FUNCTION
SOT-23	SOT-23-3L	SOT-89-3L			
N	M	P	PT		
1	1	1	2	V <sub>SS</sub>	Ground
2	2	3	1	V <sub>OUT</sub>	Output
3	3	2	3	V <sub>IN</sub>	Power input

### SOT-23-5L

PIN NUMBER		SYMBOL	FUNCTION
1		V <sub>IN</sub>	Power Input Pin
2		V <sub>SS</sub>	Ground
3		CE	Chip Enable Pin
4		NC	No Connection
5		V <sub>OUT</sub>	Output Pin

### DFNWB1x1-4L

PIN NUMBER		SYMBOL	FUNCTION
F			
1		V <sub>OUT</sub>	Output Pin
2		V <sub>SS</sub>	Ground
3		CE	Chip Enable Pin
4		V <sub>IN</sub>	Power Input Pin

## Electrical Characteristics

### ■ ABSOLUTE MAXIMUM RATINGS

(Unless otherwise specified, Ta=25°C)

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		$V_{IN}$	$V_{SS} - 0.3 \text{~V}_{SS} + 8$	V
Output Current		$I_{OUT}$	600	mA
Output Voltage		$V_{OUT}$	$V_{SS} - 0.3 \text{~V}_{IN} + 0.3$	V
Power Dissipation	SOT-23	Pd	0.3	W
	SOT-23-3L/SOT-23-5L		0.4	W
	DFNWB1x1-4L		0.3	W
	SOT-89-3L		0.6	W
Operating Ambient Temperature		$T_A$	-40~+85	°C
Operating Junction Temperature		$T_j$	-40~+125	°C
Storage Temperature		$T_{stg}$	-40~+125	°C
Soldering Temperature & Time		$T_{solder}$	260°C, 10s	

### ■ ELECTRICAL CHARACTERISTICS



( $V_{IN} = V_{OUT} + 1V$ ,  $C_{IN} = C_{OUT} = 1\mu F$ , Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT} = 1\text{mA}$	$V_{OUT}$ *0.98	$V_{OUT}$	$V_{OUT}$ *1.02	V
Supply Current	$I_{SS}$	$I_{OUT} = 0$		5	10	$\mu A$
Standby Current	$I_{STBY}$	$CE = V_{SS}$			0.1	$\mu A$
Output Current	$I_{OUT}$	—	300			mA
Dropout Voltage (Note 3)	$V_{dif}$	$I_{OUT} = 150\text{mA}$ $V_{OUT} \geq 3.0\text{V}$		150		mV
Load Regulation	$\Delta V_{OUT}$	$V_{IN} = V_{OUT} + 1V$ , $1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		10		mV
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta V_{IN}}$	$I_{OUT} = 10\text{mA}$ $V_{OUT} + 1V \leq V_{IN} \leq 6V$		0.01	0.2	%/V
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T \times V_{OUT}}$	$I_{OUT} = 10\text{mA}$ $-40 \leq T \leq +85$		100		ppm
Short Current	$I_{Short}$	$V_{OUT} = V_{SS}$		50		mA
Input Voltage	$V_{IN}$	—	2.0		7.0	V
Power Supply Rejection Rate	1kHz 10kHz	PSRR	$I_{OUT} = 50\text{mA}$	65		dB
CE "High" Voltage	$V_{CE}^H$			50		
CE "Low" Voltage	$V_{CE}^L$				$V_{IN}$	V
					0.3	V

#### NOTE:


1.  $V_{OUT}$ : Specified Output Voltage.
2.  $V_{OUT}(E)$  : Effective Output Voltage ( ie. The Output Voltage When  $V_{IN} = (V_{OUT} + 1.0V)$  And Maintain A Certain  $I_{OUT}$  Value).
3.  $V_{dif}$ : The Difference Of Output Voltage And Input Voltage When Input Voltage Is Decreased Gradually Till Output Voltage Equals To 98% Of  $V_{OUT}(E)$ .

## Typical Characteristics

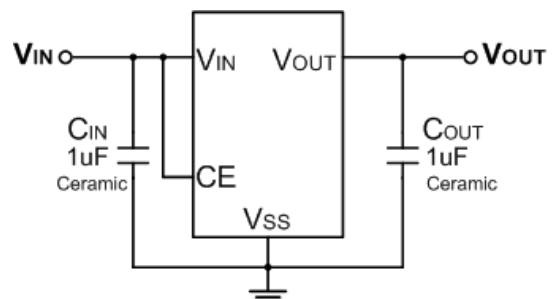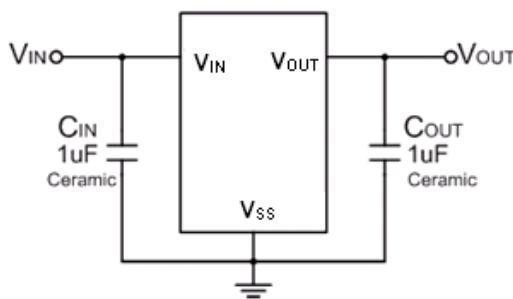


### ■ TYPICAL PERFORMANCE CHARACTERISTICS


Output Voltage vs. Temperature

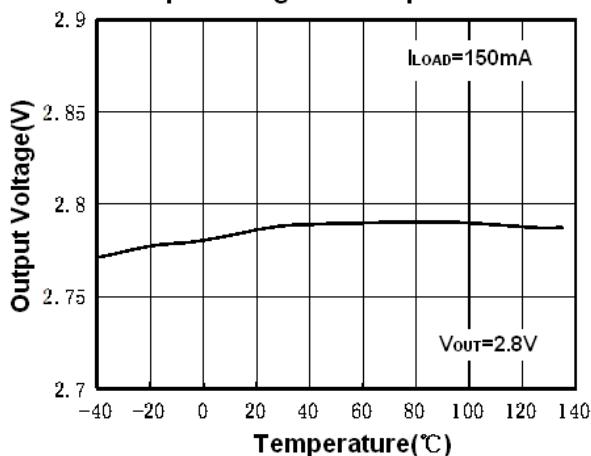


Dropout Voltage vs. Load Current

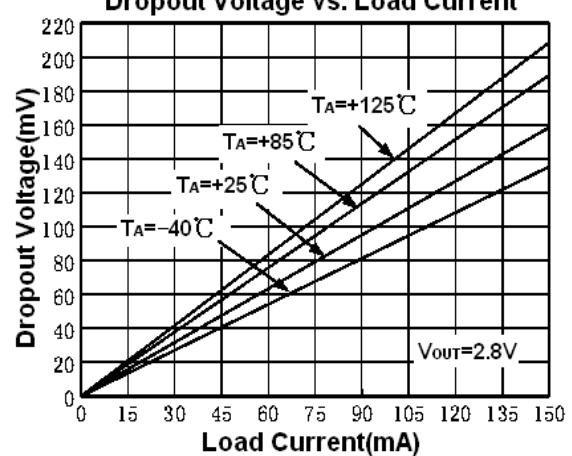





PSRR vs. Frequency

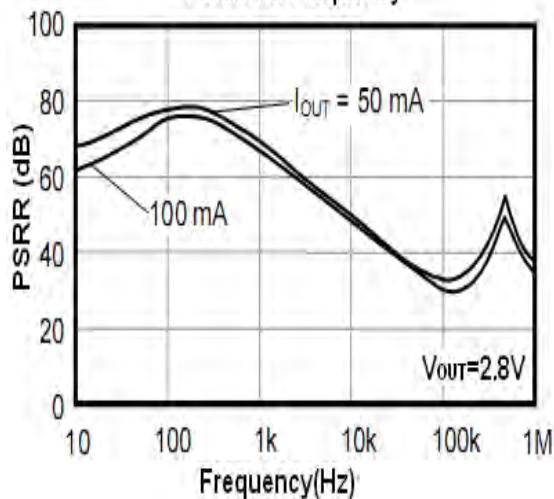



Output Noise 10Hz to 100KHz

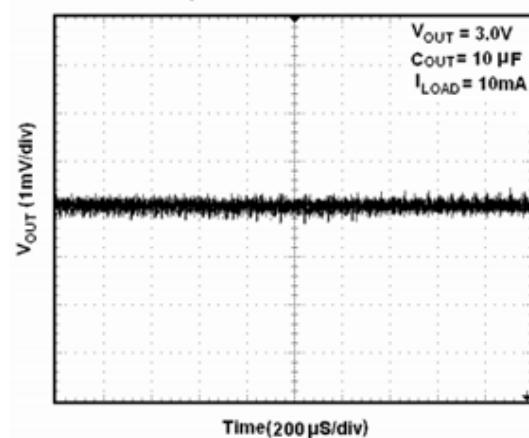

## Typical Characteristics

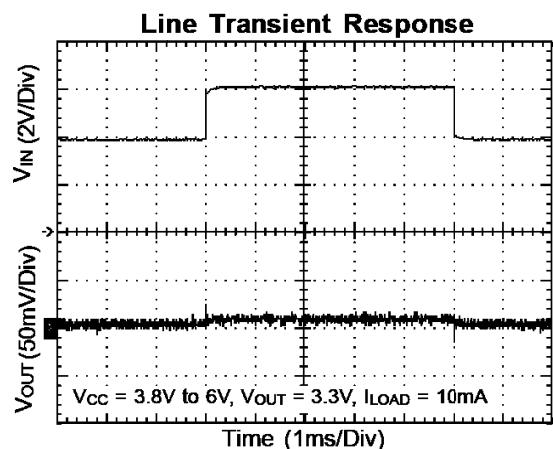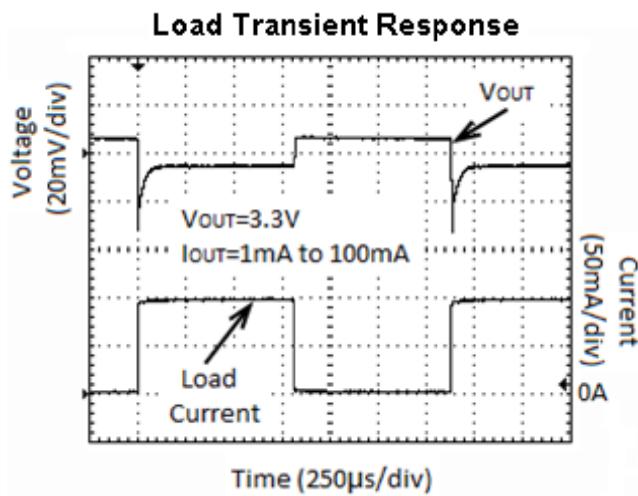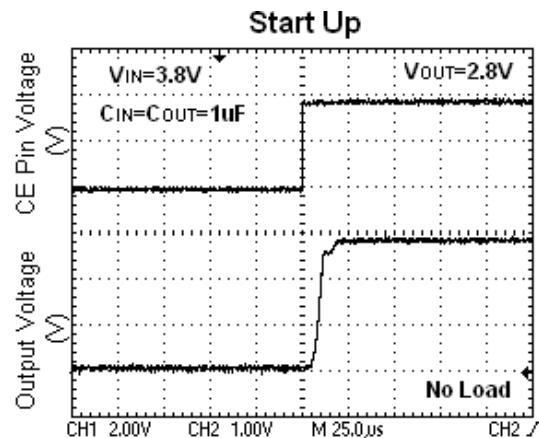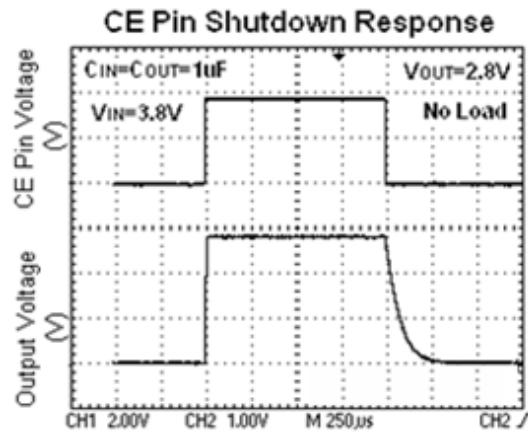


## SOT-23 Package Outline Dimensions

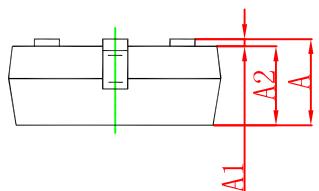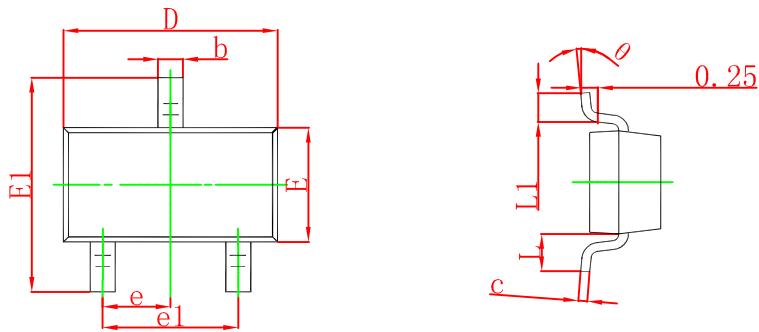

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
theta	0°	8°	0°	8°


## SOT-23 Suggested Pad Layout

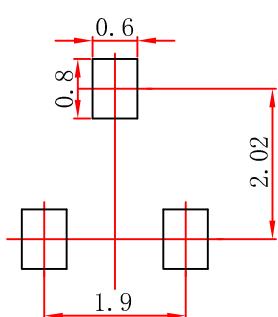

### Note:


- Controlling dimension:in millimeters.
- General tolerance: $\pm 0.05\text{mm}$ .
- The pad layout is for reference purposes only.

## SOT-23-3L Package Outline Dimensions

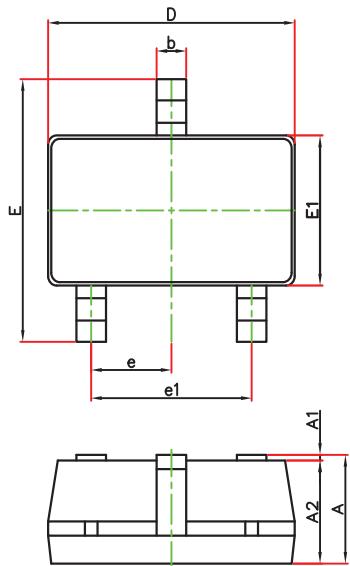

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	2.650	2.950	0.104	0.116
E1	1.500	1.700	0.059	0.067
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
$\theta$	0°	8°	0°	8°


## SOT-23-3L Suggested Pad Layout

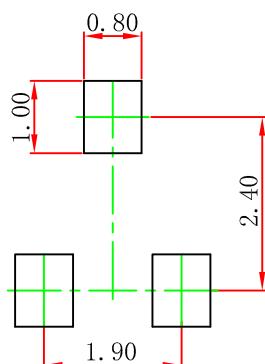

Note:


1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.

## SOT-23-5L Package Outline Dimensions

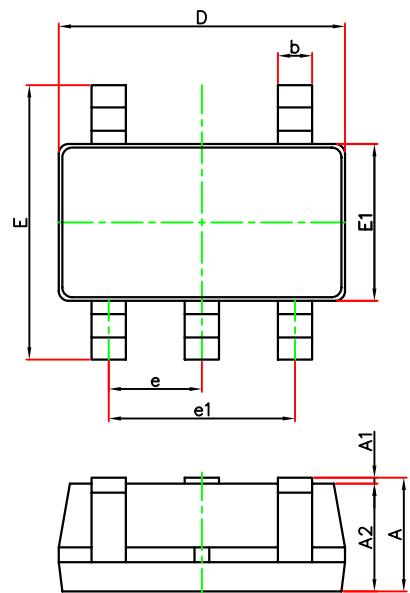

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	2.650	2.950	0.104	0.116
E1	1.500	1.700	0.059	0.067
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

## SOT-23-5L Suggested Pad Layout

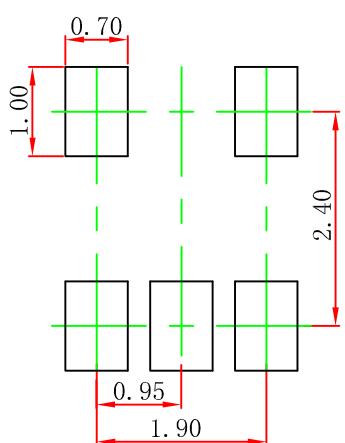


Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

---

## SOT-89-3L Package Outline Dimensions

---

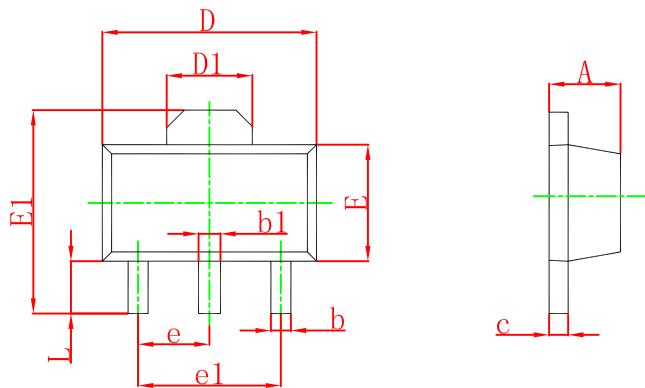


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.197
b <sub>1</sub>	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D <sub>1</sub>	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E <sub>1</sub>	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e <sub>1</sub>	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047

---

## SOT-89-3L Suggested Pad Layout


---

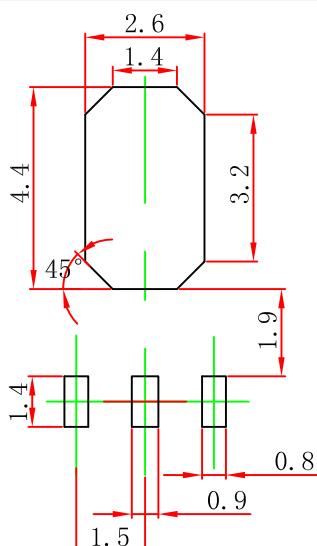

Note:


1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

## DFNWB1\*1-4L Package Outline Dimensions

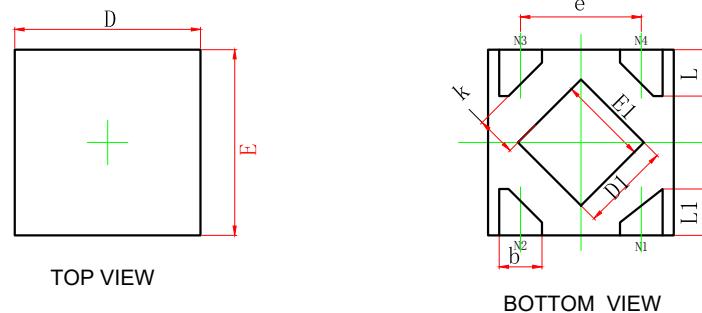

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.320	0.400	0.013	0.016
A1	0.000	0.050	0.000	0.002
A2	0.100 REF.		0.004 REF.	
D	0.950	1.050	0.037	0.041
E	0.950	1.050	0.037	0.041
D1	0.430	0.530	0.017	0.021
E1	0.430	0.530	0.017	0.021
k	0.150MIN.		0.006MIN.	
b	0.180	0.280	0.007	0.011
e	0.650TYP.		0.026TYP.	
L	0.200	0.300	0.008	0.012
L1	0.200	0.300	0.008	0.012

## DFNWB1\*1-4L Suggested Pad Layout

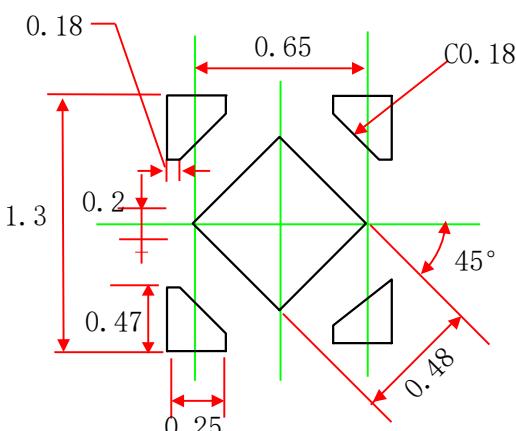

### Note:

- Controlling dimension:in millimeters.
- General tolerance: $\pm 0.05\text{mm}$ .
- The pad layout is for reference purposes only.

### NOTICE

JSCJ reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein.JSCJ does not assume any liability arising out of the application or use of any product described herein.