


Alchip™ **MZA** Series *Upgrade!*

- Endurance : 2,000 to 5,000 hours at 105°C
- Low impedance
- Solvent resistant type(see PRECAUTIONS AND GUIDELINES)
- Vibration resistant structure
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.




◆ **SPECIFICATIONS**

| Items                                                                                                             | Characteristics                                                                                                                                              |                                                      |      |      |      |      |      |      |      |      |      |
|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------|------|------|------|------|------|------|------|------|
| <b>Category</b>                                                                                                   | -55 to +105°C                                                                                                                                                |                                                      |      |      |      |      |      |      |      |      |      |
| <b>Temperature Range</b>                                                                                          | -55 to +105°C                                                                                                                                                |                                                      |      |      |      |      |      |      |      |      |      |
| <b>Rated Voltage Range</b>                                                                                        | 6.3 to 100V <sub>dc</sub>                                                                                                                                    |                                                      |      |      |      |      |      |      |      |      |      |
| <b>Capacitance Tolerance</b>                                                                                      | ±20%(M) (at 20°C, 120Hz)                                                                                                                                     |                                                      |      |      |      |      |      |      |      |      |      |
| <b>Leakage Current</b>                                                                                            | I=0.01CV or 3μA, whichever is greater<br>Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes) |                                                      |      |      |      |      |      |      |      |      |      |
| <b>Dissipation Factor (tan δ)</b>                                                                                 | Rated voltage(V <sub>dc</sub> )                                                                                                                              | 6.3V                                                 | 10V  | 16V  | 25V  | 35V  | 50V  | 63V  | 80V  | 100V |      |
|                                                                                                                   | tan δ(Max.)                                                                                                                                                  | D61 to JA0                                           | 0.26 | 0.19 | 0.16 | 0.14 | 0.12 | 0.10 | 0.08 | 0.08 | —    |
|                                                                                                                   |                                                                                                                                                              | KE0 to MN0                                           | —    | —    | —    | 0.16 | 0.14 | 0.12 | 0.12 | 0.10 | 0.10 |
| When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz) |                                                                                                                                                              |                                                      |      |      |      |      |      |      |      |      |      |
| <b>Low Temperature Characteristics (Max. impedance Ratio)</b>                                                     | Rated voltage(V <sub>dc</sub> )                                                                                                                              | 6.3V                                                 | 10V  | 16V  | 25V  | 35V  | 50V  | 63V  | 80V  | 100V |      |
|                                                                                                                   | Z(-25°C)/Z(+20°C)                                                                                                                                            | 2                                                    | 2    | 2    | 2    | 2    | 2    | 2    | 2    | 2    |      |
|                                                                                                                   | Z(-40°C)/Z(+20°C)                                                                                                                                            | 3                                                    | 3    | 3    | 3    | 3    | 3    | 3    | 3    | 3    |      |
|                                                                                                                   | Z(-55°C)/Z(+20°C)                                                                                                                                            | 4                                                    | 4    | 4    | 3    | 3    | 3    | 3    | 3    | 3    |      |
| (at 120Hz)                                                                                                        |                                                                                                                                                              |                                                      |      |      |      |      |      |      |      |      |      |
| <b>Endurance</b>                                                                                                  | The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for specified time at 105°C.     |                                                      |      |      |      |      |      |      |      |      |      |
|                                                                                                                   | Time                                                                                                                                                         | D61 to JA0 : 2,000 hours<br>KE0 to MN0 : 5,000 hours |      |      |      |      |      |      |      |      |      |
|                                                                                                                   | Capacitance change                                                                                                                                           | ≤ ±30% of the initial value                          |      |      |      |      |      |      |      |      |      |
|                                                                                                                   | D.F. (tan δ)                                                                                                                                                 | ≤ 200% of the initial specified value                |      |      |      |      |      |      |      |      |      |
|                                                                                                                   | Leakage current                                                                                                                                              | ≤ The initial specified value                        |      |      |      |      |      |      |      |      |      |


◆ **DIMENSIONS [mm]**

- Terminal Code : A
- Size code : D61 to MN0

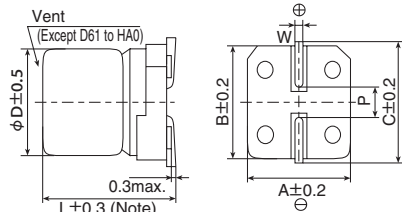

Note : L±0.5 for HA0 to MN0

- Terminal Code : G(Vibration resistant structure)
- Size code : F61 to MN0

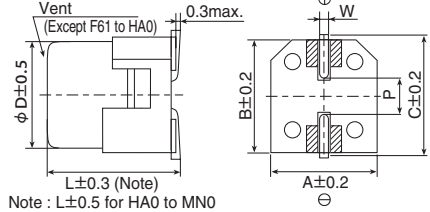


Note : L±0.5 for HA0 to MN0

▨ : Dummy terminals


| Size code | D    | L    | A    | B    | C    | W          | P   |
|-----------|------|------|------|------|------|------------|-----|
| D61       | 4    | 5.8  | 4.3  | 4.3  | 5.1  | 0.5 to 0.8 | 1.0 |
| E61       | 5    | 5.8  | 5.3  | 5.3  | 5.9  | 0.5 to 0.8 | 1.4 |
| F61       | 6.3  | 5.8  | 6.6  | 6.6  | 7.2  | 0.5 to 0.8 | 1.9 |
| F80       | 6.3  | 7.7  | 6.6  | 6.6  | 7.2  | 0.5 to 0.8 | 1.9 |
| HA0       | 8    | 10.0 | 8.3  | 8.3  | 9.0  | 0.7 to 1.1 | 3.1 |
| JA0       | 10   | 10.0 | 10.3 | 10.3 | 11.0 | 0.7 to 1.1 | 4.5 |
| KE0       | 12.5 | 13.5 | 13.0 | 13.0 | 13.7 | 1.0 to 1.3 | 4.2 |
| KG5       | 12.5 | 16.0 | 13.0 | 13.0 | 13.7 | 1.0 to 1.3 | 4.2 |
| LH0       | 16   | 16.5 | 17.0 | 17.0 | 18.0 | 1.0 to 1.3 | 6.5 |
| LN0       | 16   | 21.5 | 17.0 | 17.0 | 18.0 | 1.0 to 1.3 | 6.5 |
| MH0       | 18   | 16.5 | 19.0 | 19.0 | 20.0 | 1.0 to 1.3 | 6.5 |
| MN0       | 18   | 21.5 | 19.0 | 19.0 | 20.0 | 1.0 to 1.3 | 6.5 |

◆ **PART NUMBERING SYSTEM**

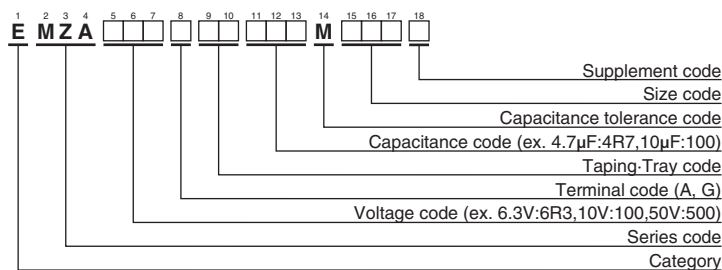

Please refer to "Product code guide (surface mount type)"

◆ **MARKING**

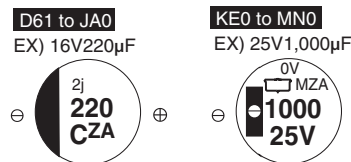

- Rated voltage symbol (D61 to JA0)

| Rated voltage (V <sub>dc</sub> ) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 80 |
|----------------------------------|-----|----|----|----|----|----|----|----|
| Symbol                           | j   | A  | C  | E  | V  | H  | J  | K  |

◆ **STANDARD RATINGS**

| WV (Vdc) | Cap (μF) | Size code | Impedance (Ω max./100kHz) |       | Rated ripple current (mArms/105°C, 100kHz) | Part No.             | WV (Vdc)           | Cap (μF) | Size code | Impedance (Ω max./100kHz) |       | Rated ripple current (mArms/105°C, 100kHz) | Part No.             |
|----------|----------|-----------|---------------------------|-------|--------------------------------------------|----------------------|--------------------|----------|-----------|---------------------------|-------|--------------------------------------------|----------------------|
|          |          |           | 20°C                      | -40°C |                                            |                      |                    |          |           | 20°C                      | -40°C |                                            |                      |
| 6.3      | 22       | D61       | 1.35                      | -     | 90                                         | EMZA6R3ARA220MD61G   | 35                 | 330      | JA0       | 0.08                      | -     | 850                                        | EMZA350 □ RA331MJA0G |
|          | 47       | D61       | 1.35                      | -     | 90                                         | EMZA6R3ARA470MD61G   |                    | 620      | KE0       | 0.060                     | 0.30  | 1,320                                      | EMZA350 □ RA621MKE0S |
|          | 47       | E61       | 0.70                      | -     | 160                                        | EMZA6R3ARA470ME61G   |                    | 820      | KG5       | 0.056                     | 0.28  | 1,470                                      | EMZA350 □ RA821MKG5S |
|          | 100      | E61       | 0.70                      | -     | 160                                        | EMZA6R3ARA101ME61G   |                    | 1,200    | LH0       | 0.047                     | 0.24  | 1,820                                      | EMZA350 □ RA122MLH0S |
|          | 100      | F61       | 0.36                      | -     | 240                                        | EMZA6R3 □ RA101MF61G |                    | 1,600    | MH0       | 0.045                     | 0.23  | 2,060                                      | EMZA350 □ RA162MMH0S |
|          | 220      | F61       | 0.36                      | -     | 240                                        | EMZA6R3 □ RA221MF61G |                    | 1,800    | LNO       | 0.034                     | 0.17  | 2,400                                      | EMZA350 □ RA182MLN0S |
|          | 330      | F80       | 0.34                      | -     | 280                                        | EMZA6R3 □ RA331MF80G |                    | 2,400    | MNO       | 0.032                     | 0.16  | 2,640                                      | EMZA350 □ RA242MMN0S |
|          | 470      | HA0       | 0.16                      | -     | 600                                        | EMZA6R3 □ RA471MHA0G |                    | 4.7      | D61       | 2.9                       | -     | 60                                         | EMZA500ARA4R7MD61G   |
|          | 1,000    | HA0       | 0.16                      | -     | 600                                        | EMZA6R3 □ RA102MHA0G |                    | 10       | E61       | 1.52                      | -     | 85                                         | EMZA500ARA100ME61G   |
|          | 1,500    | JA0       | 0.08                      | -     | 850                                        | EMZA6R3 □ RA152MJA0G |                    | 10       | F61       | 0.88                      | -     | 165                                        | EMZA500 □ RA100MF61G |
| 10       | 22       | D61       | 1.35                      | -     | 90                                         | EMZA100ARA220MD61G   | 22                 | F61      | 0.88      | -                         | 165   | EMZA500 □ RA220MF61G                       |                      |
|          | 33       | D61       | 1.35                      | -     | 90                                         | EMZA100ARA330MD61G   | 33                 | F80      | 0.68      | -                         | 195   | EMZA500 □ RA330MF80G                       |                      |
|          | 33       | E61       | 0.70                      | -     | 160                                        | EMZA100ARA330ME61G   | 47                 | F80      | 0.68      | -                         | 195   | EMZA500 □ RA470MF80G                       |                      |
|          | 220      | F80       | 0.34                      | -     | 280                                        | EMZA100 □ RA221MF80G | 100                | HA0      | 0.34      | -                         | 350   | EMZA500 □ RA101MHA0G                       |                      |
|          | 330      | HA0       | 0.16                      | -     | 600                                        | EMZA100 □ RA331MHA0G | 220                | JA0      | 0.18      | -                         | 670   | EMZA500 □ RA221MJA0G                       |                      |
|          | 470      | HA0       | 0.16                      | -     | 600                                        | EMZA100 □ RA471MHA0G | 330                | KE0      | 0.11      | 0.55                      | 980   | EMZA500 □ RA331MKE0S                       |                      |
|          | 680      | HA0       | 0.16                      | -     | 600                                        | EMZA100 □ RA681MHA0G | 430                | KG5      | 0.10      | 0.50                      | 1,090 | EMZA500 □ RA431MKG5S                       |                      |
|          | 1,000    | JA0       | 0.08                      | -     | 850                                        | EMZA100 □ RA102MJA0G | 620                | LH0      | 0.087     | 0.44                      | 1,320 | EMZA500 □ RA621MLH0S                       |                      |
|          | 16       | 10        | D61                       | 1.35  | -                                          | 90                   | EMZA160ARA100MD61G | 820      | MH0       | 0.087                     | 0.44  | 1,420                                      | EMZA500 □ RA821MMH0S |
|          |          | 22        | D61                       | 1.35  | -                                          | 90                   | EMZA160ARA220MD61G | 1,000    | LNO       | 0.050                     | 0.25  | 1,910                                      | EMZA500 □ RA102MLN0S |
| 22       |          | E61       | 0.70                      | -     | 160                                        | EMZA160ARA220ME61G   | 1,300              | MNO      | 0.050     | 0.25                      | 2,180 | EMZA500 □ RA132MMN0S                       |                      |
| 47       |          | E61       | 0.70                      | -     | 160                                        | EMZA160ARA470ME61G   | 4.7                | E61      | 4.8       | -                         | 50    | EMZA630ARA4R7ME61G                         |                      |
| 47       |          | F61       | 0.36                      | -     | 240                                        | EMZA160 □ RA470MF61G | 10                 | F61      | 2.2       | -                         | 80    | EMZA630 □ RA100MF61G                       |                      |
| 100      |          | F61       | 0.36                      | -     | 240                                        | EMZA160 □ RA101MF61G | 22                 | F80      | 2.1       | -                         | 120   | EMZA630 □ RA220MF80G                       |                      |
| 220      |          | F80       | 0.34                      | -     | 280                                        | EMZA160 □ RA221MF80G | 33                 | HA0      | 0.70      | -                         | 250   | EMZA630 □ RA330MHA0G                       |                      |
| 330      |          | HA0       | 0.16                      | -     | 600                                        | EMZA160 □ RA331MHA0G | 47                 | HA0      | 0.70      | -                         | 250   | EMZA630 □ RA470MHA0G                       |                      |
| 470      |          | HA0       | 0.16                      | -     | 600                                        | EMZA160 □ RA471MHA0G | 68                 | HA0      | 0.70      | -                         | 250   | EMZA630 □ RA680MHA0G                       |                      |
| 680      |          | JA0       | 0.08                      | -     | 850                                        | EMZA160 □ RA681MJA0G | 100                | JA0      | 0.45      | -                         | 400   | EMZA630 □ RA101MJA0G                       |                      |
| 25       | 10       | D61       | 1.35                      | -     | 90                                         | EMZA250ARA100MD61G   | 240                | KE0      | 0.19      | 1.54                      | 880   | EMZA630 □ RA241MKE0S                       |                      |
|          | 22       | E61       | 0.70                      | -     | 160                                        | EMZA250ARA220ME61G   | 300                | KG5      | 0.17      | 1.19                      | 1,000 | EMZA630 □ RA301MKG5S                       |                      |
|          | 33       | E61       | 0.70                      | -     | 160                                        | EMZA250ARA330ME61G   | 430                | LH0      | 0.15      | 1.05                      | 1,220 | EMZA630 □ RA431MLH0S                       |                      |
|          | 33       | F61       | 0.36                      | -     | 240                                        | EMZA250 □ RA330MF61G | 560                | MH0      | 0.12      | 0.84                      | 1,430 | EMZA630 □ RA561MMH0S                       |                      |
|          | 47       | F61       | 0.36                      | -     | 240                                        | EMZA250 □ RA470MF61G | 680                | LNO      | 0.085     | 0.58                      | 1,790 | EMZA630 □ RA681MLN0S                       |                      |
|          | 100      | F80       | 0.34                      | -     | 280                                        | EMZA250 □ RA101MF80G | 910                | MNO      | 0.070     | 0.49                      | 1,960 | EMZA630 □ RA911MMN0S                       |                      |
|          | 220      | HA0       | 0.16                      | -     | 600                                        | EMZA250 □ RA221MHA0G | 3.3                | E61      | 5.0       | -                         | 25    | EMZA800ARA3R3ME61G                         |                      |
|          | 330      | HA0       | 0.16                      | -     | 600                                        | EMZA250 □ RA331MHA0G | 4.7                | F61      | 3.0       | -                         | 40    | EMZA800 □ RA4R7MF61G                       |                      |
|          | 470      | JA0       | 0.08                      | -     | 850                                        | EMZA250 □ RA471MJA0G | 10                 | F80      | 2.4       | -                         | 60    | EMZA800 □ RA100MF80G                       |                      |
|          | 1,000    | KE0       | 0.060                     | 0.30  | 1,320                                      | EMZA250 □ RA102MKE0S | 22                 | HA0      | 1.3       | -                         | 130   | EMZA800 □ RA220MHA0G                       |                      |
| 35       | 1,300    | KG5       | 0.056                     | 0.28  | 1,470                                      | EMZA250 □ RA132MKG5S | 33                 | HA0      | 1.3       | -                         | 130   | EMZA800 □ RA330MHA0G                       |                      |
|          | 1,800    | LH0       | 0.047                     | 0.24  | 1,820                                      | EMZA250 □ RA182MLH0S | 47                 | JA0      | 0.70      | -                         | 200   | EMZA800 □ RA470MJA0G                       |                      |
|          | 2,400    | MH0       | 0.045                     | 0.23  | 2,060                                      | EMZA250 □ RA242MMH0S | 150                | KE0      | 0.22      | 1.54                      | 810   | EMZA800 □ RA151MKE0S                       |                      |
|          | 3,000    | LNO       | 0.034                     | 0.17  | 2,400                                      | EMZA250 □ RA302MLN0S | 220                | KG5      | 0.17      | 1.19                      | 1,000 | EMZA800 □ RA221MKG5S                       |                      |
|          | 3,900    | MNO       | 0.032                     | 0.16  | 2,640                                      | EMZA250 □ RA392MMN0S | 330                | LH0      | 0.15      | 1.05                      | 1,220 | EMZA800 □ RA331MLH0S                       |                      |
|          | 4.7      | D61       | 1.35                      | -     | 90                                         | EMZA350ARA4R7MD61G   | 430                | MH0      | 0.12      | 0.84                      | 1,430 | EMZA800 □ RA431MMH0S                       |                      |
|          | 10       | D61       | 1.35                      | -     | 90                                         | EMZA350ARA100MD61G   | 470                | LNO      | 0.085     | 0.58                      | 1,790 | EMZA800 □ RA471MLN0S                       |                      |
|          | 10       | E61       | 0.70                      | -     | 160                                        | EMZA350ARA100ME61G   | 680                | MNO      | 0.070     | 0.49                      | 1,960 | EMZA800 □ RA681MMN0S                       |                      |
|          | 22       | E61       | 0.70                      | -     | 160                                        | EMZA350ARA220ME61G   | 110                | KE0      | 0.28      | 2.24                      | 740   | EMZA101 □ RA111MKE0S                       |                      |
|          | 33       | F61       | 0.36                      | -     | 240                                        | EMZA350 □ RA330MF61G | 130                | KG5      | 0.21      | 1.68                      | 900   | EMZA101 □ RA131MKG5S                       |                      |
| 35       | 47       | F61       | 0.36                      | -     | 240                                        | EMZA350 □ RA470MF61G | 200                | LH0      | 0.18      | 1.44                      | 1,090 | EMZA101 □ RA201MLH0S                       |                      |
|          | 100      | F80       | 0.34                      | -     | 280                                        | EMZA350 □ RA101MF80G | 270                | MH0      | 0.15      | 1.2                       | 1,280 | EMZA101 □ RA271MMH0S                       |                      |
|          | 100      | HA0       | 0.16                      | -     | 600                                        | EMZA350 □ RA101MHA0G | 330                | LNO      | 0.11      | 0.88                      | 1,580 | EMZA101 □ RA331MLN0S                       |                      |
|          | 220      | HA0       | 0.16                      | -     | 600                                        | EMZA350 □ RA221MHA0G | 430                | MNO      | 0.091     | 0.73                      | 1,690 | EMZA101 □ RA431MMN0S                       |                      |

□ : Enter the appropriate terminal code.

◆ **RATED RIPPLE CURRENT MULTIPLIERS**

● Frequency Multipliers

| Size code  | Capacitance(μF) | Frequency(Hz) |      |      |      |
|------------|-----------------|---------------|------|------|------|
|            |                 | 120           | 1k   | 10k  | 100k |
| D61 to JA0 | 3.3 to 4.7      | 0.35          | 0.70 | 0.90 | 1.00 |
|            | 10 to 100       | 0.40          | 0.75 | 0.90 | 1.00 |
|            | 220 to 470      | 0.50          | 0.85 | 0.94 | 1.00 |
|            | 680 to 1,500    | 0.60          | 0.87 | 0.95 | 1.00 |
| KE0 to MNO | 110 to 200      | 0.40          | 0.75 | 0.90 | 1.00 |
|            | 220 to 620      | 0.50          | 0.85 | 0.94 | 1.00 |
|            | 680 to 1,800    | 0.60          | 0.87 | 0.95 | 1.00 |
|            | 2,400 to 3,000  | 0.75          | 0.90 | 0.95 | 1.00 |
|            | 3,900           | 0.85          | 0.95 | 0.98 | 1.00 |

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.