



# MMBD4448SDW

## Silicon Epitaxial Planar Switching Diode

Fast Switching Diode




1. A1 2. C1 3. AC2  
4. A2 5. C2 6. AC1  
Marking Code: **KB**  
SOT-363 Plastic package

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	$V_{RM}$	100	V
Reverse Voltage	$V_R$	80	V
Average Rectified Forward Current	$I_{F(AV)}$	150	mA
Forward Continuous Current	$I_{FM}$	300	mA
Non-Repetitive Peak Forward Surge Current (at $t = 1 \mu\text{s}$ )	$I_{FSM}$	0.5	A
Power Dissipation	$P_d$	200	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 65 to + 150	$^\circ\text{C}$

### Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Forward Voltage at $I_F = 5 \text{ mA}$ at $I_F = 10 \text{ mA}$ at $I_F = 100 \text{ mA}$ at $I_F = 150 \text{ mA}$	$V_F$	0.62 - - -	0.72 0.855 1 1.25	V
Reverse Leakage Current at $V_R = 80 \text{ V}$ at $V_R = 20 \text{ V}$ at $V_R = 75 \text{ V}, T_J = 150^\circ\text{C}$ at $V_R = 25 \text{ V}, T_J = 150^\circ\text{C}$	$I_R$	- - - -	100 25 50 30	nA nA $\mu\text{A}$ $\mu\text{A}$
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$	$V_{(BR)R}$	80	-	V
Total Capacitance at $V_R = 0.5 \text{ V}, f = 1 \text{ MHz}$	$C_{tot}$	-	4	pF
Reverse Recovery Time at $I_F = I_R = 10 \text{ mA}, I_{rr} = 0.1 \times I_R, R_L = 100 \Omega$	$t_{rr}$	-	4	ns



# MMBD4448SDW

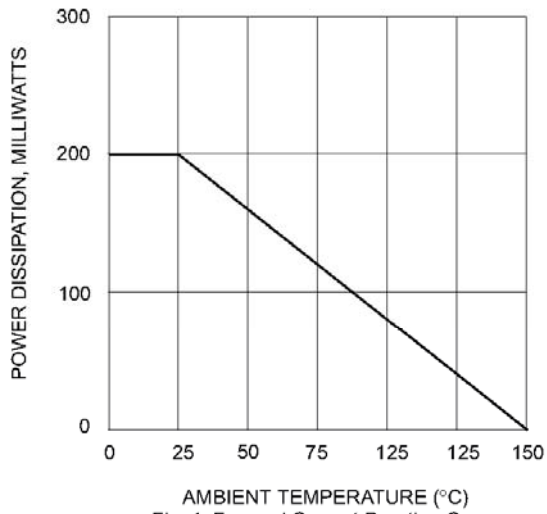


Fig. 1 Forward Current Derating Curve

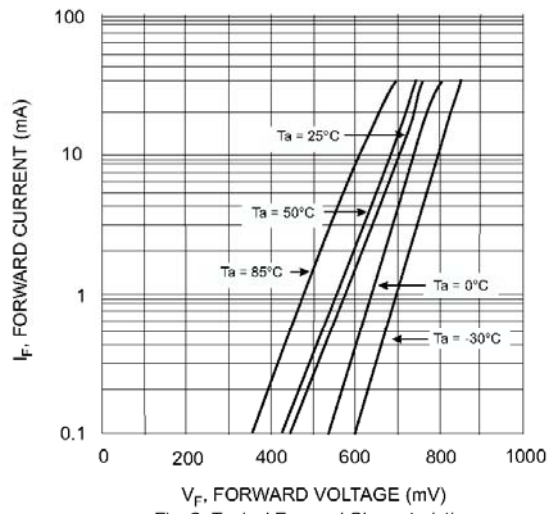


Fig. 2 Typical Forward Characteristics

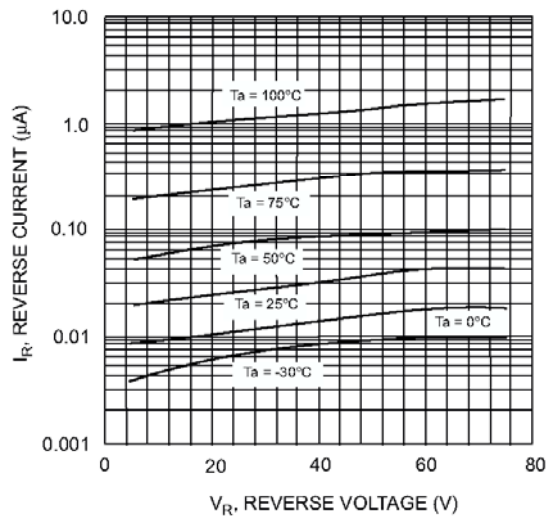


Fig. 3 Typical Reverse Characteristics





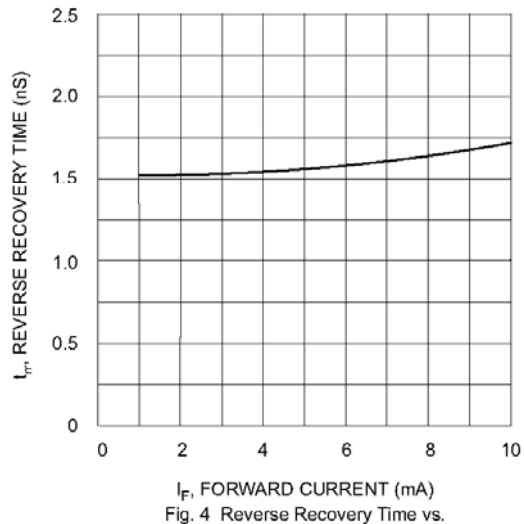


Fig. 4 Reverse Recovery Time vs. Forward Current

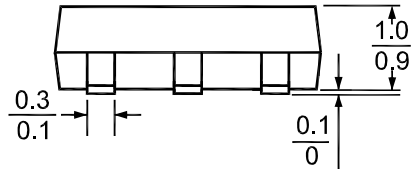


# MMBD4448SDW

## SOT-363 Package Outline Dimensions (Units: mm)

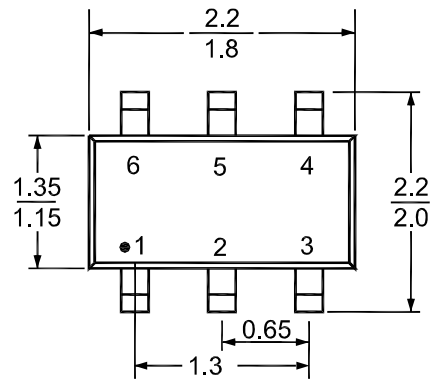

## Recommended Soldering Footprint

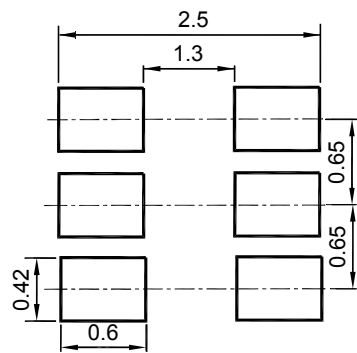

## Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOT-363	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

