

Si3404 Data Sheet

Fully-Integrated IEEE 802.3 Type 1-Compliant POE PD Interface and High-Efficiency Switching Regulator with Compact Footprint

The Si3404 integrates the power management and control functions required in a Power-over-Ethernet (PoE) powered device (PD) application. These devices convert the high voltage supplied over the 10/100/1000BASE-T Ethernet connection to a regulated, low-voltage output supply. The optimized architecture of this device minimizes the solution footprint and external BOM cost and enables the use of low-cost external components while maintaining high performance. The Si3404 integrates a transient surge suppressor. The switching power FET and associated functions are also integrated. The integrated, current mode controlled switching regulator supports isolated or non-isolated flyback and buck converter topologies. The switching frequency for the regulator is tunable with a simple external resistor value to help avoid unwanted harmonics for better emissions control.

This device fully supports the IEEE 802.3at specification for Type 1, single-event classification. Standard external resistors provide the proper IEEE 802.3 signatures for the detection function and programming of the classification mode, and internal startup circuits ensure well-controlled soft-start initial operation of both the hotswap switch and the voltage regulator.

The Si3404 is available in a low-profile, 20-pin, 4 x 4 mm QFN package.

KEY FEATURES

- Type 1 (PoE) power
- IEEE 802.3at Type 1 compliance
- Current mode dc-dc converter
- Tunable switching frequency
- Transformer bias winding support
- Auxiliary adapter capability
- Integrated hotswap FET and switching FET
- 120 V Absolute Max voltage performance
- Extended -40 to +85 °C temperature
- Compact ROHS-compliant 4 mm x 4 mm QFN Package

APPLICATIONS

- Voice over IP telephones
- Wireless access points
- Security and surveillance IP cameras
- Point-of-sale terminals
- Internet appliances
- Network devices

1. Ordering Guide

Table 1.1. Si3404 Ordering Guide

Ordering Part Number	Package	Temperature Range (Ambient)	Applications
Si3404-A-GM	4 x 4 mm 20-QFN Pb-free, RoHS-compliant	–40 to 85 °C Extended	All Purposes

Table of Contents

1. Ordering Guide	2
2. System Overview	4
2.1 Block Diagram	4
2.2 Power over Ethernet (PoE) Line-Side Interface	4
2.2.1 Surge Protection	4
2.2.2 Telephony Protection	4
2.2.3 Detection and Classification	5
2.3 Hotswap Switch	5
2.4 HSSW State Machine	6
2.5 DC-DC Converter	7
2.5.1 Average Current Sensing, Overcurrent, Low-Current Detection, and Output Short Protection	7
2.6 Tunable Oscillator	8
2.7 Regulators	8
2.8 External Wall Adapter Support	8
3. Application Examples	9
4. Electrical Specifications	11
5. Pin Descriptions	15
5.1 Detailed Pin Descriptions	16
6. Packaging	19
6.1 Package Outline: Si3404	19
6.2 Land Pattern: Si3404	21
7. Si3404 Top Marking	23
8. Revision History	24

2.2.3 Detection and Classification

When the Si3404 is connected via Ethernet cable to a PSE-enabled Ethernet switch, it has to provide a characteristic resistance (~25 k Ω) to the PSE in a given voltage range (2.7–10.1 V). This is called detection. After the PSE detects the PD, the PSE increases the voltage above the classification threshold 14.5 V. Then, the PD provides the classification current to inform the PSE about its required power class (Class 1, 2, 3, or 4). Type 1 PSEs cannot provide enough power for a Class 4 PD. Type 2 PSEs have additional voltage steps before switching on the PD. After an initial classification voltage pulse, the Type 2 PSE reduces the voltage below the mark threshold level (10 V) then raises it up again to the Class event range. Last, before switching ON the dc-dc, it reduces the voltage again.

The Si3404 is a Type 1 PD. The following figure represents the typical turning ON procedure of the PD, which includes detection, classification and PD turn ON.

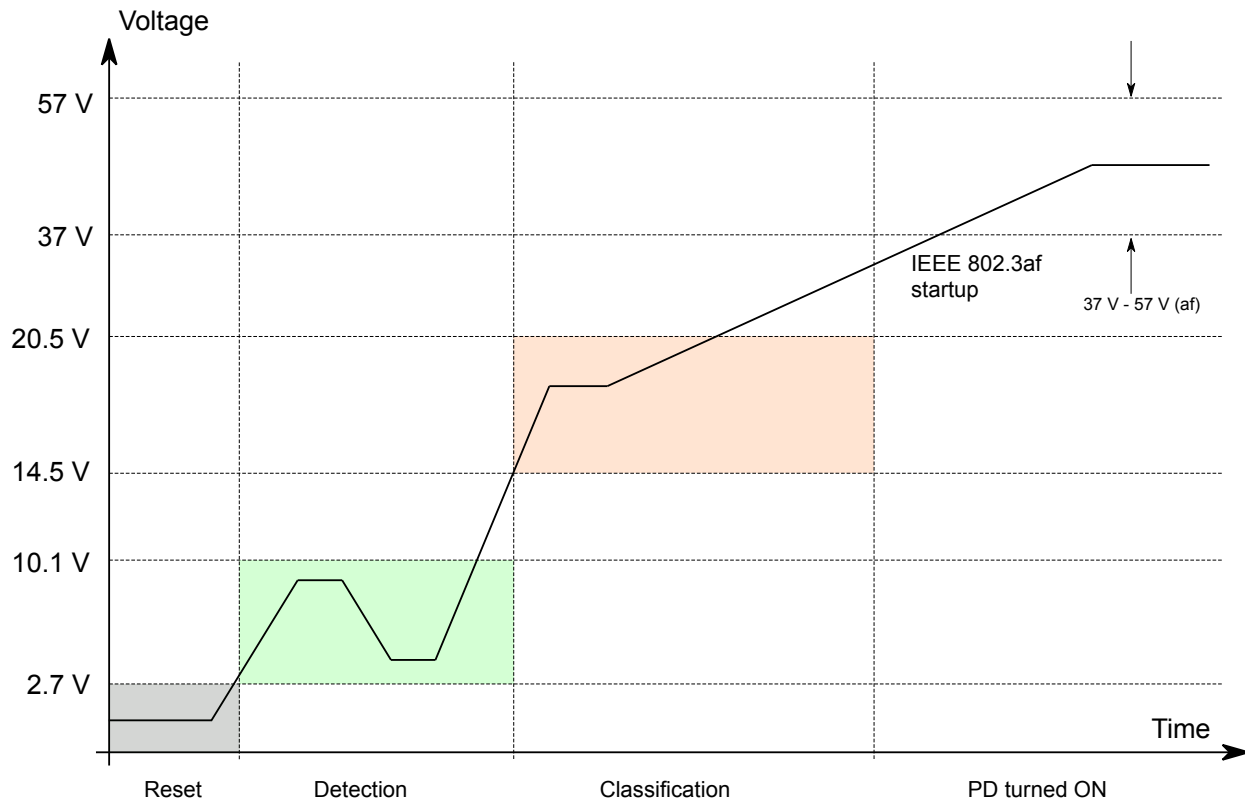


Figure 2.2. Powered Device Voltages

2.3 Hotswap Switch

The hotswap switch is a high voltage switch which separates the PoE interface from the dc-dc converter domain. The internal hotswap switch (HSSW) is turned on (conducting) when the PoE interface voltage goes above V_{UVLO_R} . It provides limited inrush current until the dc-dc side capacitor is charged. The hotswap switch turns off (open) if voltage on the HSSW switch is greater than V_{HSSW_OFF} .

In overload, the hotswap switch goes into current-limiting mode with a current limit of I_{OVL} . It will turn back ON after $T_{WAITHSSW}$ elapses and the dc-dc input capacitor is recharged, meaning the HSO-VNEG voltage is less than V_{HSSW_ON} .

2.4 HSSW State Machine

The HSSW operates as simple 4-state state machine:

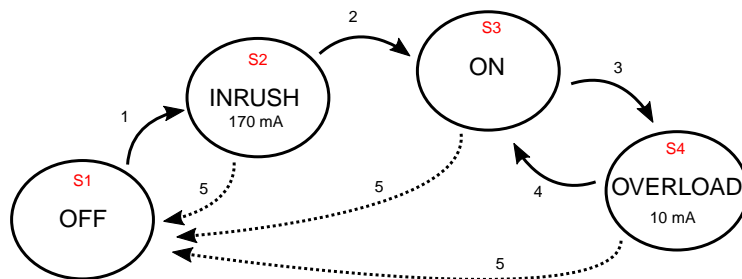


Figure 2.3. Hotswap Switch 4-State Machine

Transitions

1. UVLO released.
2. Input capacitor charged; PWM starts with Soft-Start protection.
3. Overcurrent detected; going to Overload state.
4. Overcurrent not present; going back to ON state.
5. Turning OFF the PD.

OFF State

HSSW turn-on is controlled by UVLO, the undervoltage lockout feature. When UVLO is engaged, the HSSW is OFF. In this state, the HSSW is in idle mode, VNEG and HSO pins are disconnected. In normal operation, a complete detect/classification procedure precedes the HSSW turn-on, and the control of this sequence is implemented in the state machine logic of the chip.

INRUSH State

After the controller enables the HSSW, the block starts operation in the INRUSH state. In this state the switch itself is not directly turned on, but operating in a closed-loop current limit mode to avoid high current peaks during the charging of the input capacitor of the dc-dc converter.

If the V_{HSSW} voltage drops below 380 mV (meaning the bypass cap is 99% charged), the HSSW will change state to ON.

ON State

In ON state, the HSSW switch is completely turned on. The HSSW circuit continuously monitors V_{HSSW} . HSSW will change to OVERLOAD state if V_{HSSW} voltage increases over 3.5 V.

OVERLOAD State

In OVERLOAD state the HSSW operates in closed-loop low current limit mode. If the V_{HSSW} voltage drops below 380 mV again, and the HSSW has been in the OVERLOAD state for at least $T_{WAITHSSW}$, the HSSW will change back to the ON state.

2.6 Tunable Oscillator

The dc-dc frequency can be fixed to 250 kHz or tunable by an external resistor.

The tuning resistor must be connected between the R_{FREQ} pin and VPOS. If R_{FREQ} is shorted to VPOS, the fixed frequency oscillator will provide the clock, F_{OSCINT} , to the dc-dc converter; otherwise, the resistor will determine the frequency as shown in the curve below.

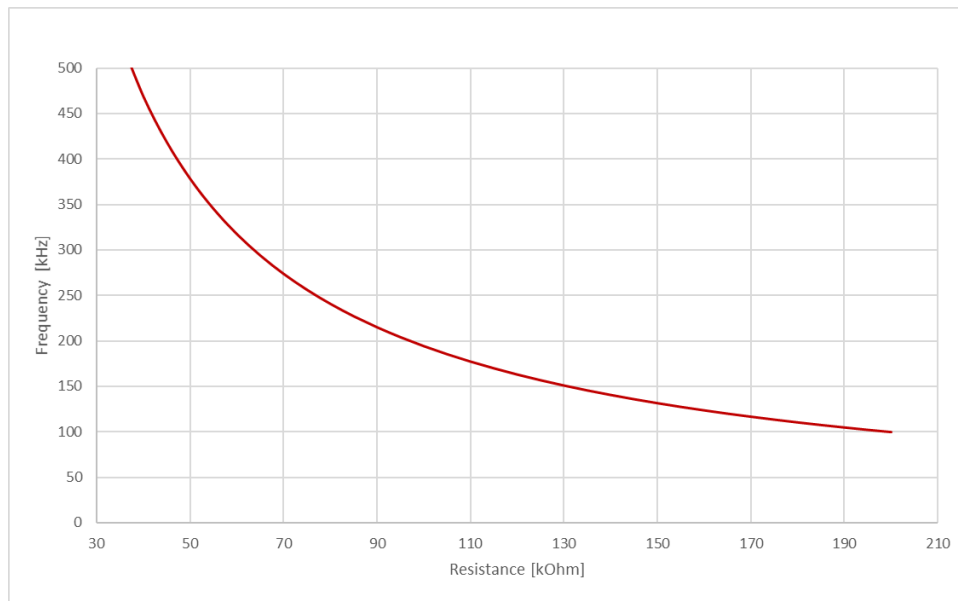


Figure 2.5. R_{FREQ} Frequency Selector Diagram

2.7 Regulators

The chip provides a 5 V output to power LEDs or optocouplers. This is a closed-loop regulator, which ensures accurate output voltage. The 5 V regulator is supplied by an internal 11 V open loop regulator. The 11 V regulator is supplied by a coarse regulator, which is also open-loop. With the Si3404, the VT15 pin can be used to supply this regulator from an optional auxiliary transformer bias winding. The advantage of doing so is additional power saving. The application must be designed to ensure that the absolute maximum rating voltage for the VT15 pin is not exceeded.

2.8 External Wall Adapter Support

The Si3404 allows the use of a range of external wall adapters as a primary or secondary supply. For details on adapter connection, please refer to "AN1130: Using the Si3406/Si34061/Si34062 PoE+ and Si3404 PoE PD Controller In Isolated and Non-Isolated Designs".

3. Application Examples

The following diagrams demonstrate the ease of use and straightforward BOM of the Si3404 Powered Device IC. Detailed reference designs are available in Evaluation KIT User Guides. Also refer to "AN1130: Using the Si3406/Si34061/Si34062 PoE+ and Si3404 PoE PD Controller In Isolated and Non-Isolated Designs".

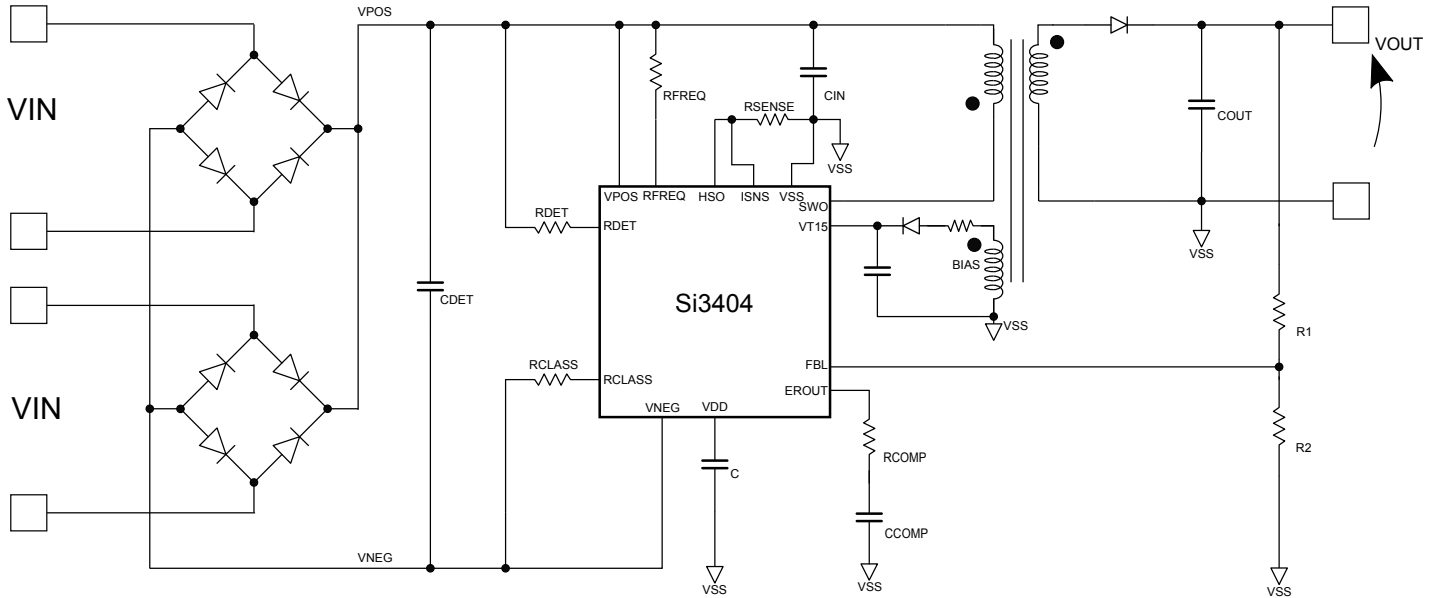


Figure 3.1. Si3404 Non-ISO Flyback Application Diagram

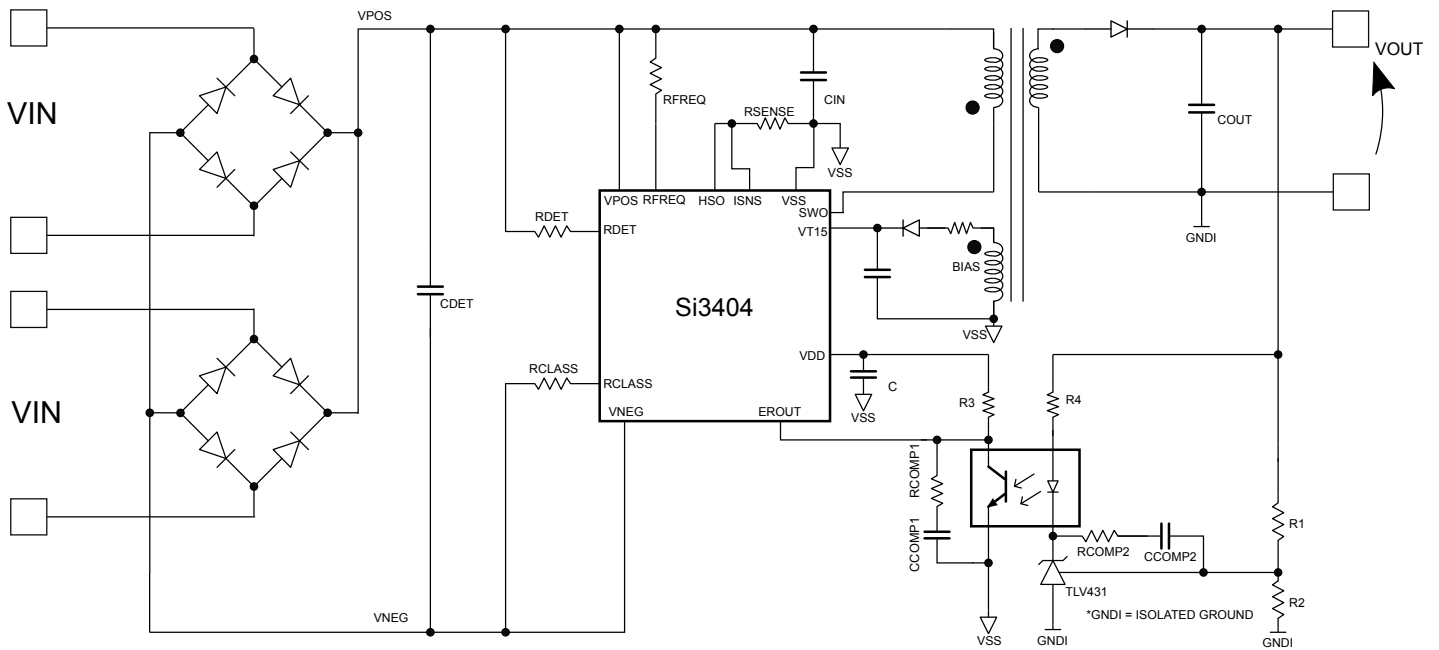


Figure 3.2. Si3404 Isolated Flyback Application Diagram

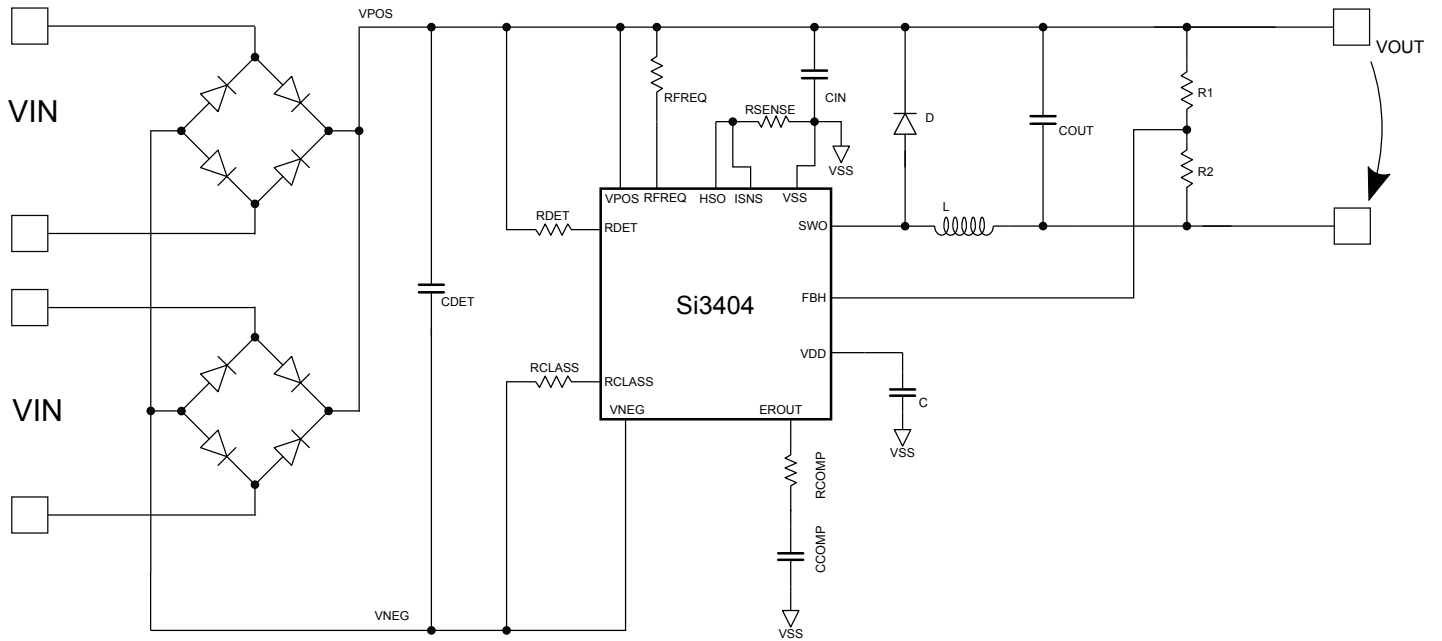


Figure 3.3. Si3404 Buck Application Diagram

4. Electrical Specifications

Table 4.1. Absolute Maximum Ratings¹

Type	Description	Min	Max	Units
Voltage	VNEG-VSS, VPOS- VNEG, HSO ² , RDET ³	-0.7	100	V
	SWO-VSS	-0.7	120	V
	ISNS	-1	1	V
	Low Voltage pins: FBH ³ , EROUT, FBL, RCL ² , RFREQ ³	-0.7	6	V
	Mid Voltage pins: VT15	-0.7	18	V
Peak Current	VPOS ⁴	-5	5	A
Temperature	Storage Temperature	-65	150	°C
	Ambient Operating Temperature	-40	85	

Note:

1. Unless otherwise noted, all voltages referenced to VSS. Permanent device damage may occur if the maximum ratings are exceeded. Functional operation should be restricted to those conditions specified in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may adversely affect device reliability.
2. Voltage referenced to VNEG.
3. Voltage referenced to VPOS.
4. Si340x provides internal protection from certain transient surge voltages on these pins. For more information, refer to "AN1130: Using the Si3406/Si34061/Si34062 PoE+ and Si3404 PoE PD Controller in Isolated and Non-Isolated Designs".

Table 4.2. Recommended Operating Conditions

Symbol	Parameter (Condition)	Min	Typ	Max	Unit
V _{PORT}	V _{PORT} = V _{POS} – V _{NEG}	1.5	—	57	V
V _{HV_OP}	V _{NEG} -V _{SS} , V _{NEG} -H _{SO} , V _{POS} -V _{SS}	1.5	—	57	V
V _{LV_OP}	V _{POS} referred low voltage pins: RFREQ, RDET, FBH	-5.5	—	0	V
V _{LV_OP}	V _{SS} referred low voltage pins: VDD, FBL, ER _{OUT}	0	—	5.5	V
V _{ISNS_OP}	V _{SS} referred current sensing pin: ISNS	-0.5	—	0.5	V
V _{LV_OP}	V _{NEG} referred low voltage pins: RCL	0	—	5.5	V
V _{MV_VT15}	V _{SS} referred medium voltage pin VT15 ¹	12	14.5	16.5	V
I _{AVG}	Allowable continuous current on V _{POS} , SWO, V _{SS} , H _{SO} , V _{NEG}	—	—	600	mA
I _{MAX}	Max current on H _{SO} , V _{NEG} , V _{POS} Max 75 ms 5% Duty Cycle	—	—	683	mA

Note:

- V_{MV_VT15} is relevant for Si3404 only when an external auxiliary bias winding from the primary side of the transformer is being used to improve power conversion efficiency. This can be left undriven, in which case an internal regulator will be used.

Table 4.3. Electrical Characteristics

Symbol	Parameter (Condition)	Min	Typ	Max	Unit
PoE PROTOCOL					
Detection					
V_{DET}	Signature Range (at V_{PORT})	1.5	—	10.1	V
	Signature Resistance (at V_{PORT})	23.75	—	26.25	k Ω
Classification					
V_{RESET}	Classification Reset (at V_{PORT})	0	—	2.81	V
V_{CLASS}	Classification Voltage ON (at V_{PORT})	—	—	14.5	V
	Classification Voltage OFF (at V_{PORT})	20.5	—	—	V
$I_{PortCLASS}$	Class 0 ($R_{CLASS} > 681 \Omega$)	0	—	4	mA
	Class 1 ($R_{CLASS} = 140 \Omega @ 1\%$)	9	—	12	mA
	Class 2 ($R_{CLASS} = 75 \Omega @ 1\%$)	17	—	20	mA
	Class 3 ($R_{CLASS} = 48.7 \Omega @ 1\%$)	26	—	30	mA
Power On and UVLO					
V_{UVLO_R}	Hotswap closed and converter on	34	37	40	V
V_{UVLO_F}	Hotswap open and converter off	30	32	34	V
V_{UVLO_HYST}		3.5	4.5	6	V
Thermal Characteristics					
T_{shd}	Thermal shutdown	—	160	—	$^{\circ}\text{C}$
T_{HYST}	Thermal shutdown hysteresis	—	20	—	$^{\circ}\text{C}$
On-Chip Transient Voltage Suppression/Protection					
V_{PROT}	TVS protection activation voltage (V_{POS} - V_{NEG})	100	—	—	V
Hotswap Switch					
I_{inrush}	Inrush current	100	170	200	mA
$I_{MAXHSSW}$	Maximum continuous operating current	—	—	600	mA
V_{HSSW_ON}	Switch ON voltage	—	380	—	mV
V_{HSSW_OFF}	Switch OFF voltage, HSSW goes to overload cycle	—	3.5	—	V
I_{OVL}	Switch current limit in OVERLOAD State	—	10.5	—	mA
$T_{WAITHSSW}$	Wait time in OVERLOAD	80	96	116	ms
R_{ONHSSW}	Internal hotswap drain-source resistance while ON	0.65	1.5	2.9	Ω
DC-DC					

Symbol	Parameter (Condition)	Min	Typ	Max	Unit
I _{SWOPEAK}	Peak current limit of internal FET (SWO pin)	2.1	—	2.7	A
F _{OSCINT}	Using internal Oscillator	215	250	290	kHz
F _{OSCEXT}	Using external Oscillator, RFREQ = 215 kΩ	75	95	115	kHz
	Using external Oscillator, RFREQ = 39 kΩ	420	470	520	kHz
DUC	Output duty cycle of PWM	—	—	75	%
V _{FBREF}	FBH (referenced to VPOS) and FBL (referenced to VSS) reference voltage	1.28	1.32	1.36	V
V _{EROUT}	Operating voltage range of error input	1	—	4	V
T _{HICCUP}	Output short protection if EROUT is max	—	1	—	ms
V _{ISNS_OVC}	Overcurrent limit voltage on ISNS (ref. to VSS)	−305	−270	−255	mV
T _{SOFTSTART}	Startup time ¹	—	15	—	ms
R _{ONDCCDC}	Internal dc-dc switching FET drain-source resistance while ON	—	0.9	1.2	Ω
Regulators					
VT15	Override internal regulator with transformer winding	12.5	—	16.5	V
VDD	5 V regulated output	4.9	5.2	5.5	V
VDD _{ILIM}	dc current limit of VDD	9.7	11.2	—	mA
C _{REG}	Filter capacitor on VDD	82	100	220	nF
Power Dissipation					
P _{INTMAX}	dc-dc max power internal FET	—	0.5	0.9	W
I _{PortOP}	Operating current (V _{PORT} 57 V; 250 kHz)	—	3	5	mA
Package Thermal Characteristics					
θ _{JA-EFF}	QFN20 ²	—	46.8	—	C°/W
Note:					
1. Depends on output load.					
2. Assumes 4-Layer PCB with adequate layout.					

5. Pin Descriptions

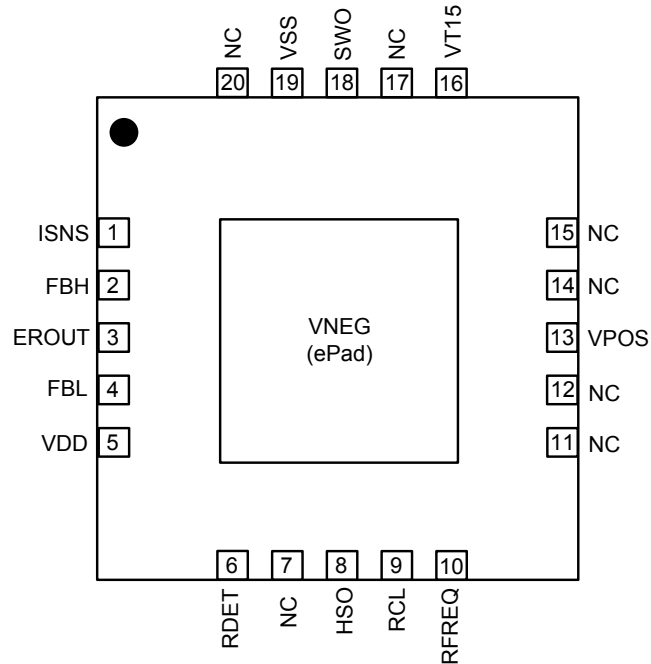


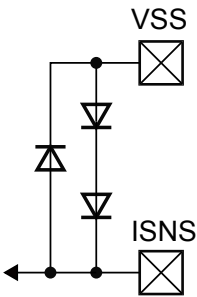
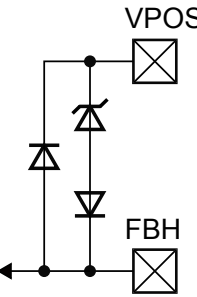
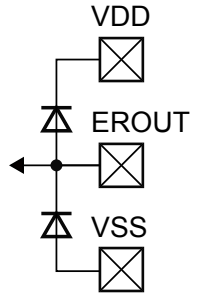
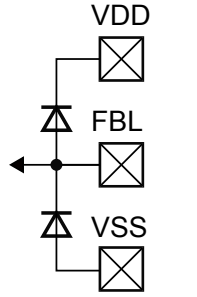
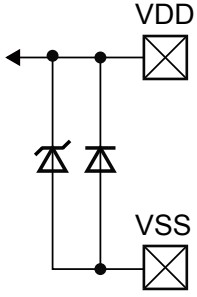
Figure 5.1. Si3404 Pinout

Table 5.1. Pin Descriptions

Si3404 Pins	Name	Ref	Dir.	Vrange	Description
1	ISNS	VSS	I	-0.5 to 0	Chip current sense resistor input
2	FBH	VPOS	I	0–5.5	High side (VPOS referred) dc-dc feedback (Buck converter)
3	EROUT	VSS	IO	0–5.5	Error amplifier current output, compensation impedance input
4	FBL	VSS	I	0–5.5	Low side (VSS referenced) dc-dc feedback (Flyback converter)
5	VDD	VSS	O	0–5.5	5 V regulator output
6	RDET	VPOS	IO	0–100	Detection resistor
8	HSO	VNEG	IO	0–100	Hotswap switch output
9	RCL	VNEG	IO	0–5.5	Classification resistor
10	RFREQ	VPOS	IO	0–5.5	Oscillator frequency tuning resistor, tie to VPOS to select default frequency
13	VPOS	—	IO	0–100	Rectified high-voltage supply positive rail
16	VT15	VSS	I	0–16.5	dc-dc transformer auxiliary winding input
18	SWO	VSS	O	0–120	Internal dc-dc switch output (NMOS drain)
19	VSS	—	IO	0	dc-dc converter primary ground
ePad	VNEG	—	IO	0	Rectified high voltage supply ground
7, 11, 12, 14, 15, 17, 20	NC	—	—	—	Connect to VNEG for better thermal performance

5.1 Detailed Pin Descriptions

Table 5.2. Circuit Equivalent and Description of Die Pads

Pin Name	Detailed Description	Circuit Detail
ISNS	Average current sense resistor input. The resistor value will set the maximum allowed current for the application. The overcurrent threshold voltage V_{ISNS_OVC} . Note that this pin voltage goes below VSS.	
FBH	High side dc-dc feedback input. Need to be tied to VPOS when not used. See VFBREF.	
EROUT	dc-dc converter error output; current out, voltage sense. Loop compensating impedance should be connected here. $I_{EROUT} = (V_{FBH} - V_{FBREF}) \times 50 \mu A$ or $I_{EROUT} = (V_{FBL} - V_{FBREF}) \times 50 \mu A$	
FBL	Low side dc-dc feedback input. Need to be tied to VSS when not used. See VFBREF	
VDD	Regulated 5 V relative to VSS. There is no foldback characteristic, reaching VDD_{ILIM} the output voltage decreases. The regulator needs C_{REG} external capacitance.	

Pin Name	Detailed Description	Circuit Detail
RCL	Classification resistor input. For class 0 this pin can be left floating. Pin is active only at time of classification.	<p>The diagram shows a current source labeled I_{CLASS} connected to a resistor R_{CL}. A diode labeled V_{NEG} is connected in parallel with R_{CL}. An external resistor R_{EXT} is connected in series with R_{CL}.</p>
RFREQ	Used for adjusting the oscillator frequency. The frequency is inversely proportional to the value of the connected resistor.	<p>The diagram shows a current source labeled I_{FREQ} connected to a resistor $RFREQ$. A diode labeled V_{POS} is connected in parallel with $RFREQ$. An external resistor R_{EXT} is connected in series with $RFREQ$.</p>
VPOS, VNEG	Main chip input power. Note that VNEG (the ePad on the bottom of the chip) also provides thermal relief.	<p>The diagram shows a diode connected between the V_{POS} and V_{NEG} pins.</p>
HSO	Hotswap Switch Output. The switch shorts the VNEG and HSO pins, and includes several other functions. See hotswap switch section for details.	<p>The diagram shows a transistor switch controlled by a triangle symbol. The transistor's emitter is connected to V_{NEG} and its collector is connected to the HSO pin. A 120V source is also connected to the HSO pin.</p>
RDET	The user has to tie the RDET resistor between this pin and VPOS. During detection, a high voltage switch pulls down RDET to VNEG. After detection, the reference block uses RDET as absolute chip current reference, forcing -750 mV relative to V_{POS} , creating $30\text{ }\mu\text{A}$ for the internal blocks.	<p>The diagram shows a resistor R_{DET} connected between the R_{DET} pin and V_{POS}. A switch is connected between the R_{DET} pin and V_{NEG}. A 120V source is connected to the R_{DET} pin.</p>

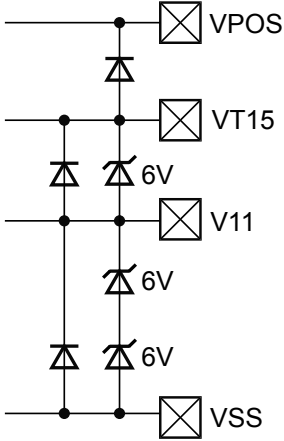
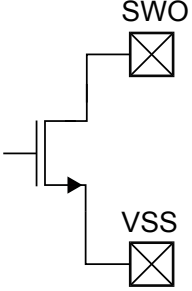
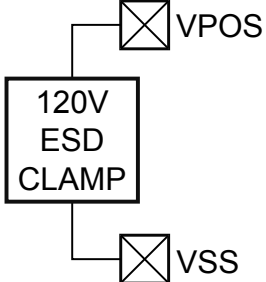
Pin Name	Detailed Description	Circuit Detail
VT15	VT15 is input for an optional 15 V supply generated by an auxiliary transformer bias winding. If the bias winding voltage is lower than VT15_MIN, the internal 15 V coarse regulator will provide the current for the 11 V regulator. V11 is not available on the Si3404 but is included to show internal connections.	
SWO	dc-dc converter switching transistor drain output, $V_{max} = 120\text{ V}$.	
VSS	dc-dc converter ground.	

Table 6.1. Package Diagram Dimensions

Dimension	Min	Nom	Max
A	0.80	0.85	0.90
A1	0.00	0.02	0.05
b	0.18	0.25	0.30
D	4.00 BSC.		
D2	2.55	2.60	2.65
e	0.50 BSC.		
E	4.00 BSC.		
E2	2.50	2.60	2.70
L	0.30	0.40	0.50
aaa	—	—	0.10
bbb	—	—	0.10
ccc	—	—	0.08
ddd	—	—	0.10
eee	—	—	0.10

Note:

1. All dimensions shown are in millimeters (mm) unless otherwise noted.
2. Dimensioning and Tolerancing per ANSI Y14.5M-1994.
3. This drawing conforms to the JEDEC Solid State Outline MO-220, Variation VGGD-8.
4. Recommended card reflow profile is per the JEDEC/IPC J-STD-020C specification for Small Body Components.

6.2 Land Pattern: Si3404

The figure below illustrates the land pattern details for the Si3404. The table lists the values for the dimensions shown in the illustration.

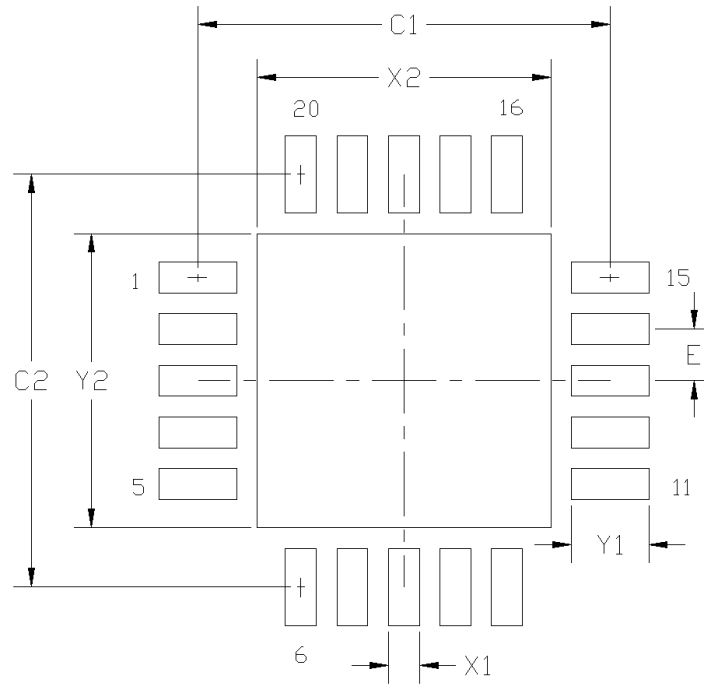


Figure 6.2. 20-Pin, QFN Land Pattern

Table 6.2. Land Pattern Dimensions

Dimension	Min	Max
C1	3.90	4.00
C2	3.90	4.00
E	0.50 BSC	
X1	0.20	0.30
X2	2.55	2.65
Y1	0.65	0.75
Y2	2.55	2.65

Note:**General**

1. All dimensions shown are in millimeters (mm) unless otherwise noted.
2. This land pattern design is based on the IPC-7351 guidelines.

Solder Mask Design

1. All metal pads are to be non-solder mask defined (NSMD). Clearance between the solder mask and the metal pad is to be 60 μm minimum, all the way around the pad.

Stencil Design

1. A stainless steel, laser-cut and electro-polished stencil with trapezoidal walls should be used to assure good solder paste release.
2. The stencil thickness should be 0.125 mm (5 mils).
3. The ratio of stencil aperture to land pad size should be 1:1 for all perimeter pads.
4. A 2x2 array of 1.10 mm x 1.10 mm openings on 1.30 mm pitch should be used for the center ground pad.

Card Assembly

1. A No-Clean, Type-3 solder paste is recommended.
2. The recommended card reflow profile is per the JEDEC/IPC J-STD-020 specification for Small Body Components.

7. Si3404 Top Marking

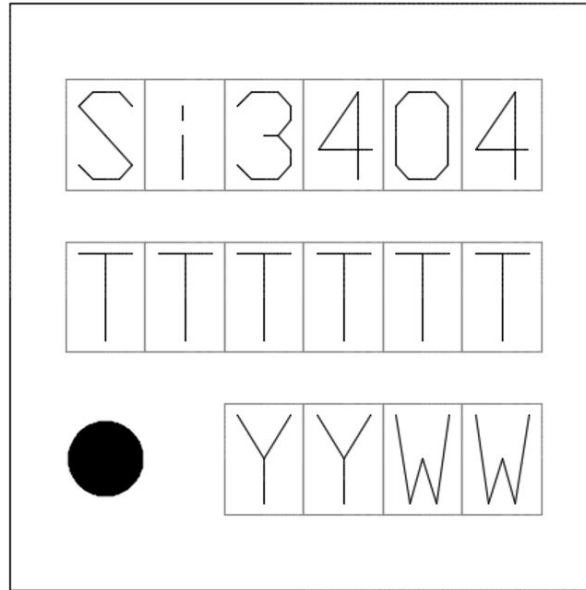


Figure 7.1. Si3404 Top Marking

Table 7.1. Si3404 Top Marking Explanation

Mark Method:	Laser	
Pin 1 Mark:	Circle = 0.50 mm Diameter (Lower-Left Corner)	
Font Size:	0.6 Point (24 mils)	
Line 1 Mark Format:	Device Part Number	Si3404
Line 2 Mark Format:	TTTTTT	Trace code from the Assembly Purchase Order form
Line 3 Mark Format:	YY = Year WW = Work Week	Assembly Year Assembly Week

8. Revision History

Revision 1.1

November, 2018

- Updated [Figure 2.4 Si3404 DC-DC Converter Block Diagram](#) on page 7.
- Updated [Table 6.2 Land Pattern Dimensions](#) on page 22.
 - Updated Solder Mask Design spec.

Revision 1.0

July, 2018

- Updated [Figure 2.2 Powered Device Voltages](#) on page 5.
 - Removed Type 2 signaling from diagram.
- Updated [Figure 2.3 Hotswap Switch 4-State Machine](#) on page 6.
 - Clearer state transition diagram and improved transition descriptions.
- Updated [2.5.1 Average Current Sensing, Overcurrent, Low-Current Detection, and Output Short Protection](#).
 - Added information on output short protection.
- Updated [Table 4.1 Absolute Maximum Ratings¹](#) on page 11.
 - Added min and max current for VPOS.
 - Added note about internal surge protection.
- Updated [Table 4.2 Recommended Operating Conditions](#) on page 12.
 - Added VPOS to I_{AVG} spec; changed I_{PEAK} to I_{MAX}, and removed SWO and VSS from specification.
- Updated [Table 4.3 Electrical Characteristics](#) on page 13.
 - Updated V_{DET} spec to include low threshold and high threshold specs.
 - Updated classification reset max voltage (V_{RESET}) based on final characterization data.
 - Updated classification voltage V_{CLASS} based on final characterization data.
 - Added max and min V_{UVLO_R}, V_{UVLO_F}, and V_{UVLO_HYST} max and min voltages.
 - Removed I_{OVL} max and min current.
 - Added min and max frequency to F_{OSCINT} based on final characterization data.
 - Removed “TBD” from DUC spec.
 - Added max and min V_{FBREF} voltage.
 - Added T_{HICCUP} typical spec.
 - Added max and min V_{ISNS_OVC} voltage.
 - Updated T_{SOFTSTART} time based on application data and added note about dependence on output load.
 - Updated min VT15 based on characterization data.
 - Updated VDD min, typ, and max based on final characterization data.
 - Added VDD_{ILIM} max voltage.
 - Added min and max C_{REG} capacitance.
 - Updated P_{INTMAX} based on final characterization data.
 - Removed P_{MAX} spec.
 - Updated I_{PORTOP} max current based on final characterization data.
- Updated [Table 5.1 Pin Descriptions](#) on page 15.
 - Updated Vrange.
- Updated [Table 5.2 Circuit Equivalent and Description of Die Pads](#) on page 16.
 - Added detail to VT15 pin description.

Revision 0.5

February, 2018

- Updated [2. System Overview](#) and [3. Application Examples](#).
 - Added theory of operation and application content.
- Updated [Table 4.1 Absolute Maximum Ratings¹](#) on page 11, [Table 4.2 Recommended Operating Conditions](#) on page 12, and [Table 4.3 Electrical Characteristics](#) on page 13.
 - Clarified multiple parameters.
- Added [5.1 Detailed Pin Descriptions](#).
- Added [6. Packaging](#) including outline and land pattern.

Revision 0.1

March, 2017

- Initial release.




SKYWORKS®

**Connecting Everyone
and Everything,
All the Time**



Portfolio

www.skyworksinc.com



Quality

www.skyworksinc.com/quality



Support & Resources

www.skyworksinc.com/support

Copyright © 2021 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks' Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of Skyworks' published specifications or parameters.

Skyworks, the Skyworks symbol, Sky5®, SkyOne®, SkyBlue™, Skyworks Green™, Clockbuilder®, DSPLL®, ISOModem®, ProSLIC®, and SiPHY® are trademarks or registered trademarks of Skyworks Solutions, Inc. or its subsidiaries in the United States and other countries. Third-party brands and names are for identification purposes only and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference.

Skyworks Solutions, Inc. | Nasdaq: SWKS | sales@skyworksinc.com | www.skyworksinc.com

USA: 781-376-3000 | Asia: 886-2-2735 0399 | Europe: 33 (0)1 43548540 | [in](https://www.linkedin.com/company/skyworks) [f](https://www.facebook.com/skyworks) [t](https://twitter.com/skyworks) [y](https://www.youtube.com/skyworks)