





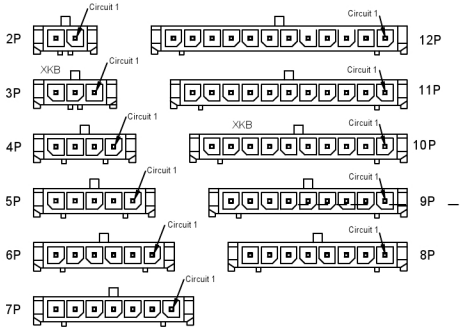

X3025 W V X-XX X- XX SN XX

① ②③④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.
② Category： W-wafer
③ Welding Board Angle: V- Straight 180°
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: XX-02P~12P
⑥ Plug the Pin & Special No.:
⑦ Material： 46-PA46 94V- N0-PA9T 94V-0;
XKB 66-PA66 94V-0
⑧ Planting Category: SN-Bright tin plating
⑨ Color： Blank-Natural Color

■Specifications ：

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10m Ω XKB
- After environmental testing ： ≤20mΩ

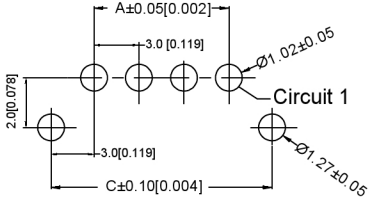

P.C.B LAYOUT

Poles	Dimensions(mm)		
	A	B	C
02	3.00	9.65	9.00
03	6.00	12.65	12.00
04	9.00	15.65	15.00
05	12.00	18.65	18.00
06	15.00	21.65	21.00
07	18.00	24.65	24.00
08	21.00	27.65	27.00
09	24.00	30.65	30.00
10	27.00	33.65	33.00
11	30.00	36.65	36.00
12	33.00	39.65	39.00



X3025WV-XX-66SN	PA66 UL 94V-0	Brass	Tin-Plated	X3025H
X3025WV- XX-46SNP	A46 UL 94V-0			
X3025WV-XX-N0SNP	A9T UL 94V-0			
PART N0	Materi al	Material(Pin)	Finish(Pin)	Mates With XKB Housing

广东星坤科技股份有限公司
生效日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED

REVISIONS

www.hellxkb.com

XKB	ANGLAR	±5°
	L≤4	±0.2
	4<L≤16	±0.3
	16<L≤63	±0.4
	L>63	±0.5

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE: X3025WV-X X-XXSN
DWN		DATE		VIEW:	PART NO.: 3.00mm Crimp Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0