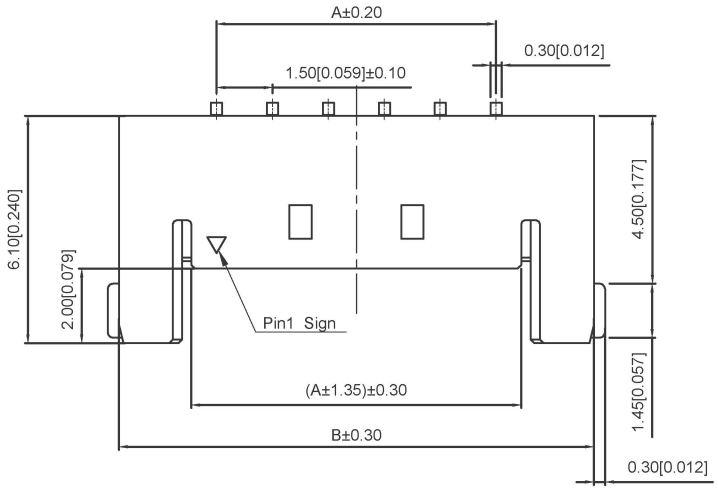



02~04P Single Hole
Scale 1:0.7

Specifications:
规格：
Voltage rating:150V AC/DC
额定电压：150V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:500V AC/minute
耐受电压：500V AC/分钟
Temperature range:-25℃-+85℃
温度范围：-25℃-+85℃
Insulation resistance:≥1000MΩ
绝缘电阻：≥1000MΩ
Contact resistance:≤20mΩ
接触电阻：≤20mΩ
After environmental testing:≤40mΩ
环境测试后：≤40兆欧

X1503 W R S-XX XX-9T SN
① ②③④ ⑤ ⑥ ⑦ ⑧

1.Series No.
2.Category:W-wafer
3.Welding Board Angle:R-Right Angle 90°
4.Welding Way:S-SMT
5.Row No-Pin No：XX-02P~12P
6.Plug the pin&special No
7.Material：9T PA94 94V-0
8.Planting style:SN-Bright tin plating

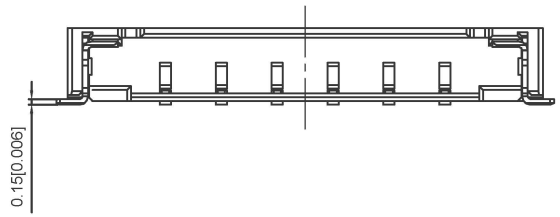

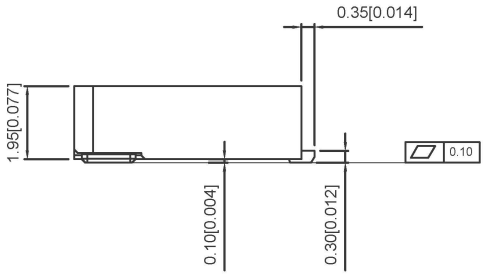



Poles	Dimensions(mm)	
	A	B
02	1.50	6.75
03	3.00	8.25
04	4.50	9.75
05	6.00	11.25
06	7.50	12.75
07	9.00	14.25
08	10.50	15.75
09	12.00	17.25
10	13.50	18.75
11	15.00	20.25
12	16.50	21.75

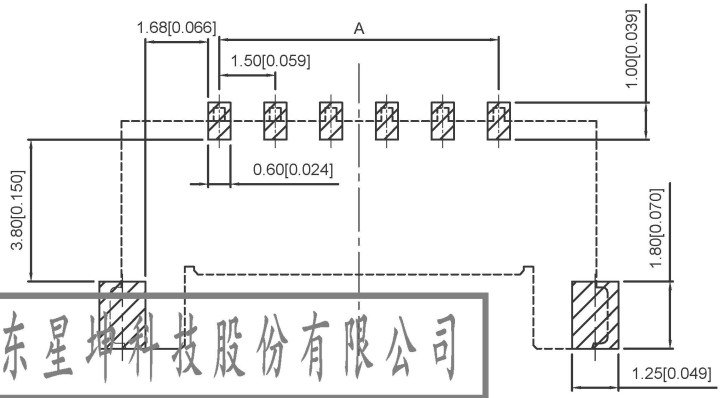



X1503WRS-XX-9TSN	Nylon 9T UL 94V-0	Brass	Tin-Plated	X1503H	1000PCS
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal	Qty/Reel

广东星坤科技股份有限公司
生效日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

MODEL TYPE: Wire to board connector
PART NO.: 1.50mm Crimp Style Connectors
DWG NO.: X1503WRS-XX-9TSN

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn