

Inductor



Figure



Type A



Type B

Note: The image shown here is indicative only. If there is inconsistency between the image and the actual product, the actual product shall govern.

Specifications:

<i>SERIES : SKPC-EREA25-XXX</i>	
Test Conditions:	25°C 10KHz 1V
Inductance :	25μH±5% (No Current)
Dimensions(L*W*H):	74*53*26mm
Pins and Connection	2*Terminals
Hi-Pot(Wire to Core)	1KV/3KV/5KV DC①

Model	Type	DCR Max 20°C	Isat L drops 20% (Max)	Irms Temperature Rise 40°C (Max.) ②	Weight (Max)
SKPC-EREA25-3A(135)	A	2.8mΩ	14A	14A	182g
SKPC-EREA25-4A(135)	A	3.9mΩ	20A	14.4A	182g
SKPC-EREA25-5B(135)	B	1.7mΩ	28A	24A	255g
SKPC-EREA25-6B(135)	B	1.5mΩ	34A	32A	205g
SKPC-EREA25-7B(135)	B	1.8mΩ	42A	32A	329g
SKPC-EREA25-8B(135)	B	2.5mΩ	48A	32A	351g
SKPC-EREA25-9B(135)	B	3.8mΩ	54A	32A	351g
SKPC-EREA25-10B(135)	B	3.6mΩ	60A	24A	323g
SKPC-EREA25-11B(135)	B	3.9mΩ	69A	24A	323g
SKPC-EREA25-12B(135)	B	4.3mΩ	73A	24A	323g
SKPC-EREA25-13B(135)	B	4.7mΩ	77A	24A	340g
SKPC-EREA25-14B(135)	B	5.0mΩ	83A	24A	340g
SKPC-EREA25-15B(135)	B	5.4mΩ	88A	24A	340g

Operating temperature: -40°C to +75°C

Inductor



Note:


1. Classification of different Hi-Pot level : 1-1KVDC/3-3KVDC/5-5KVDC
2. Since different ways of heat dissipation affect Temperature rise, Temperature rise is reference.

Material List


No.	Item	Material Description
1	Core	Ferrite
2	Wire	Copper
3	Solder (Lead Free)	SnAg3%Cu
4	Insulation	Polyimide+Polyamide-imide Resin

Note: Temperature tolerance grade: **H CLASS**

Schematic Diagram



Configurations and Dimensions (mm)


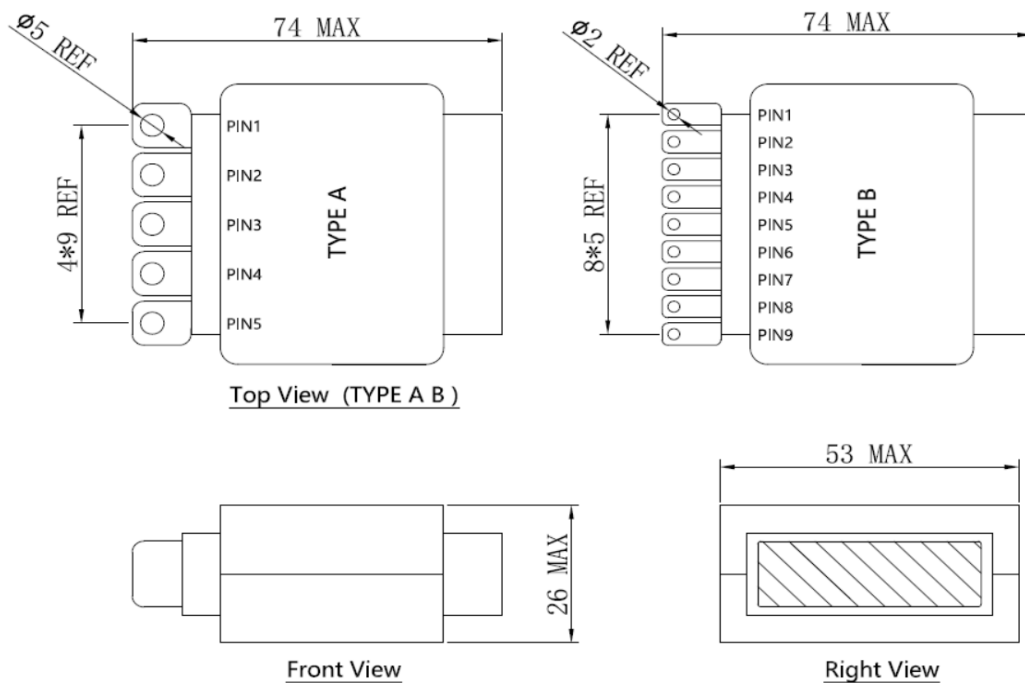


Inductor







Model.	Type	Description of pins
SKPC-EREA25-3A(135)	A	PIN1+PIN4
SKPC-EREA25-4A(135)	A	PIN1+PIN5
SKPC-EREA25-5B(135)	B	PIN2+PIN7
SKPC-EREA25-6B(135)	B	PIN2+PIN8
SKPC-EREA25-7B(135)	B	PIN1+PIN8
SKPC-EREA25-8B(135)	B	PIN1+PIN9
SKPC-EREA25-9B(135)	B	PIN1+PIN8
SKPC-EREA25-10B(135)	B	PIN1+PIN9
SKPC-EREA25-11B(135)	B	PIN1+PIN8
SKPC-EREA25-12B(135)	B	PIN1+PIN9
SKPC-EREA25-13B(135)	B	PIN1+PIN8
SKPC-EREA25-14B(135)	B	PIN1+PIN9
SKPC-EREA25-15B(135)	B	PIN1+PIN8





L(uH) vs Frequency(KHz)

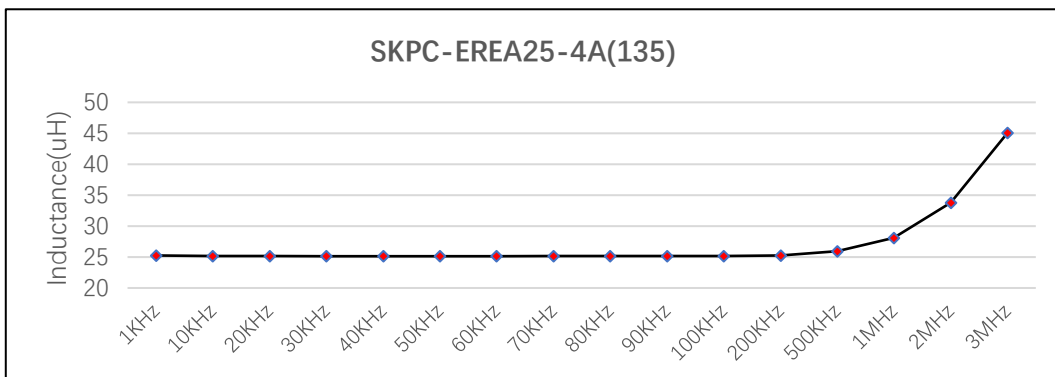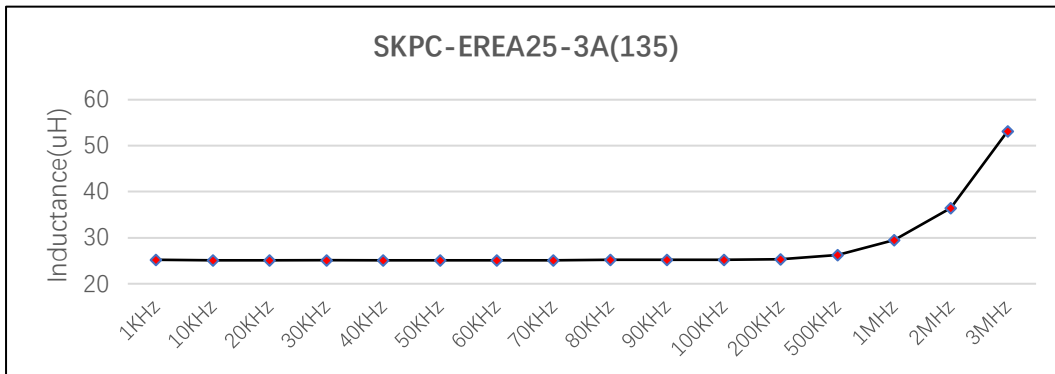




Inductor

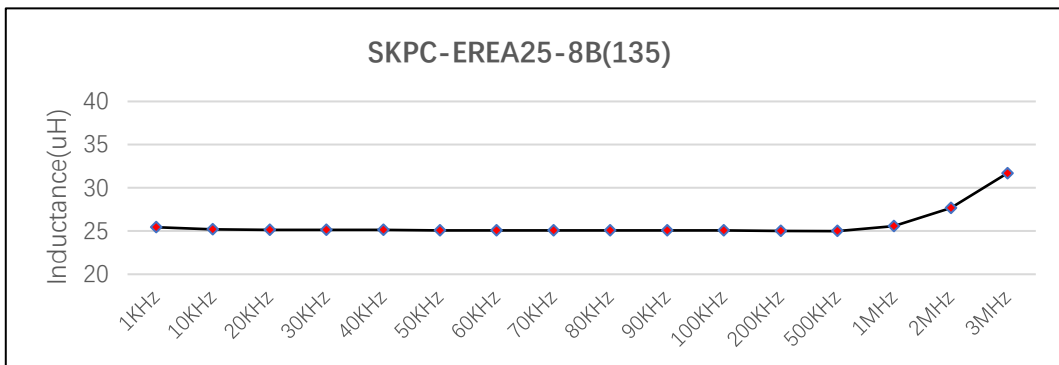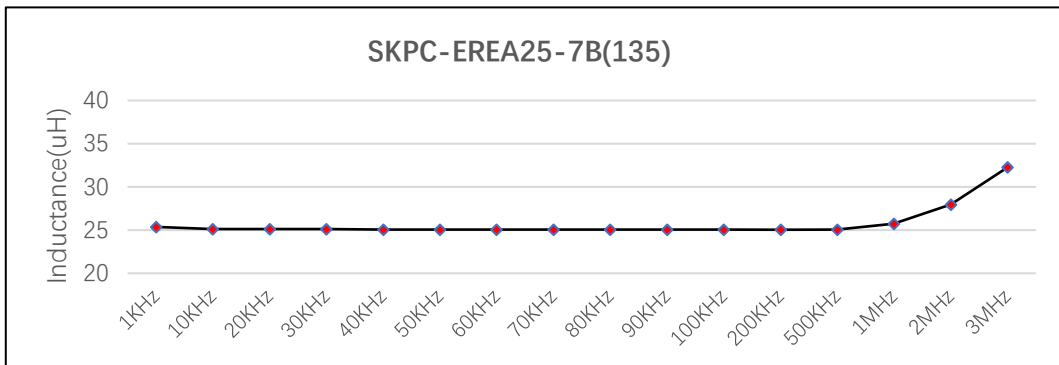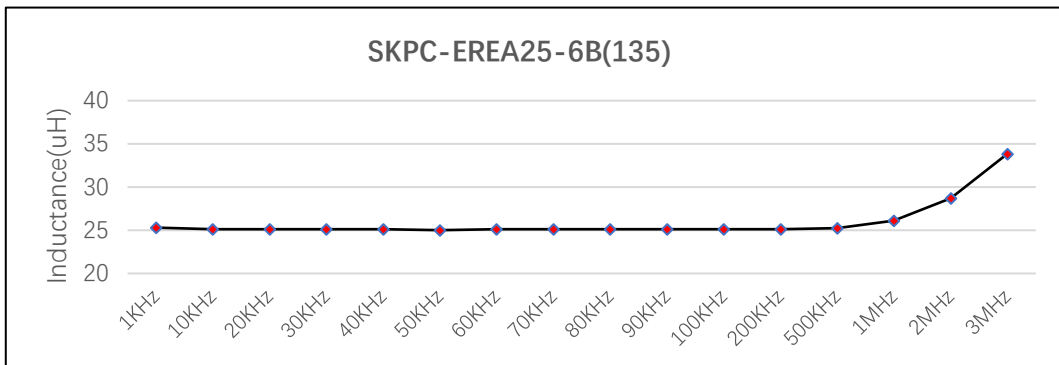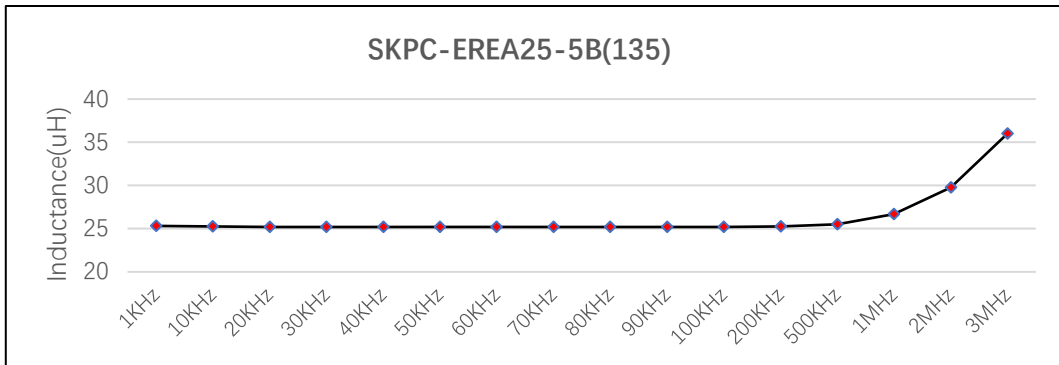

Inductor

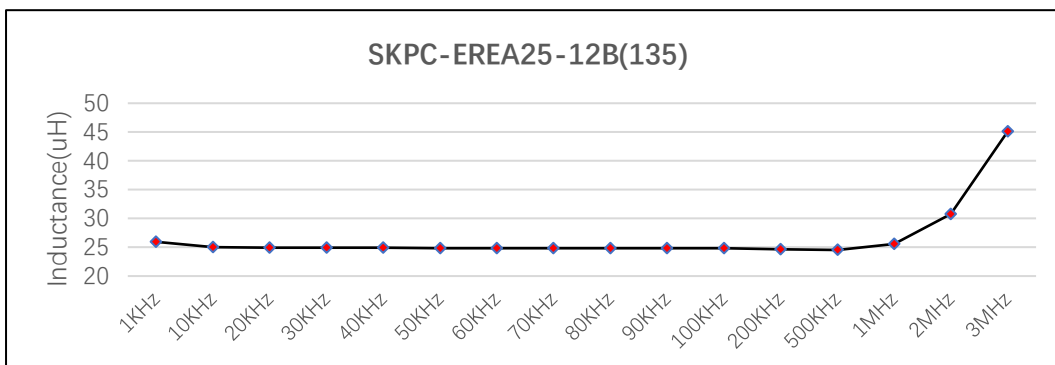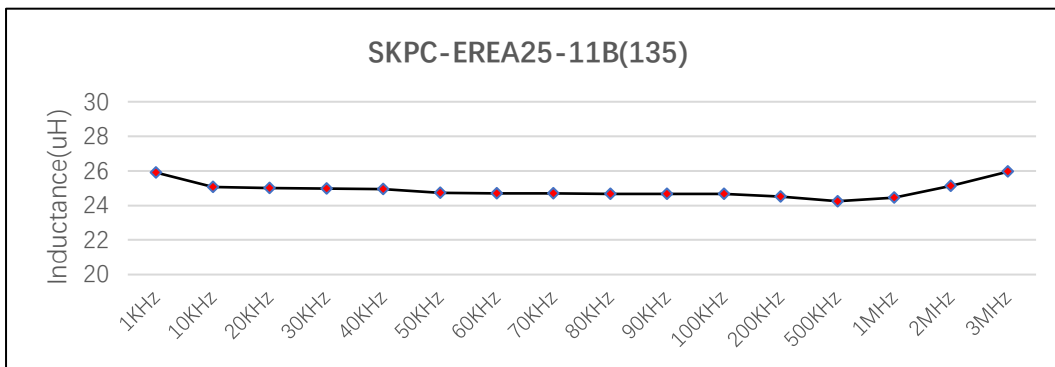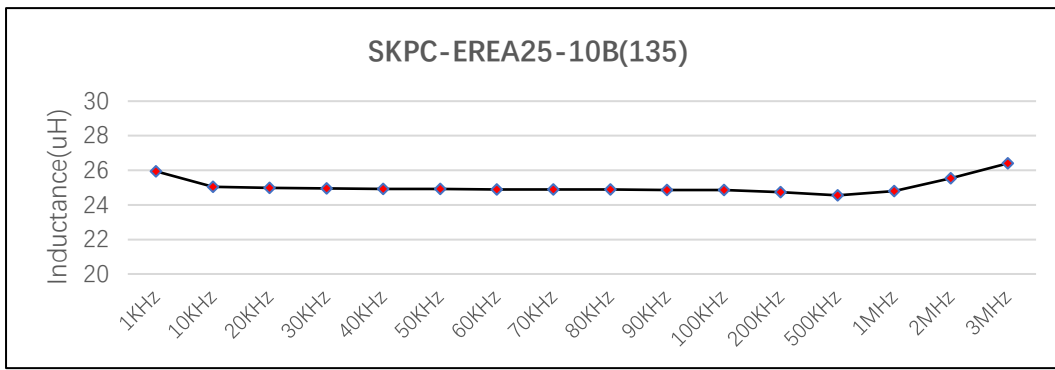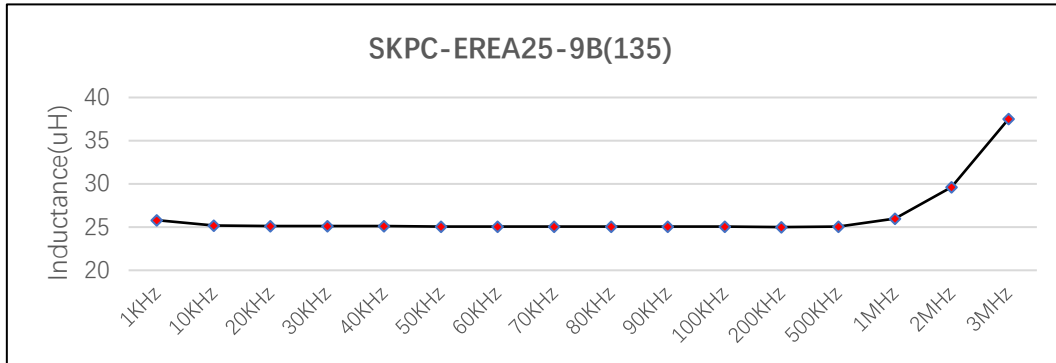

Inductor

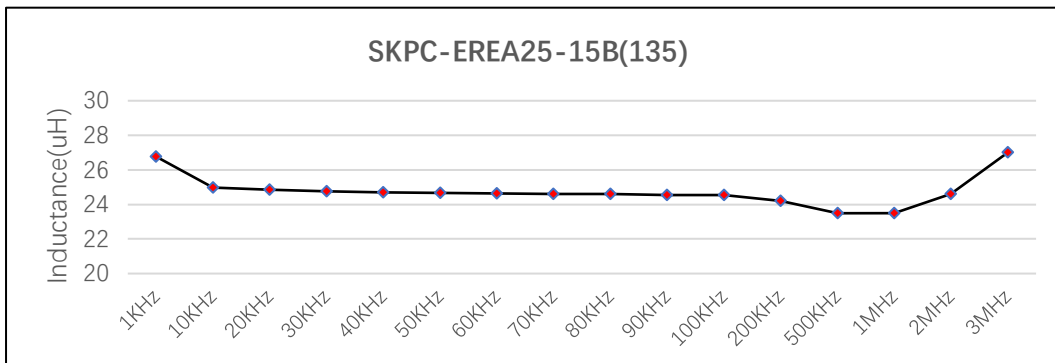
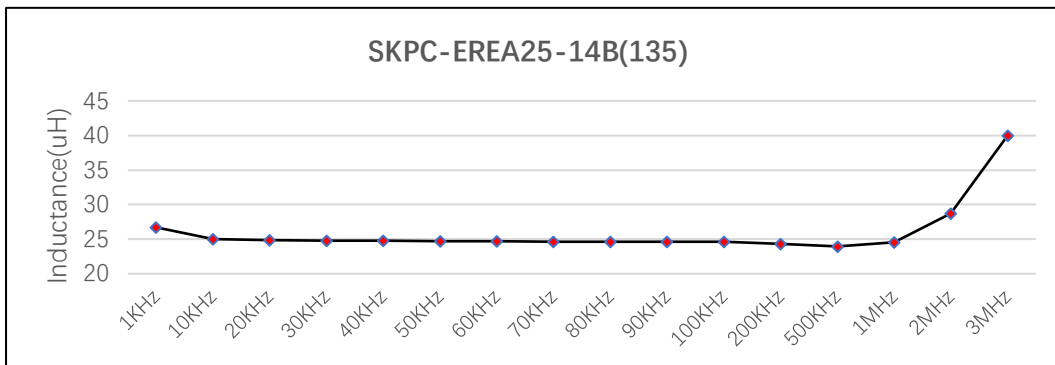
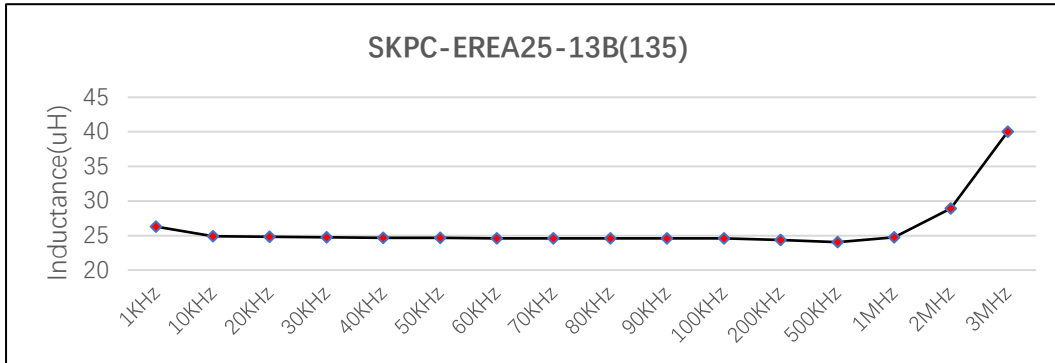


Note: This data is based on the WK-3260B.




Inductor






L(uH) vs Current(A)

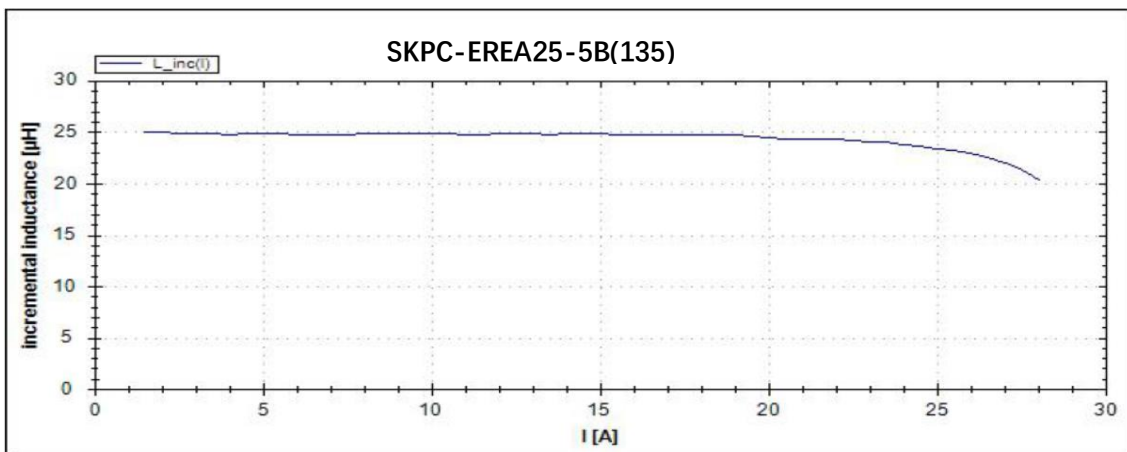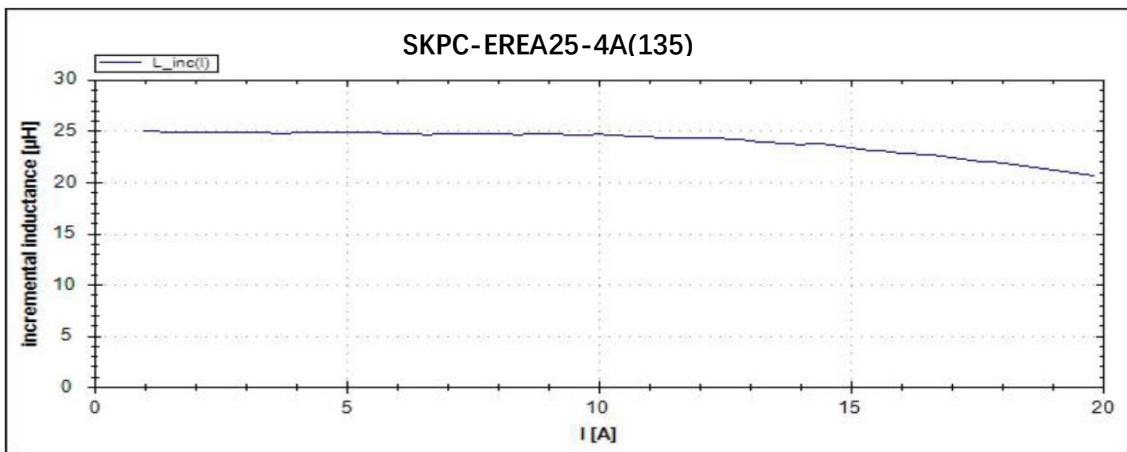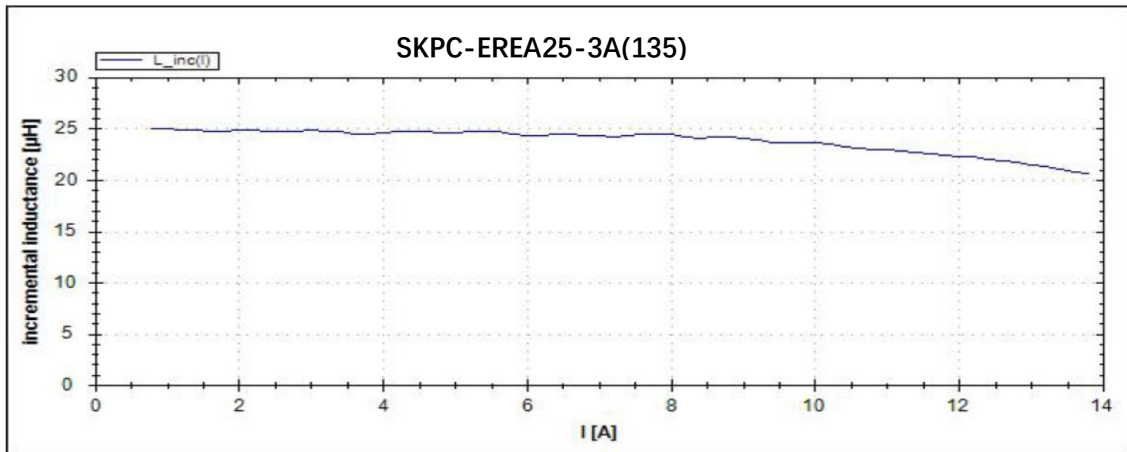




Inductor

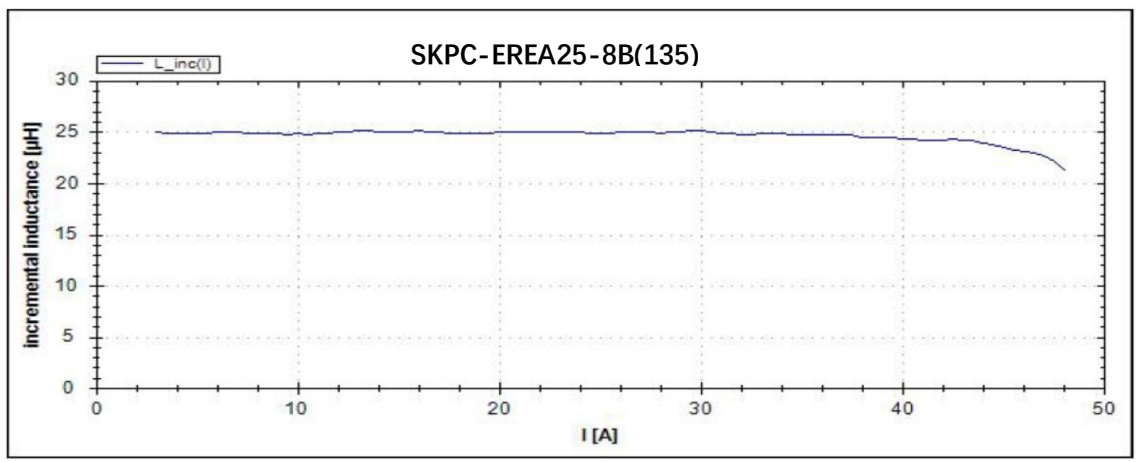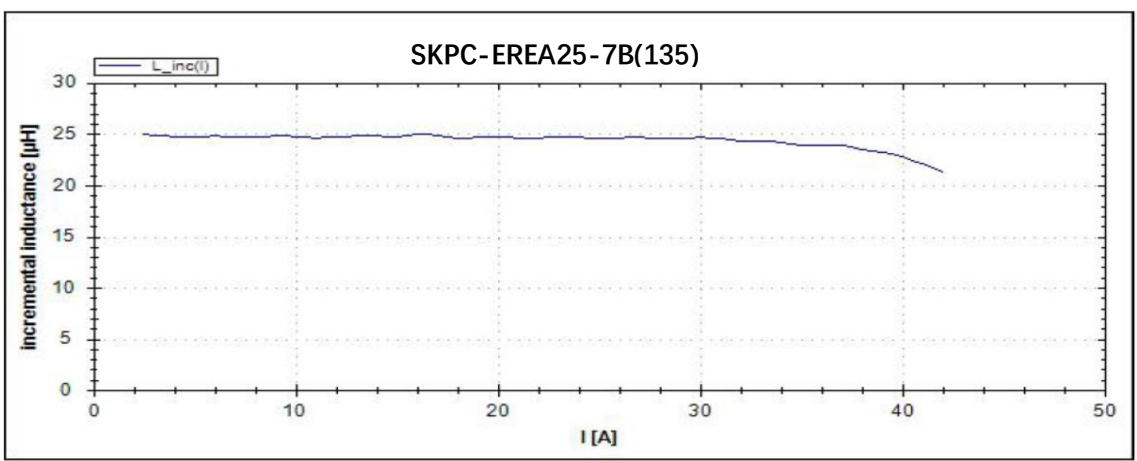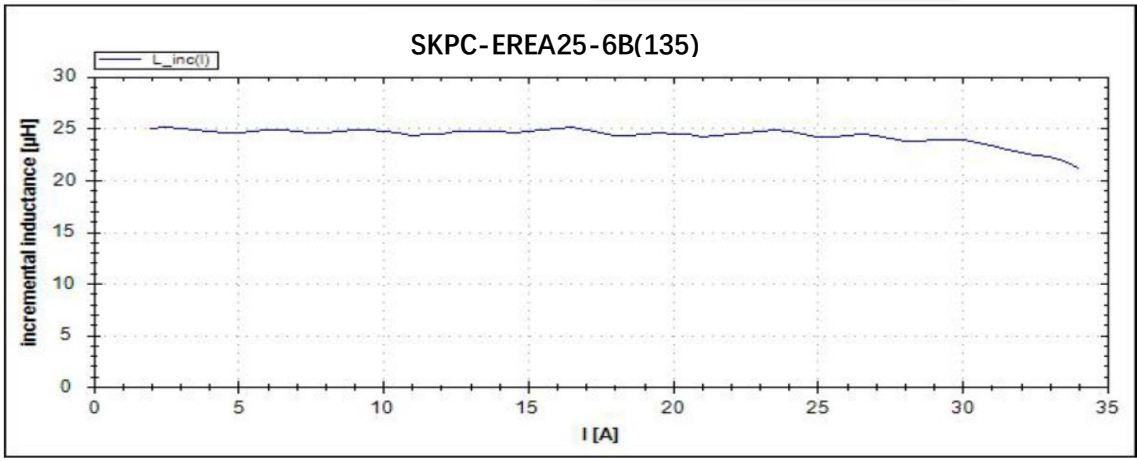


Inductor

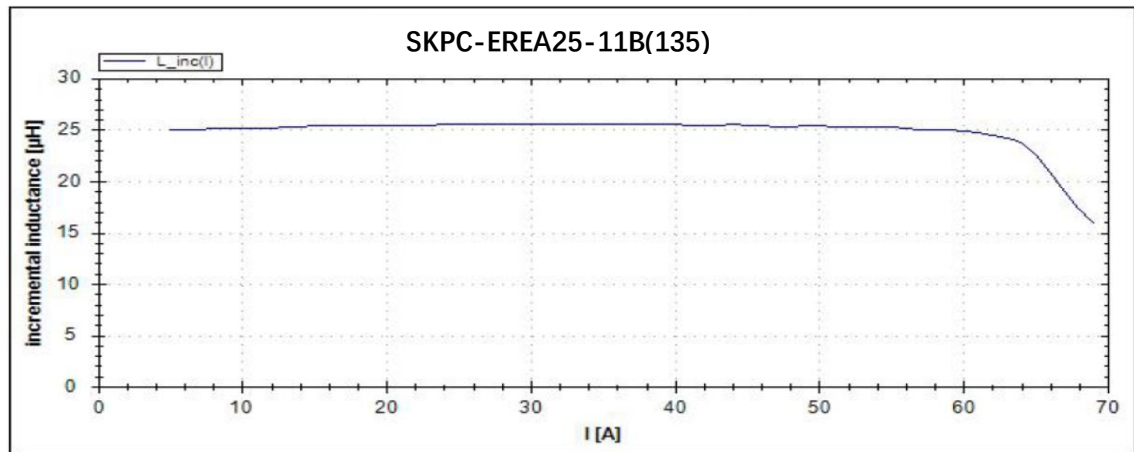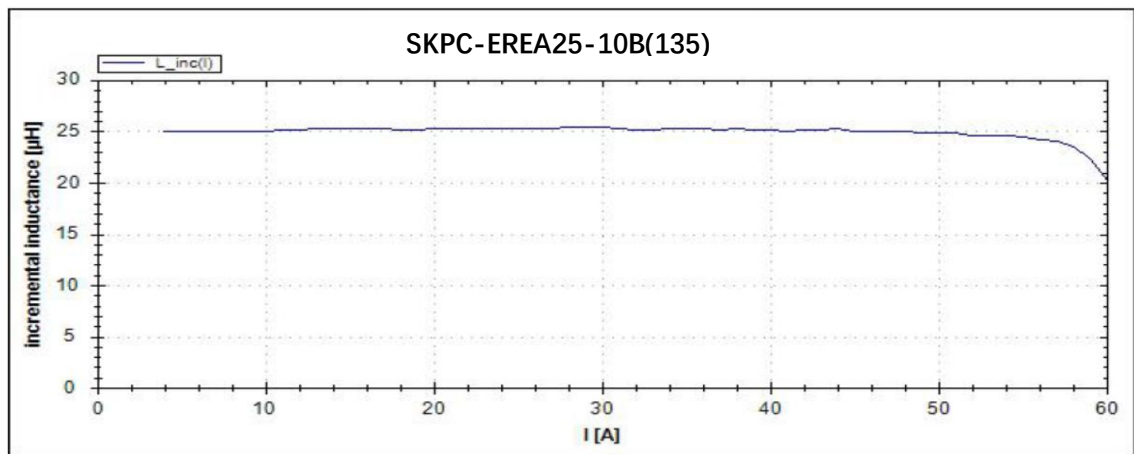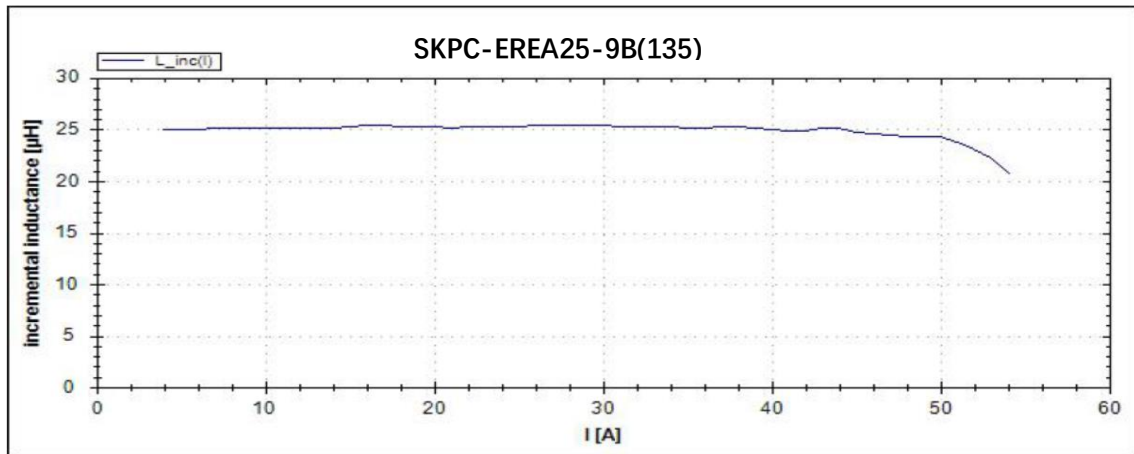

Inductor

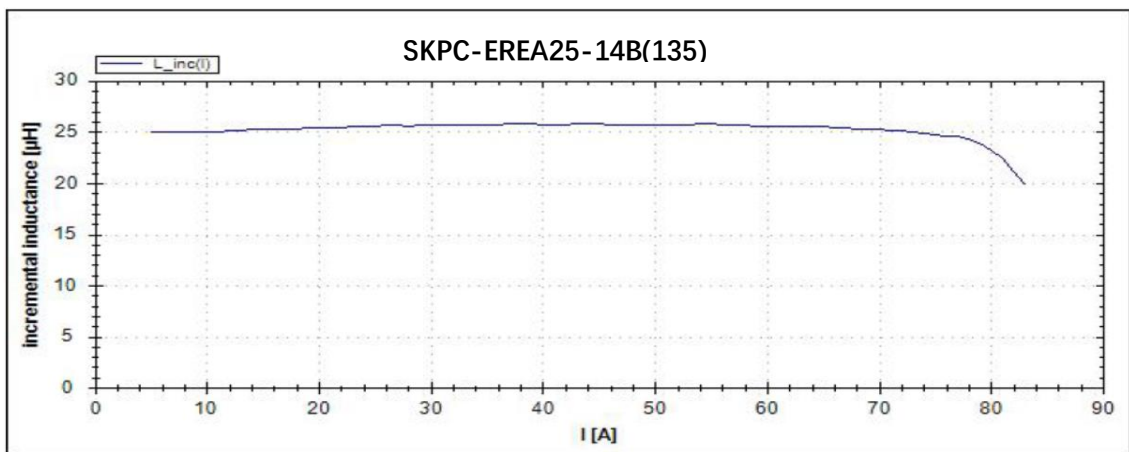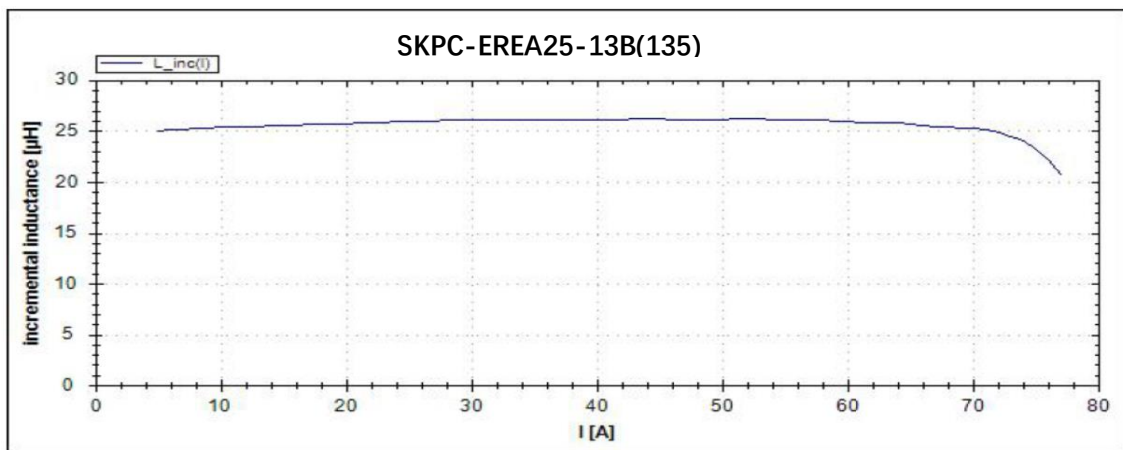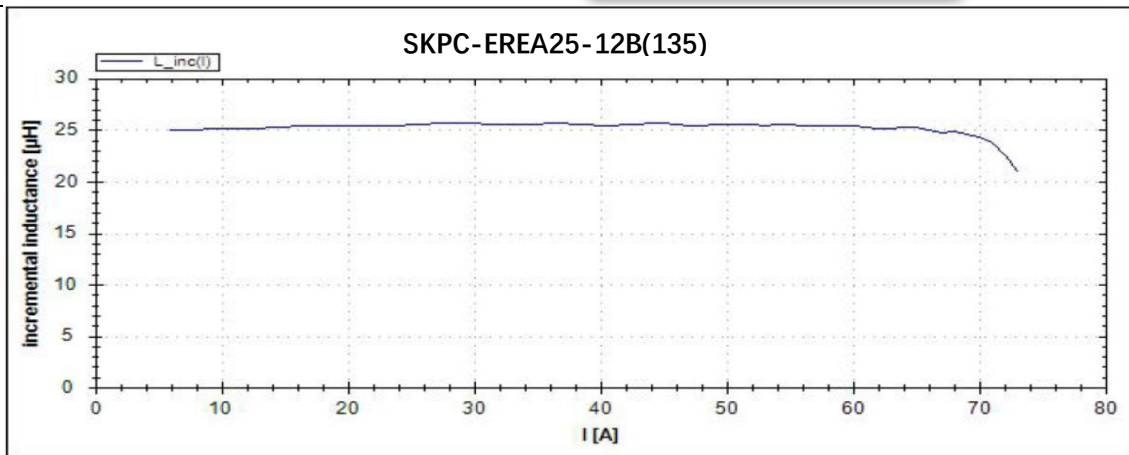

Inductor

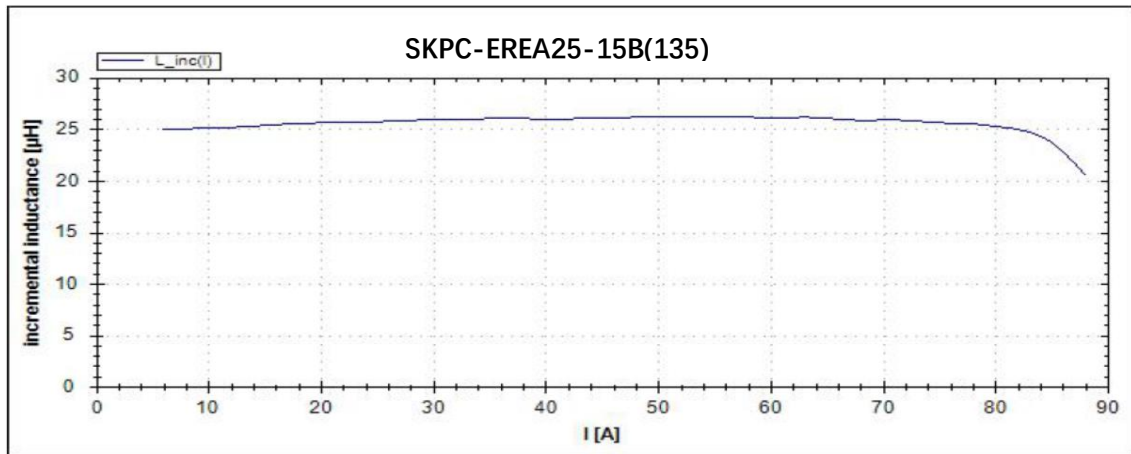

Note: This data is based on the DPG10 Power Choke Tester.