

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 30A
2. Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	400V
Rate current(A)	32A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.62mm, Poles : N=02~12P
3. Operating temperature: -30°C~+120°C
4. Undimensioned tolerances:





Pitch range in mm		Nominal dimension range in mm		Pitch range in mm		Nominal dimension range in mm	
Over	TO	Over	TO	Over	TO	Over	TO
6	10	30	60	100	150	0.1/10	<
10	24	30	60	100	150	<	<
±0.15		±0.20		±0.30		±0.50	
±0.30		±0.50		±0.70		±1.00	
±1.30		±1.50		±1.70		±2.00	

5. RoHS Compliance

Ordering Information

JL5EDGVM-762 XX G 0 1

Pitch 762=7.62PH No.of pins 2P,3P,4P-12P
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow D=Orange E=Grey
 Packing 0=Reel bag T=Tube A=Tray

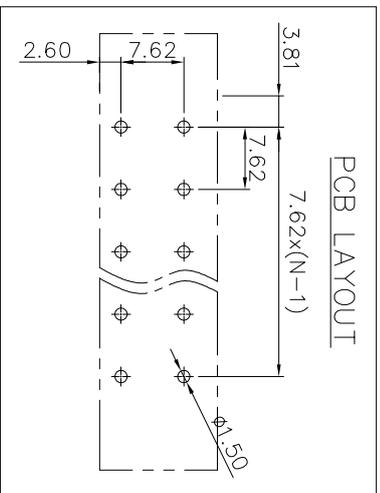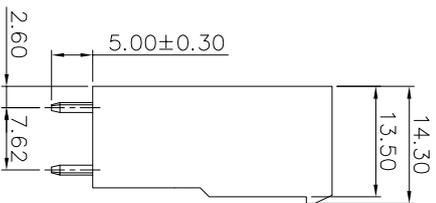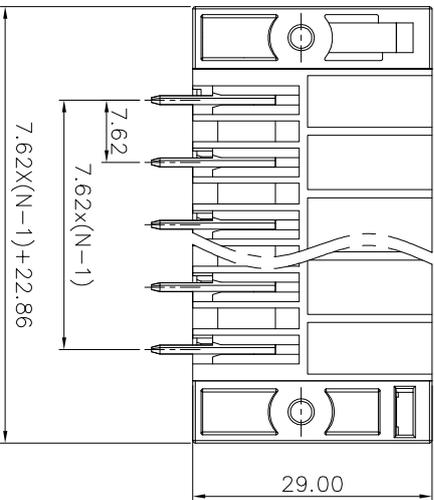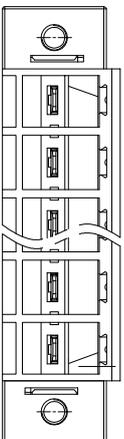

DRAW	SHUANGPING ZHENG	SCALE	FIT	<p>JIN 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD</p>	
CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4		
		SHEET	1/1	PART NO.	JL5EDGVM-762XXG01
		PRD		TITLE:	JL5EDGVM-762-XXP 插拔式公座/绿色

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		20.12.02