
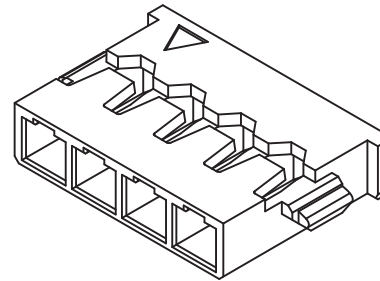


环保物料

TEL: 0769-82001899

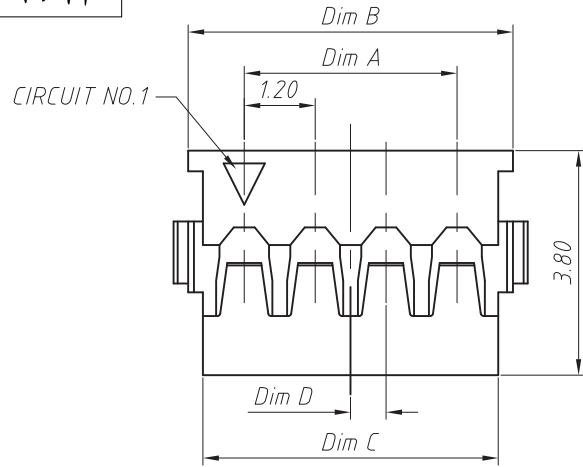



SPECIFICATIONS

- 1.Voltage rating: 50V AC, DC
- 2.Current rating: 2A, AC, DC
- 3.Withstanding Voltage: 500V AC/minute
- 4.Insulation resistance:100M min
- 5.Temperature range: -25 °C-+85 °C
- 6.Contact resistance: 20m max

HOUSING

Housing Material:Nylon66 UL94V-0(2)
 Accepts :T1201 terminal
 Mates with: M1201 series header
 Poles : 02-10P
 Part No.: P1201-xx-BK

Pin位数

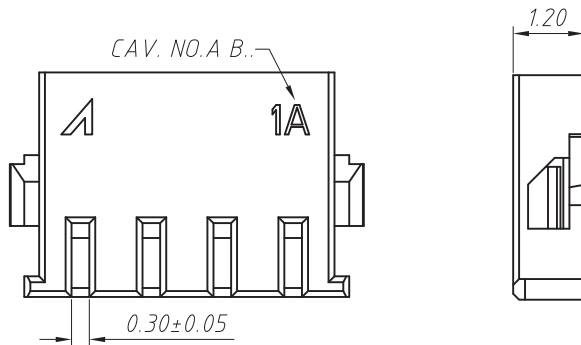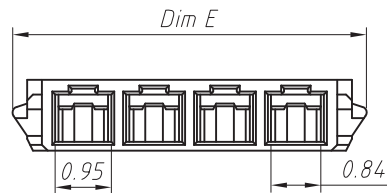

CKT.	Dim A	Dim B	Dim C	Dim D	Dim E
2	1.2	3.1	2.6	0.6	3.6
3	2.4	4.3	3.8	1.2	4.8
4	3.6	5.5	5.0	0.6	6.0
5	4.8	6.7	6.2	1.2	7.2
6	6.0	7.9	7.4	0.6	8.4
7	7.2	9.1	8.6	1.2	9.6
8	8.4	10.3	9.8	0.6	10.8
9	9.6	11.5	11.0	1.2	12.0
10	10.8	12.7	12.2	0.6	13.2
11	12.0	13.9	13.4	1.2	14.4
12	13.2	15.1	14.6	0.6	15.6
13	14.4	16.3	15.8	1.2	16.8
14	15.6	17.5	17.0	0.6	18.0
15	16.8	18.7	18.2	1.2	19.2

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN

CK tan

CHKD

APPD

VIEW



XFCN 兴飞连接器有限公司
 XFCN CONNECTORS CO.,LTD.

PRODUCT NAME

1.20mm Crimp Style Connectors

PART. NO.

P1201-xx-BK

SHEET

1/1

DATE

2020. 04. 12

UNITS

mm

SCALE

1:1

DWG. NO.

009

AO

VER

MODIFICATION

DRAW

DATE

1

2

3

4

5

6

7

8

9

10