

ESD0603UC5VB

ESD0603UC5VB Ultra low capacitance ESD Protection Diode


General description

Ultra low capacitance ESD Protection Diode in a DFN0603 Package.

FEATURES

- Ultra low Capacitance Typ 0.2 pF
- 100Watts peak pulse power($t_p=8/20\mu S$)
- Tiny DFN0603 package
- Bidirectional configurations
- R2R + Zener Technology
- Low Clamping voltage
- Low leakage current

Package Outline

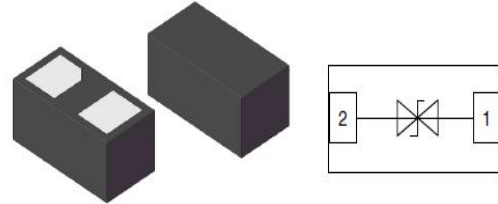

DFN0603 Package

Absolute Maximum Ratings ($T_A = 25^\circ C$ unless otherwise noted)

Symbol	Parameter	Value	Units
T_L	Max Lead Solder Temperature range (10 Second Duration)	260	$^\circ C$
T_{stg}	Storage Temperature Range	-55 to +150	$^\circ C$
T_{OP}	Max operation Temperature Range	125	$^\circ C$
ESD	IEC61000-4-4 (EFT 5/50nS)	40	A
ESD	IEC61000-4-5 (8/20uS)	5	A
ESD	IEC61000-4-2 Air Discharge Contact Discharge	± 20 ± 15	KV

Device Marking:

Device Type	Marking
ESD0603UC5VB	U5 or 5BU

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	± 20 ± 15	kV
I_{pp}	Peak Pulse Current (8/20 μs)	5	A
P_{pp}	Peak Pulse Power (8/20 μs)	100	W

ABSOLUTE MAXIMUM RATING





Electrical Characteristics ($T_A = 25^\circ C$ unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V_{RWM}	Reverse Working Voltage				5	V
V_{BR}	Reverse Breakdown Voltage	$I_T = 1mA$	5.5	8.5		V
I_R	Reverse Leakage Current	$V_{RWM} = 5V$		5	100	nA
V_C	Clamping Voltage	$I_{PP} = 5A, t_p = 8/20\mu s$			20	V
V_C	Clamping Voltage	$V_{ESD} = 8kV$		20		V
C_J	Junction Capacitance	$V_R = 0V, f = 1MHz$		0.2		pF




ESD0603UC5VB

Typical Characteristic:

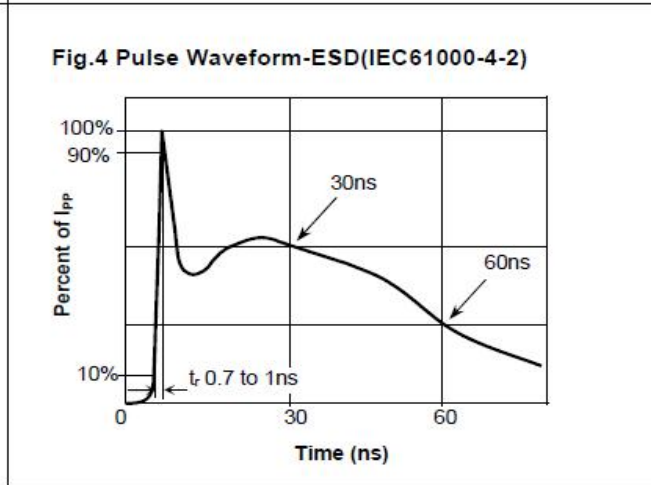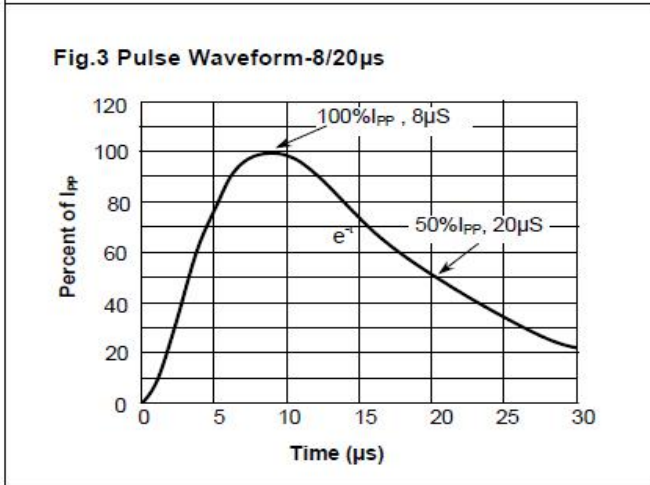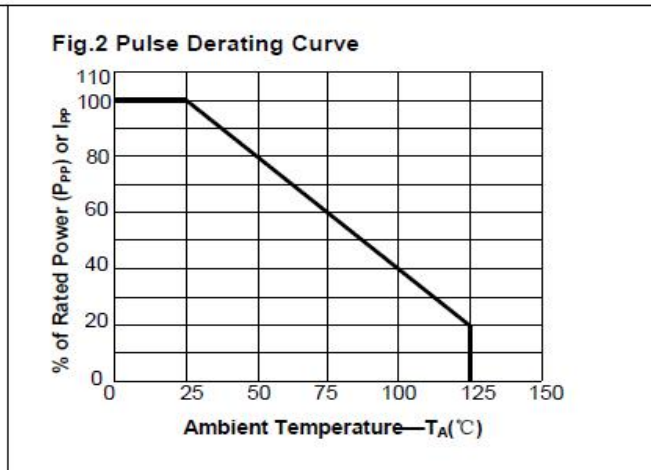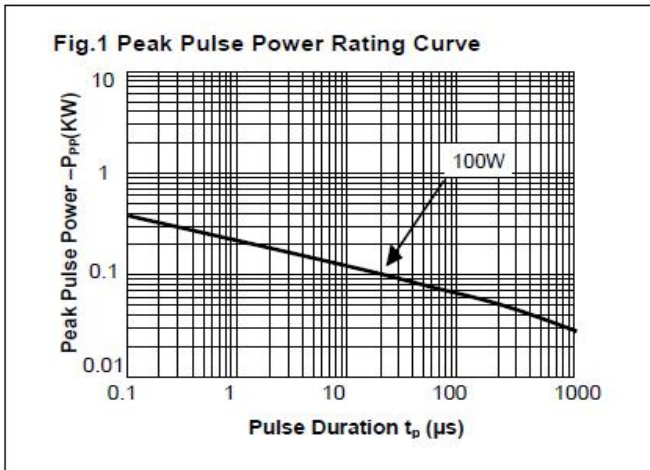


DFN1006 Package Outline

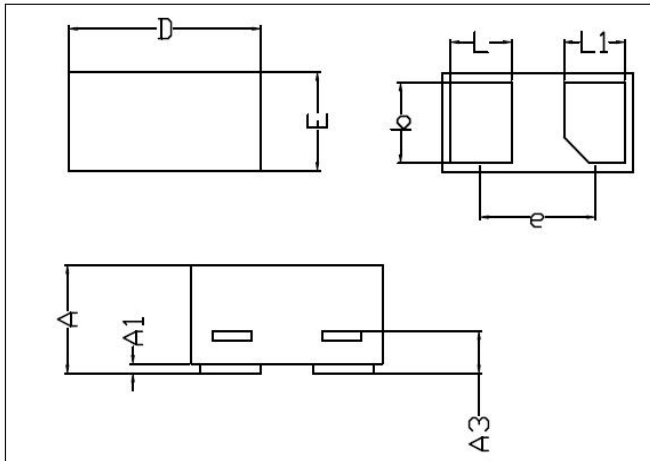

Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	0.23	-	0.33
A1	0.00	-	0.05
A3	0.102 REF		
D	0.55	0.60	0.65
E	0.25	0.30	0.35
b	0.215	0.245	0.275
L	0.160	0.190	0.220
L1	0.160	0.190	0.220
e	0.355 BSC		

Pad Dimensions

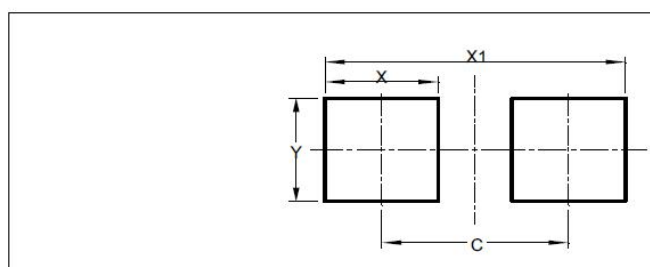

Dimensions	Value (mm)
C	0.380
X	0.230
X1	0.610
Y	0.300

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.