

MMBT3904C

MMBT3904C SOT-883 Silicon General Purpose Transistor (NPN)

General description

SOT-883 Silicon General Purpose Transistor (NPN)

FEATURES

- Simplifies Circuit Design
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Weight: approx. 0.001g

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)


| Symbol | Parameter | Value | Units |
|-----------------|---|-------------|---------------------------|
| V_{CBO} | Collector-Base Voltage | 60 | V |
| V_{CEO} | Collector-Emitter Voltage | 40 | V |
| V_{EBO} | Emitter-Base Voltage | 6 | V |
| I_C | Collector Current | 200 | mA |
| P_D | Power Dissipation (FR-4 Board – minimum pad 25°C) | 200 | mW |
| $R_{\theta JA}$ | Thermal Resistance from Junction to Ambient | 500 | $^\circ\text{C}/\text{W}$ |
| T_j T_{STG} | Junction & Storage Temperature Range | -55 to +150 | $^\circ\text{C}$ |

Green Product




SOT-883 (DFN1006-3)

Electrical Symbol:

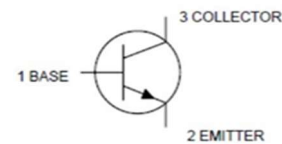

Device Marking Code:

| Device Type | Marking | Shipping |
|-------------|---|-------------|
| MMBT3904C |  | 10,000/Reel |

Off Characteristics

| Symbol | Parameter | Test Condition | Limits | | Unit |
|---------------|---|---|--------|-----|---------------|
| | | | Min | Max | |
| $V_{(BR)CEO}$ | Collector-Emitter Breakdown Voltage (Note 1) | $I_C = 1\text{mA}, I_B = 0\text{A}$ | 40 | - | Volts |
| $V_{(BR)CBO}$ | Collector-Base Breakdown Voltage | $I_C = 10\text{uA}, I_E = 0\text{A}$ | 60 | - | Volts |
| $V_{(BR)EBO}$ | Emitter-Base Breakdown Voltage | $I_E = 10\text{uA}, I_B = 0\text{A}$ | 6 | - | Volts |
| I_{CBO} | Collector Cutoff Current | $V_{CB} = 60\text{V}, I_E = 0\text{A}$ | - | 0.1 | μA |
| I_{CEX} | Collector Cutoff Current | $V_{CE} = 30\text{V}, V_{EB} = 3\text{V}$ | - | 50 | nA |
| I_{EBO} | Emitter Cutoff Current | $V_{EB} = 5\text{V}, I_C = 0\text{A}$ | - | 0.1 | μA |

Note 1: Pulse Test. Pulse width <300us, Duty cycle < 2.0%

MMBT3904C

On Characteristics

| Symbol | Parameter | Test Condition | Limits | | Unit |
|----------------------|--------------------------------------|--|--------|------|-------|
| | | | Min | Max | |
| H _{FE} | DC Current Gain | I _C =0.1mA, V _{CE} =1V | 40 | - | - |
| | | I _C =1.0mA, V _{CE} =1V | 70 | - | |
| | | I _C =10mA, V _{CE} =1V | 100 | 300 | |
| | | I _C =50mA, V _{CE} =1V | 60 | - | |
| | | I _C =100mA, V _{CE} =1V | 30 | - | |
| V _{CE(sat)} | Collector-Emitter Saturation Voltage | I _C =10mA, I _B =1mA | - | 0.2 | Volts |
| | | I _C =50mA, I _B =5mA | - | 0.3 | |
| V _{BE(sat)} | Base-Emitter Saturation Voltage | I _C =10mA, I _B =1mA | 0.65 | 0.85 | Volts |
| | | I _C =50mA, I _B =5mA | - | 0.95 | |

Small-signal Characteristics


| Symbol | Parameter | Test Condition | Limits | | Unit |
|------------------|--------------------------------|--|--------|-----|-------------------|
| | | | Min | Max | |
| f _T | Current-Gain-Bandwidth Product | I _C =10mA, V _{CE} =20V, f = 100MHz | 200 | - | MHz |
| C _{obo} | Output Capacitance | V _{CB} =5V, I _E =0A, f = 1.0MHz | - | 4 | pF |
| C _{ibo} | Input Capacitance | V _{BE} =0.5V, I _C =0A, f = 1.0MHz | - | 8 | pF |
| h _{ie} | Input Impedance | V _{CE} =10V, I _C =1mA, f = 1.0kHz | 1 | 10 | kΩ |
| h _{re} | Voltage Feedback Ratio | V _{CE} =10V, I _C =1mA, f = 1.0kHz | 0.5 | 8 | X10 ⁻⁴ |
| h _{fe} | Small-signal Current Gain | V _{CE} =10V, I _C =1mA, f = 1.0kHz | 100 | 400 | - |
| h _{oe} | Output Admittance | V _{CE} =10V, I _C =1mA, f = 1.0kHz | 1 | 40 | Ωmhos |
| NF | Noise Figure | V _{CE} =5V, I _C =100uA R _S =1.0kΩ f = 1.0kHz | | 5 | dB |

Switching Characteristics

| Symbol | Parameter | Test Condition | Limits | | Unit |
|----------------|--------------|---|--------|-----|------|
| | | | Min | Max | |
| t _d | Delay Time | V _{CC} =3V, V _{BE} =0.5V, | - | 35 | nS |
| t _r | Rise Time | I _C =10mA, I _{B1} =1mA | - | 35 | |
| t _s | Storage Time | V _{CC} =3V, I _C =10mA, | - | 200 | nS |
| t _f | Fall Time | I _{B1} = I _{B2} = 1mA | - | 50 | |

MMBT3904C

SOT-883 Package Outline

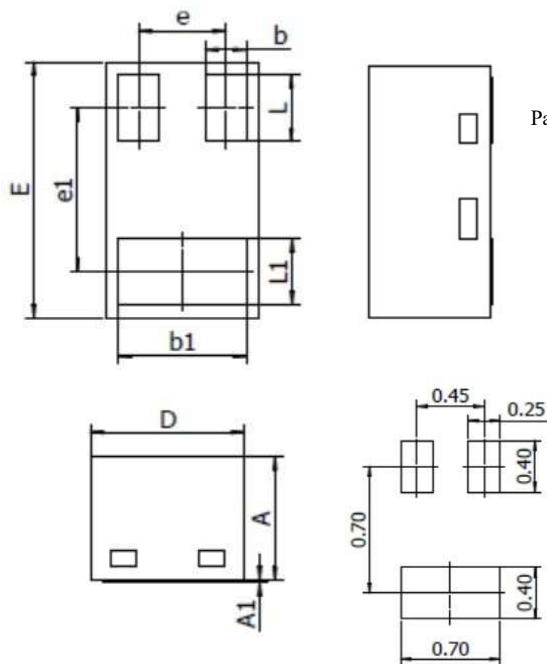

Typical Soldering Pattern(mm):

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.46 | 0.50 | 0.018 | 0.020 |
| A1 | --- | 0.03 | --- | 0.001 |
| D | 0.55 | 0.65 | 0.022 | 0.026 |
| E | 0.95 | 1.05 | 0.037 | 0.041 |
| b | 0.12 | 0.22 | 0.005 | 0.008 |
| b1 | 0.45 | 0.55 | 0.018 | 0.022 |
| L | 0.22 | 0.32 | 0.008 | 0.013 |
| L1 | 0.22 | 0.32 | 0.008 | 0.013 |
| e | Typ. 0.34 | | Typ. 0.013 | |
| e1 | Typ. 0.65 | | Typ. 0.026 | |

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.