CAD FILE:



Technical Data
Material:
Contact material:Brass
Plating:Gold Flash
Insulator material:Black polyester UL94V-0
Standard:PBT+30%G.F

Electrical:
Current rating:3Amps/contact max.
Contact resistance:≤20mΩ/contact
Insulation resistance:≥1000MΩ at V=100V
Withstanding voltage:550V AC/minute

Mechanical:
Soldering temperature:+220℃,4s max

UNSPECIFIED TOLERANCE:±0.20

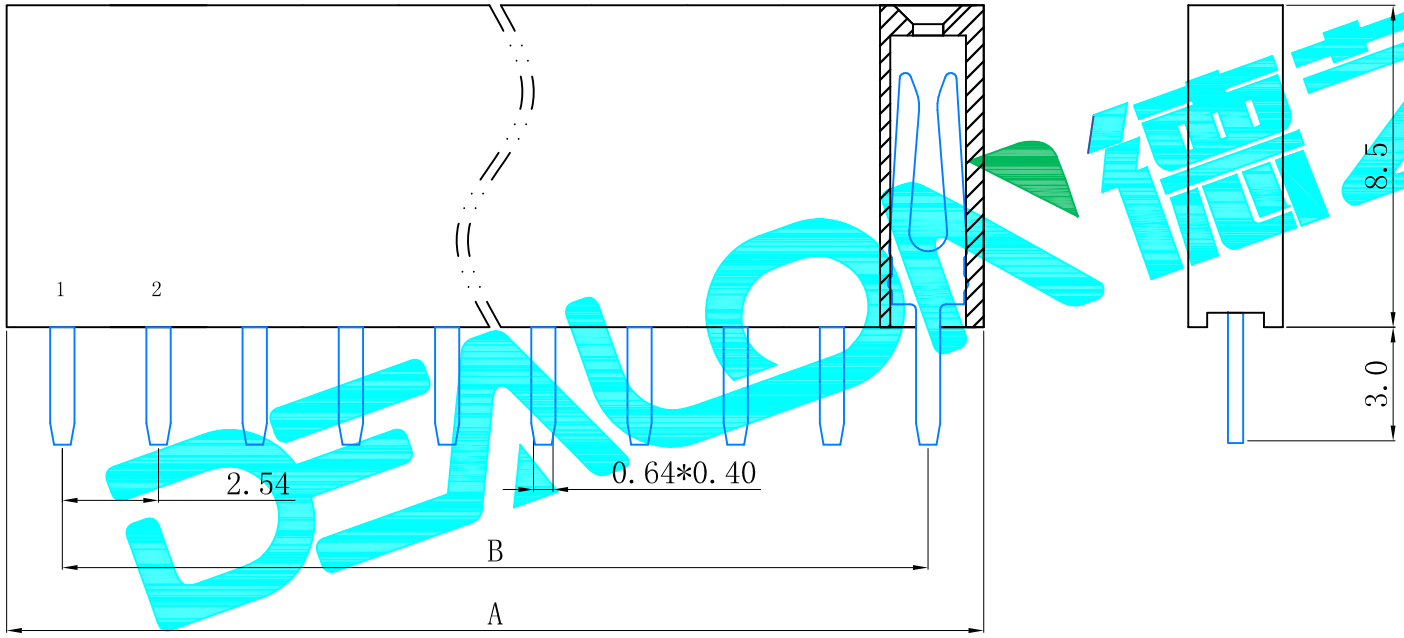

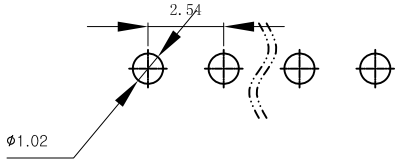

PCB Layout

A=2.54*nP+0.40±0.35
B=2.54*nP-2.54±0.20
Pin Number=1～40

DENLON 德之隆 ELECTRONICS CO.,LTD

							APPROVALS		DATE	DENLON 德之隆® ELECTRONICS CO.,LTD				
							DRAWN	G.M.Chen	2015/7/17					
							CHECKED			TITLE:	CONNECTOR			
							APPROVALS			PART NO.	DW254R-11-XX-85			
———	A	———	NEW	———	———	———	TOLERANCES ARE	30~以上 ±0.30	ANGLE	UNIT: mm	SCALE: 1:1		SHEET 1 OF 1	
								10~30 ±0.20						
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.		5~10 ±0.15	±2°	DRAWING NO.	———		PROJ:	
								~ 5 ±0.10						