

## Features

- Input Voltage Range : 1.2V to 5.5V
- 15 $\mu$ A Ground Current ( $I_Q$ ) at no Load
- PSRR = 75dB at 1kHz
- $\pm 1.5\%$  Output Accuracy
- Low (0.1 $\mu$ A) Shutdown Current
- Dropout Voltage : 0.15V at 300mA when  $V_{OUT} \geq 3V$
- Support Fixed Output Voltage 0.8V, 1.0V, 1.05V, 1.1V, 1.2V, 1.25V, 1.3V, 1.5V, 1.8V, 1.85V, 2V, 2.5V, 2.8V, 2.85V, 3V, 3.1V, 3.3V, 3.45V
- Current Limit Protection
- Over Temperature Protection
- Output Active Discharge Function
- SOT23-5 Packages

## Applications

- CDM/GSM mobile phone
- PDAs /MP3
- Audio/Video equipment


## General Description

This product is a low-dropout (LDO) voltage regulator with enable function that operates from a 1.2V to 5.5V supply. It provides up to 300mA of output current in miniaturized packaging.


The feature of 15 $\mu$ A low quiescent current and 0.5 $\mu$ A shutdown current are ideal for the battery application with long service life. The other features include current limit function, over temperature protection and output discharge function.

## Ordering Information

### TPTLV73333 PDBVR

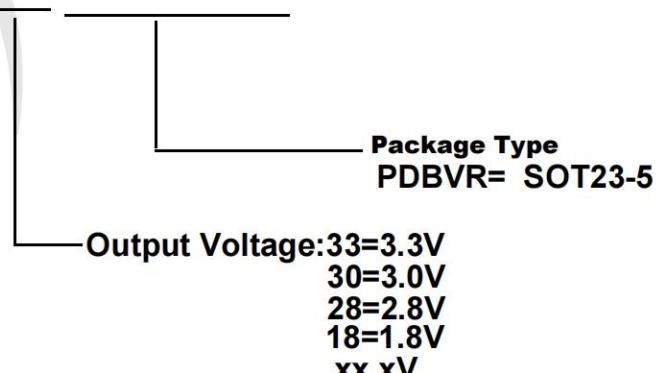


## Pin Configuration

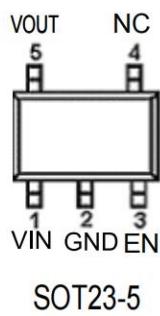

Pin No	Pin Name	Pin Function
1	VIN	Input of Supply Voltage.
2	GND	Ground
3	EN	Enable Control Input.
4	NC	No Internal Connection.
5	VOUT	Output of the Regulator

## BLOCK DIAGRAM

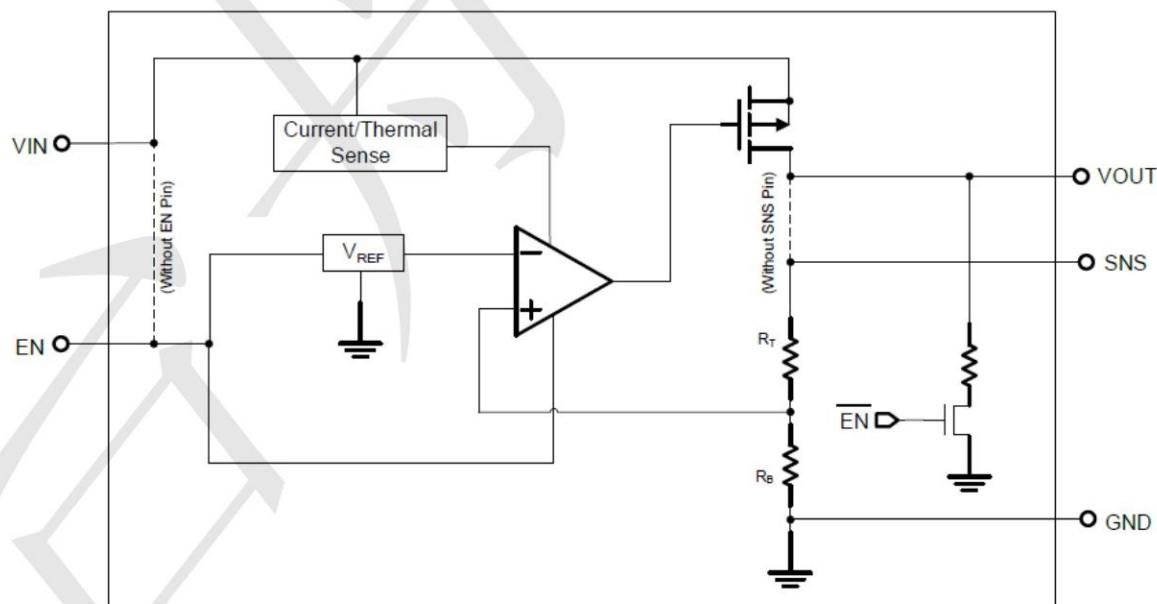

### ABSOLUTE MAXIMUM RATINGS

VIN Pin to GND Pin Voltage .....	-0.3V to 6.5V
VOUT Pin and EN Pin to GND Pin Voltage .....	-0.3V to 6V
VOUT Pin to VIN Pin Voltage .....	-6V to 0.3V
Storage Temperature Range .....	-60°C~150°C
Lead Temperature (Soldering, 10 sec) .....	260°C
Junction Temperature .....	150°C
Operating Ambient Temperature Range TA .....	-40°C~85°C
Thermal Resistance Junction to Case, RθJC	
SOT23-5 .....	115°C/W
Thermal Resistance Junction to Ambient, RθJA	SOT23-5 .....
	250°C/W


### Electrical Characteristics (T = 25°C unless otherwise noted)

(V<sub>OUT</sub> + 1 < V<sub>IN</sub> < 5.5V, T<sub>A</sub> = 25°C, unless otherwise specified)







Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Fixed Output Voltage Range	V <sub>OUT</sub>		0.8	--	3.45	V
DC Output Accuracy		I <sub>LOAD</sub> = 1mA	-2	--	2	%
Dropout Voltage (I <sub>LOAD</sub> = 300mA) (Note 5)	V <sub>DROP</sub>	0.8V ≤ V <sub>OUT</sub> < 1.05V	--	0.7	0.97	V
		1.05V ≤ V <sub>OUT</sub> < 1.2V	--	0.5	0.92	
		1.2V ≤ V <sub>OUT</sub> < 1.5V	--	0.4	0.57	
		1.5V ≤ V <sub>OUT</sub> < 1.8V	--	0.3	0.47	
		1.8V ≤ V <sub>OUT</sub> < 2.1V	--	0.24	0.33	
		2.1V ≤ V <sub>OUT</sub> < 2.5V	--	0.21	0.3	
		2.5V ≤ V <sub>OUT</sub> < 2.8V	--	0.18	0.25	
		2.8V ≤ V <sub>OUT</sub> < 3V	--	0.16	0.23	
		3V ≤ V <sub>OUT</sub>	--	0.15	0.2	
Dropout Voltage (I <sub>LOAD</sub> = 200mA)	V <sub>DROP</sub>	1.8V ≤ V <sub>OUT</sub> < 2.1V	--	0.16	0.2	V
V <sub>CC</sub> Consumption Current	I <sub>Q</sub>	I <sub>LOAD</sub> = 0mA, V <sub>OUT</sub> ≤ 5.5V V <sub>IN</sub> ≥ V <sub>OUT</sub> + V <sub>DROP</sub>	--	15		µA







Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit	
Shutdown GND Current (Note 7)		$V_{EN} = 0V$		--	0.1	0.5	$\mu A$	
Shutdown Leakage Current (Note 7)		$V_{EN} = 0V, V_{OUT} = 0V$		--	0.1	0.5	$\mu A$	
EN Input Current	$I_{EN}$	$V_{EN} = 5.5V$		--	--	0.1	$\mu A$	
Line Regulation	$\Delta_{LINE}$	$I_{LOAD} = 1mA$	1.2V $\leq V_{IN} < 1.5V$	--	0.3	0.6	%	
			1.5V $\leq V_{IN} < 1.8V$	--	0.15	0.3		
			1.8V $\leq V_{IN} \leq 5.5V$	--	0.13	0.35		
Load Regulation	$\Delta_{LOAD}$	$1mA < I_{LOAD} < 300mA$		--	0.5	1	%	
Power Supply Rejection Ratio	PSRR	$V_{IN} = 3V, I_{LOAD} = 50mA, C_{OUT} = 1\mu F, V_{OUT} = 2.5V, f = 1kHz$		--	75	--	dB	
Output Voltage Noise		$C_{OUT} = 1\mu F, I_{LOAD} = 150mA, BW = 10Hz to 100kHz, V_{IN} = V_{OUT} + 1V$	$V_{OUT} = 0.8V$	--	38	--	$\mu V_{RMS}$	
			$V_{OUT} = 1.2V$	--	46	--		
			$V_{OUT} = 1.8V$	--	48	--		
			$V_{OUT} = 3.3V$	--	51	--		
Output Current Limit	$I_{LIM}$	$V_{OUT} = 90\% \text{ of } V_{OUT(NOM)}$		350	600	--	mA	
Enable Threshold Voltage	H-Level	$V_{ENH}$	$V_{IN} = 5V$		0.5	0.7	0.9	V
	L-Level	$V_{ENL}$	$V_{IN} = 5V$		0.4	0.65	0.85	
Thermal Shutdown Temperature	$T_{SD}$	$I_{LOAD} = 30mA, V_{IN} \geq 1.5V$		--	150	--	°C	
Thermal Shutdown Hysteresis	$\Delta T_{SD}$			--	20	--	°C	
Discharge Resistance		$EN = 0V, V_{OUT} = 0.1V$		--	80	--	$\Omega$	







**Typical Application Circuit**

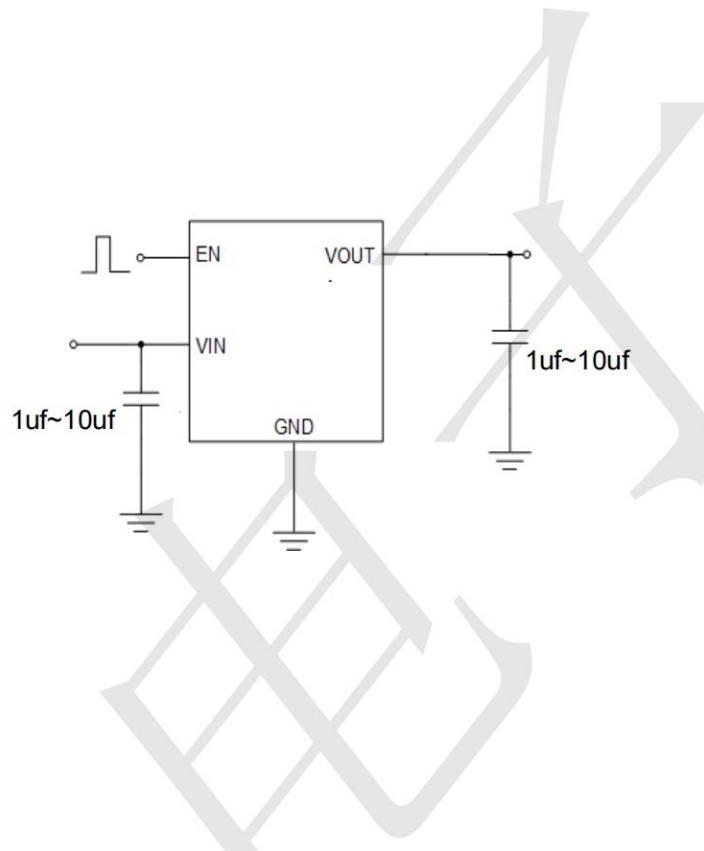


## Typical Operating Characteristics

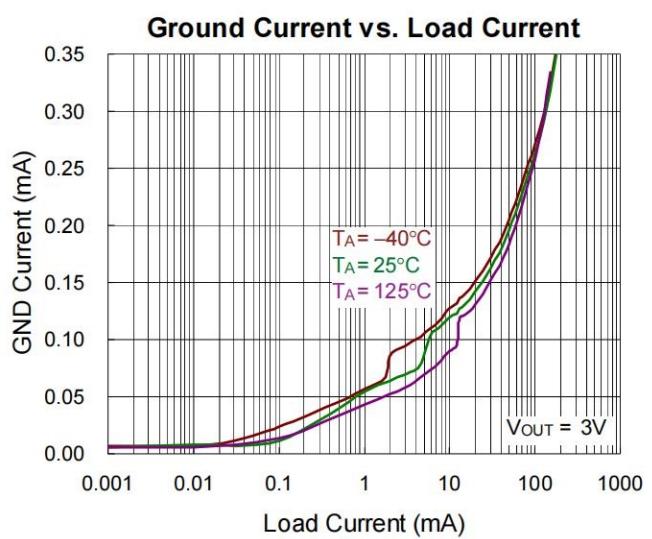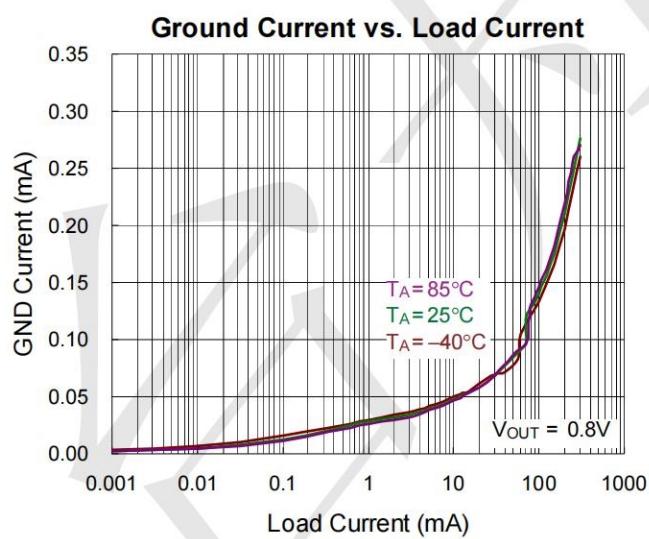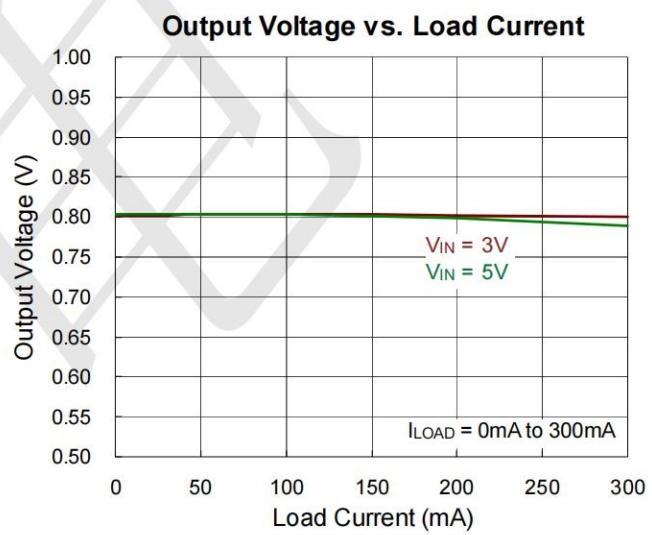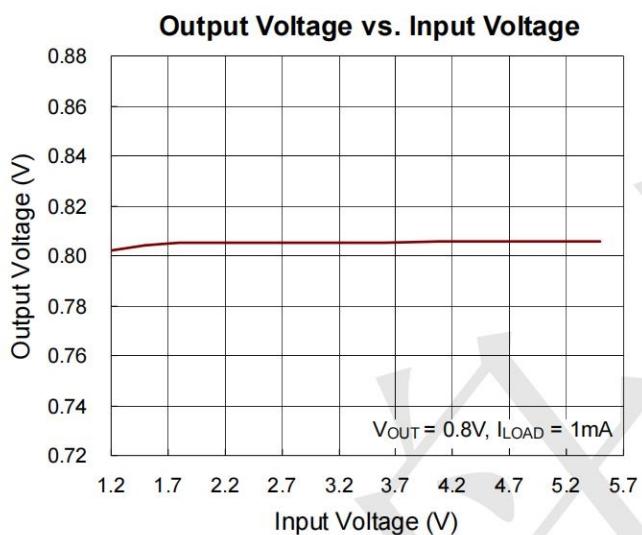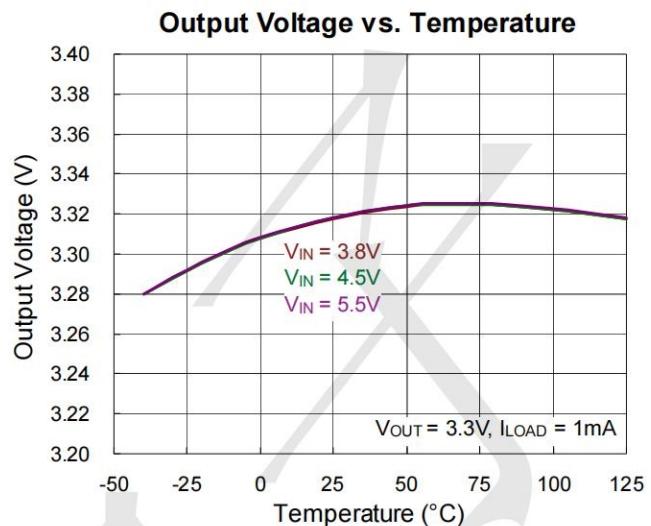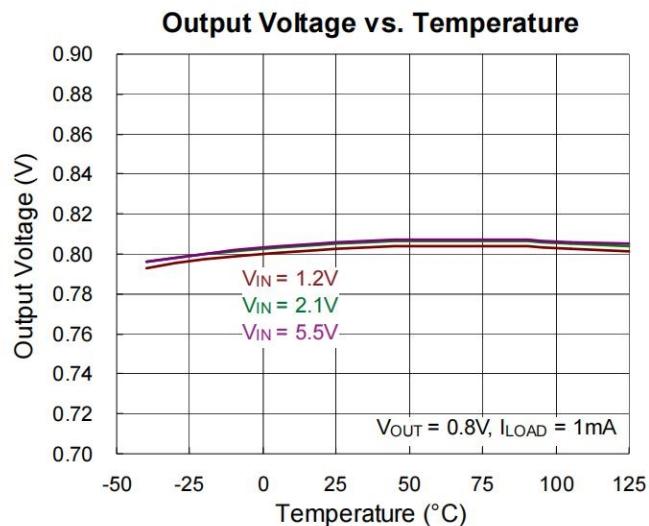

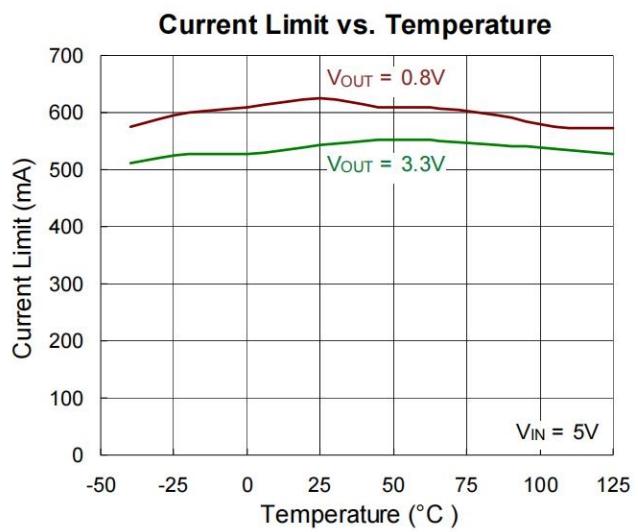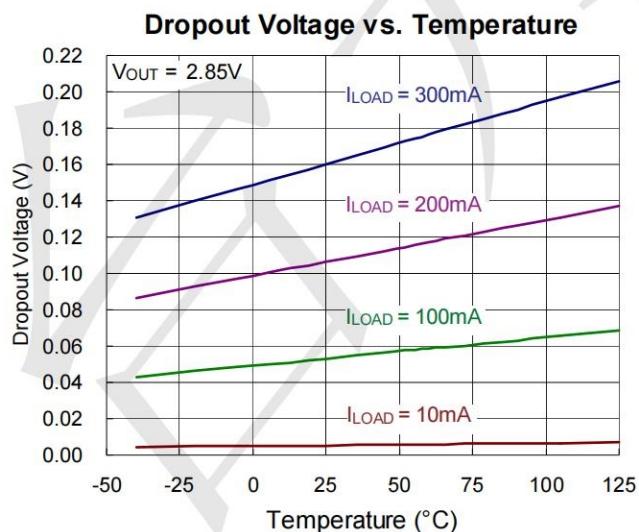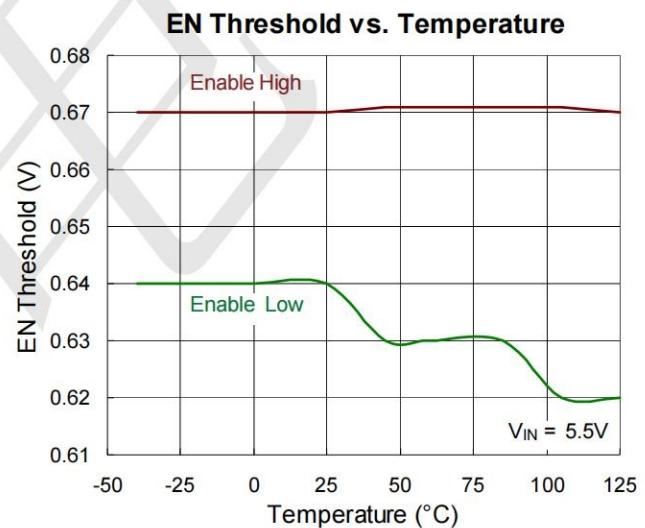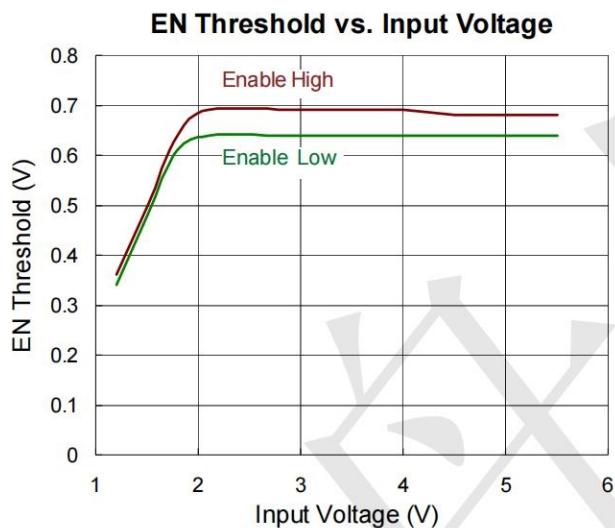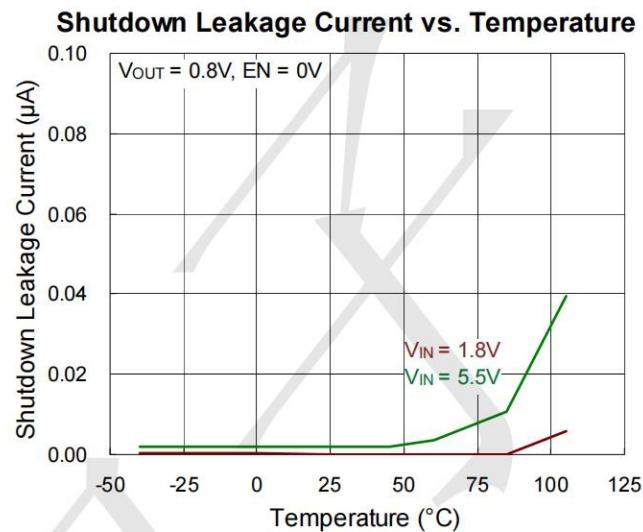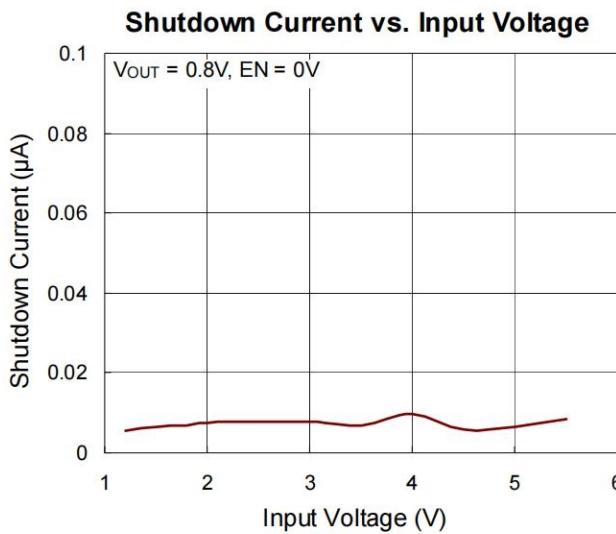


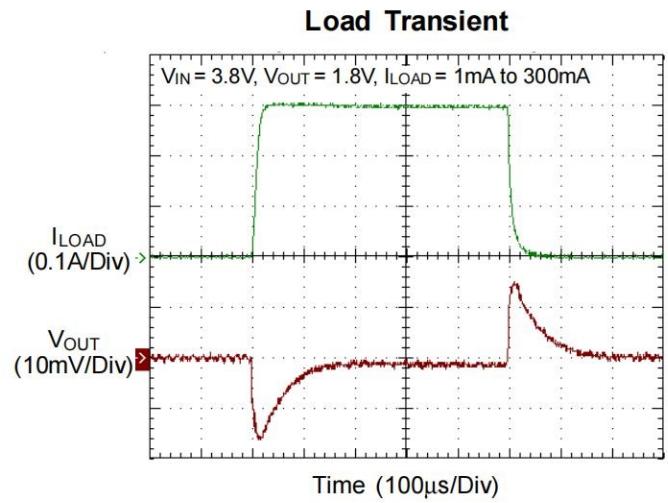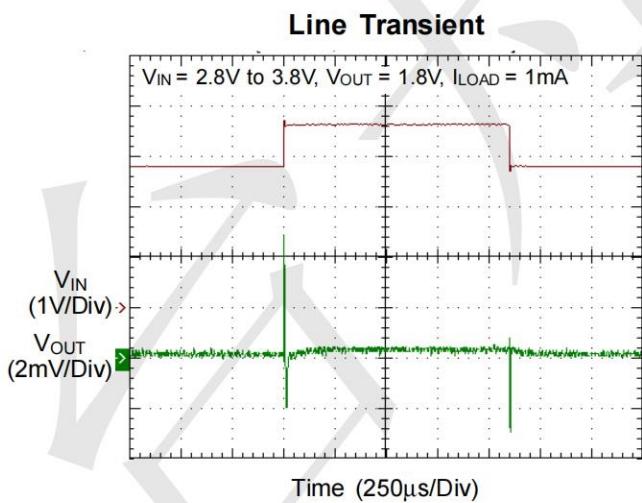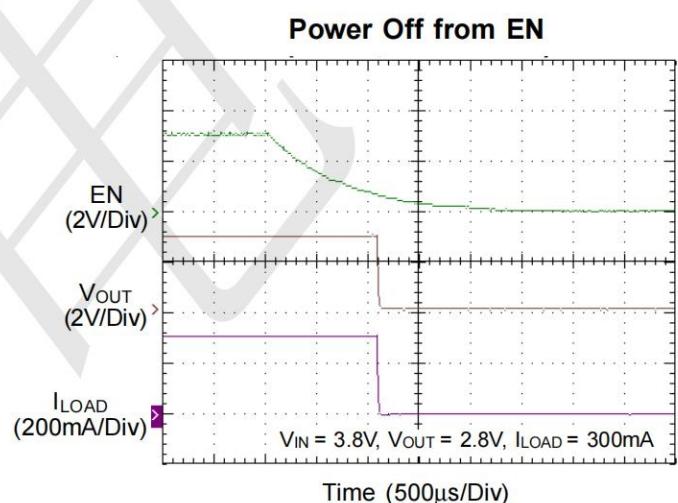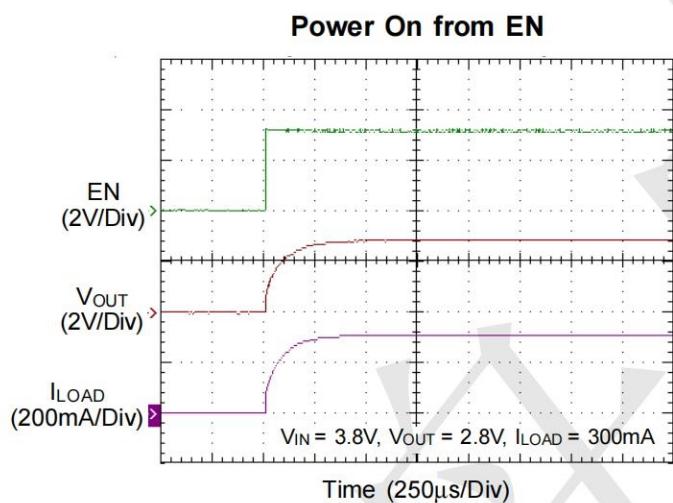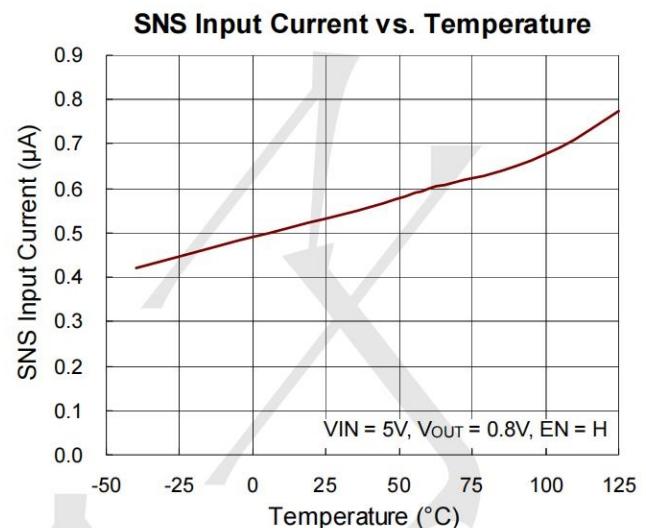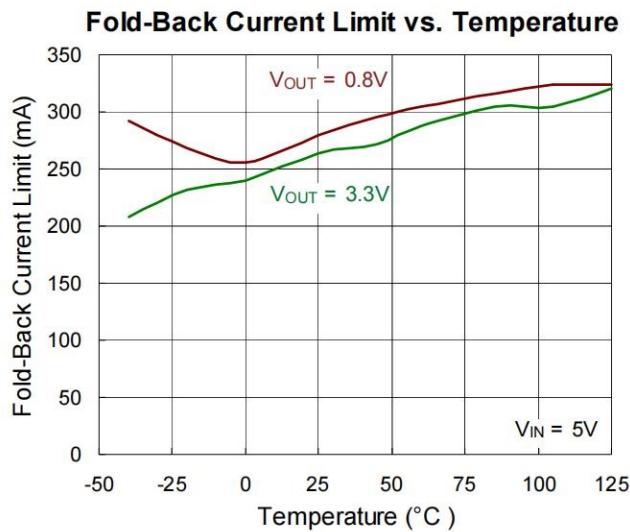


### Output Current Limit Protection

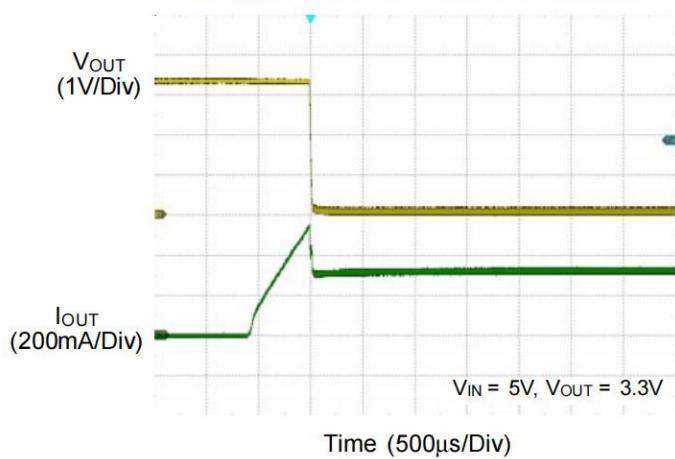


### PSRR vs. Frequency

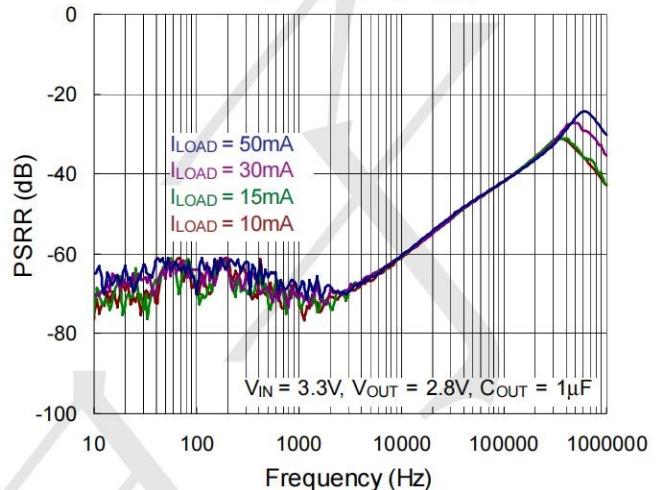

### PSRR vs. Frequency

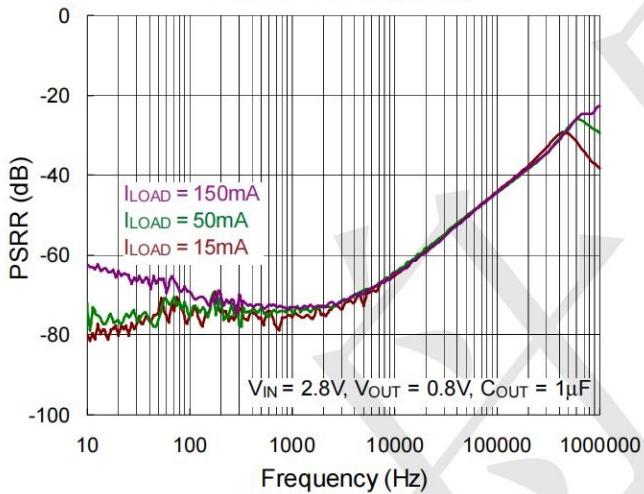


### Output Noise vs. Frequency

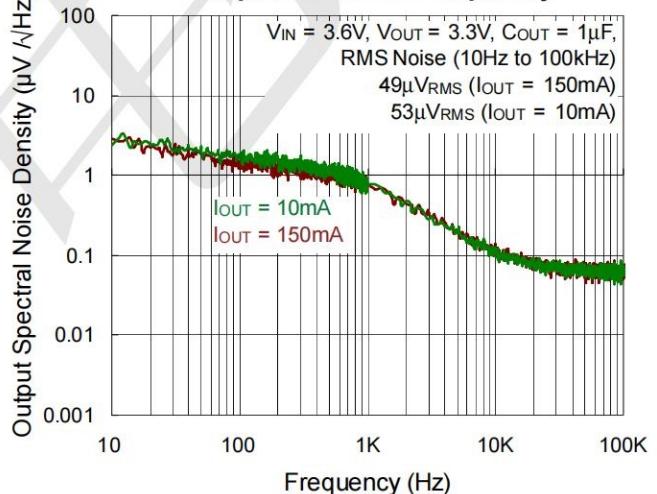

### Package information

SOT23-5

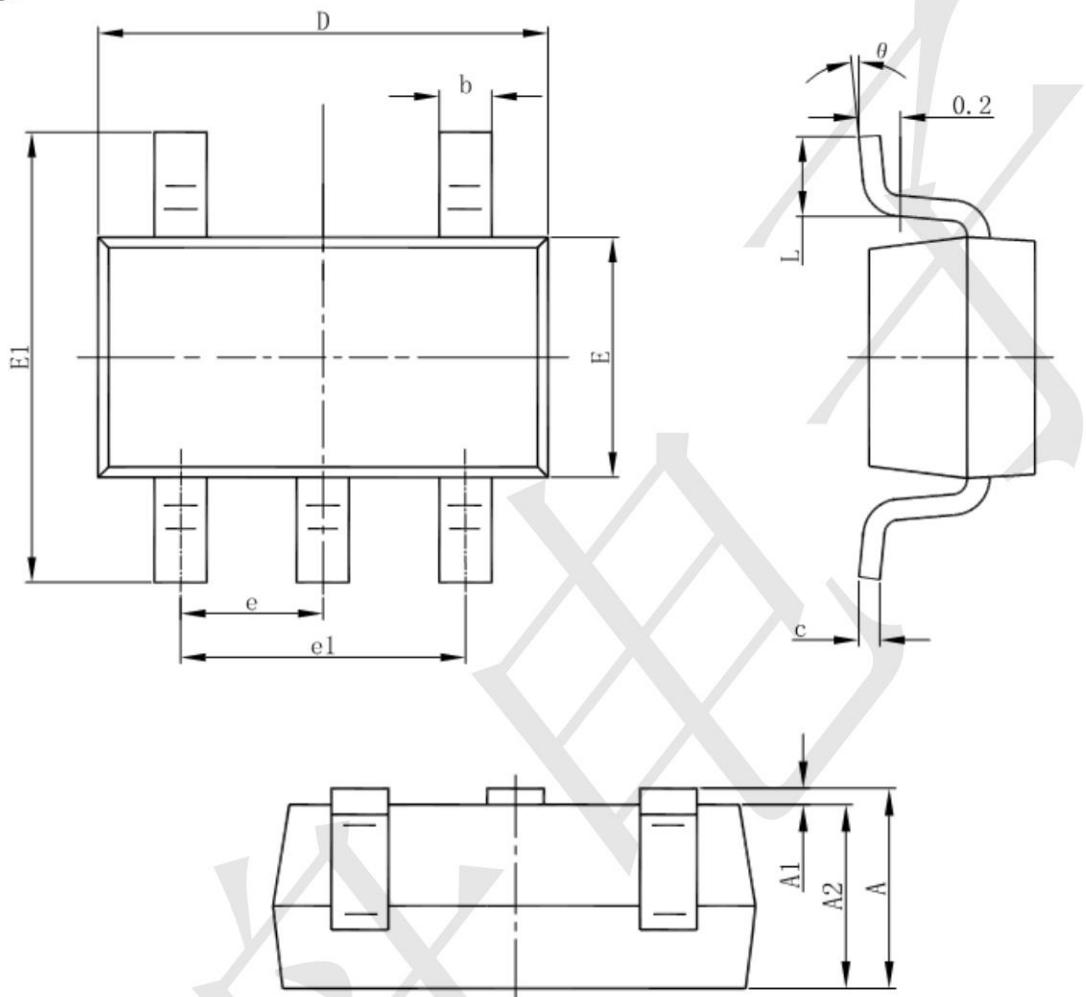

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°