

ESD5Z12V

ESD5Z12V Transient Voltage Suppressors ESD Protection Diode

General description

Silicon Diode in a SOD-523 Plastic Package.

FEATURES

- Stand-off Voltage: 12V
- Low Leakage Current
- Response Time is Typically < 1ns
- IEC61000-4-2 Level 4 ESD Protection
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode


Green Product



SOD-523 Flat Lead

Absolute Maximum Ratings (T_A = 25°C unless otherwise noted)


Symbol	Parameter	Value	Units
PD	Total Power Dissipation on FR-5 Board	150	mW
T _L	Max Lead Solder Temperature range (10 Second Duration)	260	°C
T _{stg}	Storage Temperature Range	-55 to +150	°C
T _J	Junction Temperature	+150	°C
ESD	IEC61000-4-2 Air Discharge	±15	KV
	Contact Discharge	±8	
ESD	Per Human Body Model	16	KV



Device Marking:

Device Type	Marking
ESD5Z12V	ZM

Symbol	Parameter
V _C	Clamping Voltage @ I _{PP}
I _{PP}	Peak Pulse Current
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current
I _R	Reverse Leakage Current @ V _{RWM}
V _{RWM}	Reverse Standoff Voltage
V _F	Forward Voltage @ I _F
I _F	Forward Current

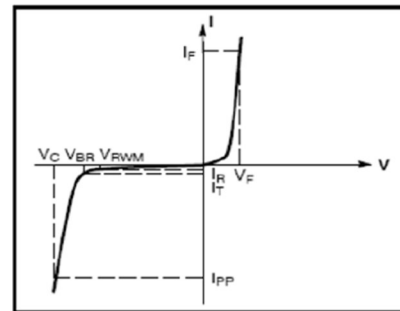

V-I characteristics for a uni-directional TVS

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Device Type	V _{RWM} (Volts)	I _R @ V _{RWM} (µA)	V _{BR} @ I _T (Note 2) (Volts)	I _T (mA)	I _{PP+} (A)	V _C @ Max I _{PP+} (Volts)	P _{PK+} (W)	C @ V _R = 0V, f = 1MHz (pF)
	Max	Max	Min					Max
ESD5Z12V	12	1	13.5	1.0	5	30	95	55

* Surge current waveform per Figure 1.

Note 1: V_{BR} is measured with a pulse test current I_T at an ambient temperature of 25°C.

SURGE CURRENT WAVEFORM:


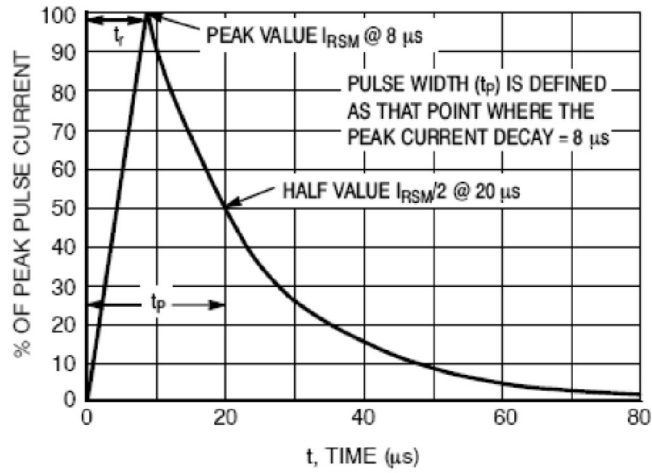


Figure 1. 8 x 20 μs Pulse Waveform

Flat Lead SOD-523 Package Outline

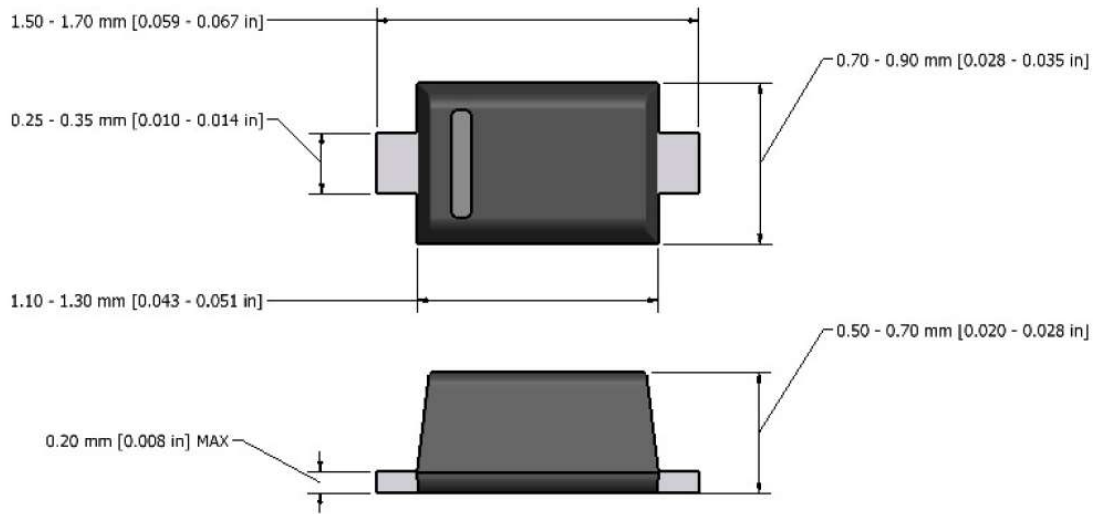

Note: Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.