

# US3A THRU US3M

## US3A THRU US3M 3.0Amp Ultra Fast Surface Mount Rectifiers

### General description

3.0Amp Ultra Fast Surface Mount Rectifiers


### FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- High efficiency
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- Case: SMC
- Terminals: Solderable per MIL-STD-750, Method 2026
- Weight: 0.22g / 0.0077oz

### SMC/DO-214AB

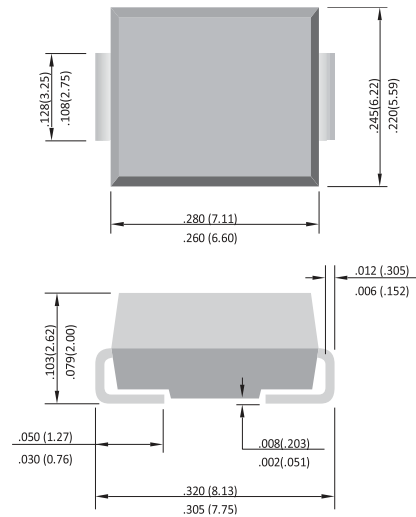

Unit: inch (mm)

### Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbols	US3A	US3B	US3D	US3G	US3J	US3K	US3M	Units
Marking Code	Mark	US3A	US3B	US3D	US3G	US3J	US3K	US3M	N/A
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	$I_{FSM}$	100							A
Maximum Instantaneous Forward Voltage at 1 A	$V_F$	1.0		1.3		1.7		V	
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 100^\circ\text{C}$	$I_R$	5 500							$\mu\text{A}$
Maximum Reverse Recovery Time(Note 1) $T_J=25^\circ\text{C}$	$T_{rr}$	50				75			nS
Typical Junction Capacitance (Note 2)	$C_j$	65							pF
Maximum Thermal Resistance(Note 3) $R_{\theta JA}$	$R_{\theta JA}$	45							$^\circ\text{C/W}$
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150							$^\circ\text{C}$

NOTES: 1. Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$

2. Measured at 1 MHz and applied  $V_r = 4.0$  volts.



# US3A THRU US3M

## Ratings And Characteristic Curves

Fig.1 Maximum Average Forward Current Rating

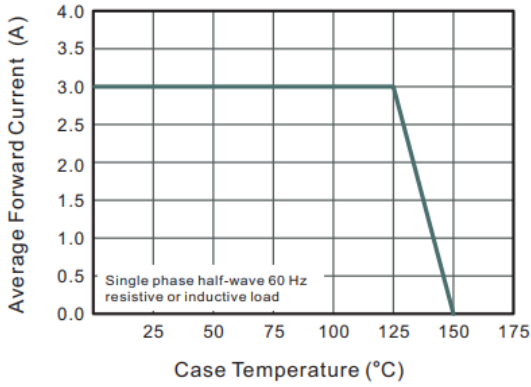


Fig.2 Typical Reverse Characteristics

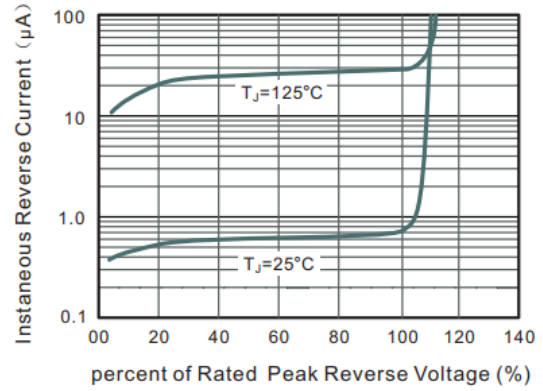


Fig.3 Typical Forward Characteristics


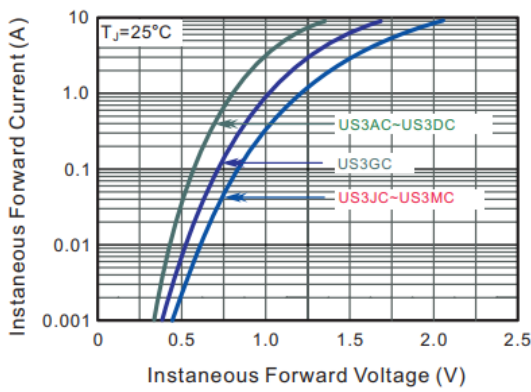


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

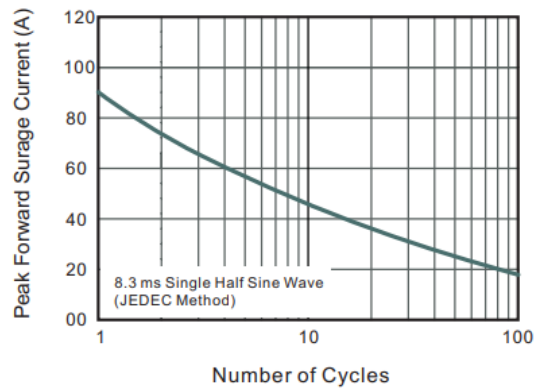

# US3A THRU US3M

## Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.