

SMQ Series

- Downsized from current standard SMG series
- Endurance : 2,000 hours at 85°C
- Non solvent resistant type
- RoHS2 Compliant

SMQ

↑ Downsized
SMG




◆ SPECIFICATIONS

Items	Characteristics															
Category	-40 to +85°C(6.3 to 400V _{dc}) -25 to +85°C(450V _{dc})															
Temperature Range																
Rated Voltage Range	6.3 to 450V _{dc}															
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)															
Leakage Current	6.3 to 100V _{dc}										160 to 450V _{dc}					
	I=0.03CV or 4µA, whichever is greater.															
											CV ≤ 1,000		I=0.1CV+40 max.			
										CV > 1,000		I=0.04CV+100 max.				
Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 1 minute)																
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	315 to 400V	450V				
	tan δ (Max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.09	0.08	0.20	0.24	0.24				
	When nominal capacitance exceeds 1,000µF, add 0.02 to the value above for each 1,000µF increase. (at 20°C, 120Hz)															
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 200V	250V	350V	400V	450V		
	Z(-25°C)/Z(+20°C)	≤ φ8	5	4	3	2	2	2	2	2	3	3	4	4	6	
		≥ φ10	5	4	3	2	2	2	2	2	3	3	4	4	6	
	Z(-40°C)/Z(+20°C)	≤ φ8	12	10	8	5	4	3	3	3	8	10	8	8	—	
	≥ φ10	12	10	8	5	4	3	3	3	4	4	6	6	—		
(at 120Hz)																
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.															
	Capacitance change	≤ ±20% of the initial value														
	D.F. (tan δ)	≤ 200% of the initial specified value														
	Leakage current	≤ The initial specified value														
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.															
	Rated voltage	6.3 to 100V _{dc}							160 to 450V _{dc}							
	Capacitance change	≤ ±20% of the initial value							≤ ±20% of the initial value							
	D.F. (tan δ)	≤ 200% of the initial specified value							≤ 200% of the initial specified value							
	Leakage current	≤ The initial specified value							≤ 500% of the initial specified value							

◆ DIMENSIONS [mm]

- Terminal Code : E

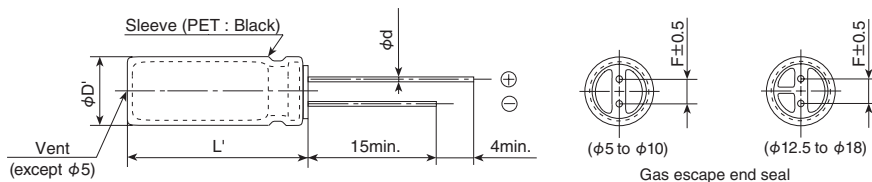

φ D	5	6.3	8	10	12.5	16	18
φ d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φ D'	φD+0.5max.						
L'	L+1.5max.						

◆ PART NUMBERING SYSTEM



Please refer to "Product code guide (radial lead type)"

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current (mAmps/85°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current (mAmps/85°C, 120Hz)	Part No.	
6.3	1,000	8 × 11.5	0.28	540	ESMQ6R3E□□102MHB5D	63	33	6.3 × 11	0.09	140	ESMQ630E□□330MF11D	
	2,200	10 × 16	0.30	890	ESMQ6R3E□□222MJ16S		47	6.3 × 11	0.09	170	ESMQ630E□□470MF11D	
	3,300	10 × 20	0.32	1,190	ESMQ6R3E□□332MJ20S		68	8 × 11.5	0.09	220	ESMQ630E□□680MHB5D	
	4,700	12.5 × 20	0.34	1,550	ESMQ6R3E□□472MK20S		100	8 × 11.5	0.09	280	ESMQ630E□□101MHB5D	
	6,800	12.5 × 25	0.38	1,920	ESMQ6R3E□□682MK25S		220	10 × 16	0.09	490	ESMQ630E□□221MJ16S	
	10,000	16 × 25	0.46	2,350	ESMQ6R3E□□103ML25S		330	10 × 20	0.09	710	ESMQ630E□□331MJ20S	
	15,000	16 × 31.5	0.56	2,550	ESMQ6R3E□□153MLN3S		470	12.5 × 20	0.09	900	ESMQ630E□□471MK20S	
	22,000	18 × 35.5	0.70	3,200	ESMQ6R3E□□223MMP1S		1,000	16 × 25	0.09	1,300	ESMQ630E□□102ML25S	
						2,200	18 × 35.5	0.11	2,300	ESMQ630E□□222MMP1S		
10	220	5 × 11	0.24	240	ESMQ100E□□221ME11D	100	1.0	5 × 11	0.08	21	ESMQ101E□□1R0ME11D	
	330	6.3 × 11	0.24	290	ESMQ100E□□331MF11D		2.2	5 × 11	0.08	30	ESMQ101E□□2R2ME11D	
	470	6.3 × 11	0.24	350	ESMQ100E□□471MF11D		3.3	5 × 11	0.08	40	ESMQ101E□□3R3ME11D	
	1,000	10 × 12.5	0.24	650	ESMQ100E□□102MJC5S		4.7	5 × 11	0.08	45	ESMQ101E□□4R7ME11D	
	2,200	10 × 16	0.26	990	ESMQ100E□□222MJ16S		10	5 × 11	0.08	70	ESMQ101E□□100ME11D	
	3,300	12.5 × 20	0.28	1,450	ESMQ100E□□332MK20S		22	6.3 × 11	0.08	130	ESMQ101E□□220MF11D	
	4,700	12.5 × 25	0.30	1,800	ESMQ100E□□472MK25S		33	8 × 11.5	0.08	180	ESMQ101E□□330MHB5D	
	6,800	16 × 25	0.34	2,250	ESMQ100E□□682ML25S		47	8 × 11.5	0.08	200	ESMQ101E□□470MHB5D	
						68	10 × 12.5	0.08	270	ESMQ101E□□680MJC5S		
						100	10 × 16	0.08	340	ESMQ101E□□101MJ16S		
						220	12.5 × 20	0.08	550	ESMQ101E□□221MK20S		
						330	12.5 × 25	0.08	760	ESMQ101E□□331MK25S		
						470	16 × 25	0.08	1,000	ESMQ101E□□471ML25S		
						1,000	18 × 35.5	0.08	1,350	ESMQ101E□□102MMP1S		
16	220	6.3 × 11	0.20	260	ESMQ160E□□221MF11D	160	10	8 × 11.5	0.20	80	ESMQ161E□□100MHB5D	
	330	6.3 × 11	0.20	320	ESMQ160E□□331MF11D		22	10 × 12.5	0.20	130	ESMQ161E□□220MJC5S	
	470	8 × 11.5	0.20	440	ESMQ160E□□471MHB5D		33	10 × 16	0.20	180	ESMQ161E□□330MJ16S	
	1,000	10 × 12.5	0.20	700	ESMQ160E□□102MJC5S		47	10 × 20	0.20	210	ESMQ161E□□470MJ20S	
	2,200	10 × 20	0.22	1,000	ESMQ160E□□222MJ20S		68	12.5 × 20	0.20	350	ESMQ161E□□680MK20S	
	3,300	12.5 × 25	0.24	1,700	ESMQ160E□□332MK25S		100	12.5 × 25	0.20	430	ESMQ161E□□101MK25S	
	4,700	16 × 25	0.26	2,100	ESMQ160E□□472ML25S		220	16 × 31.5	0.20	760	ESMQ161E□□221MLN3S	
	6,800	16 × 25	0.30	2,250	ESMQ160E□□682ML25S		330	18 × 35.5	0.20	995	ESMQ161E□□331MMP1S	
						470	18 × 40	0.20	1,200	ESMQ161E□□471MM40S		
25	100	5 × 11	0.16	180	ESMQ250E□□101ME11D	200	1.0	6.3 × 11	0.20	22	ESMQ201E□□1R0MF11D	
	220	6.3 × 11	0.16	280	ESMQ250E□□221MF11D		2.2	6.3 × 11	0.20	33	ESMQ201E□□2R2MF11D	
	330	8 × 11.5	0.16	440	ESMQ250E□□331MHB5D		3.3	6.3 × 11	0.20	40	ESMQ201E□□3R3MF11D	
	470	10 × 12.5	0.16	550	ESMQ250E□□471MJC5S		4.7	6.3 × 11	0.20	50	ESMQ201E□□4R7MF11D	
	1,000	10 × 16	0.16	860	ESMQ250E□□102MJ16S		10	8 × 11.5	0.20	80	ESMQ201E□□100MHB5D	
	2,200	12.5 × 25	0.18	1,550	ESMQ250E□□222MK25S		22	10 × 16	0.20	150	ESMQ201E□□220MJ16S	
	3,300	16 × 25	0.20	1,980	ESMQ250E□□332ML25S		33	10 × 20	0.20	205	ESMQ201E□□330MJ20S	
	4,700	16 × 25	0.22	2,200	ESMQ250E□□472ML25S		47	12.5 × 20	0.20	270	ESMQ201E□□470MK20S	
						68	12.5 × 25	0.20	350	ESMQ201E□□680MK25S		
						100	16 × 25	0.20	475	ESMQ201E□□101ML25S		
						220	16 × 35.5	0.20	700	ESMQ201E□□221MLP1S		
						330	18 × 40	0.20	950	ESMQ201E□□331MM40S		
35	47	5 × 11	0.14	130	ESMQ350E□□470ME11D	250	3.3	6.3 × 11	0.20	40	ESMQ251E□□3R3MF11D	
	68	6.3 × 11	0.14	160	ESMQ350E□□680MF11D		4.7	6.3 × 11	0.20	50	ESMQ251E□□4R7MF11D	
	100	6.3 × 11	0.14	210	ESMQ350E□□101MF11D		10	10 × 12.5	0.20	100	ESMQ251E□□3R3MJC5S	
	220	8 × 11.5	0.14	385	ESMQ350E□□221MHB5D		22	10 × 20	0.20	170	ESMQ251E□□220MJ20S	
	330	10 × 12.5	0.14	490	ESMQ350E□□331MJC5S		33	10 × 20	0.20	200	ESMQ251E□□330MJ20S	
	470	10 × 16	0.14	650	ESMQ350E□□471MJ16S		47	12.5 × 20	0.20	270	ESMQ251E□□470MK20S	
	1,000	12.5 × 20	0.14	1,150	ESMQ350E□□102MK20S		68	16 × 25	0.20	380	ESMQ251E□□680ML25S	
	2,200	16 × 25	0.16	1,800	ESMQ350E□□222ML25S		100	16 × 25	0.20	440	ESMQ251E□□101ML25S	
						220	18 × 35.5	0.20	680	ESMQ251E□□221MMP1S		
50	1.0	5 × 11	0.12	17	ESMQ500E□□1R0ME11D	350	2.2	6.3 × 11	0.24	30	ESMQ351E□□2R2MF11D	
	2.2	5 × 11	0.12	28	ESMQ500E□□2R2ME11D		3.3	8 × 11.5	0.24	46	ESMQ351E□□3R3MHB5D	
	3.3	5 × 11	0.12	35	ESMQ500E□□3R3ME11D		4.7	8 × 11.5	0.24	55	ESMQ351E□□4R7MHB5D	
	4.7	5 × 11	0.12	41	ESMQ500E□□4R7ME11D		10	10 × 12.5	0.24	90	ESMQ351E□□100MJC5S	
	10	5 × 11	0.12	60	ESMQ500E□□100ME11D		22	12.5 × 20	0.24	185	ESMQ351E□□220MK20S	
	22	5 × 11	0.12	95	ESMQ500E□□220ME11D		33	12.5 × 25	0.24	240	ESMQ351E□□330MK25S	
	33	5 × 11	0.12	125	ESMQ500E□□330ME11D		47	16 × 25	0.24	325	ESMQ351E□□470ML25S	
	47	6.3 × 11	0.12	155	ESMQ500E□□470MF11D		68	16 × 25	0.24	400	ESMQ351E□□680ML25S	
	68	6.3 × 11	0.12	210	ESMQ500E□□680MF11D		100	18 × 31.5	0.24	530	ESMQ351E□□101MMN3S	
	100	8 × 11.5	0.12	260	ESMQ500E□□101MHB5D							
	220	10 × 12.5	0.12	430	ESMQ500E□□221MJC5S							
	330	10 × 16	0.12	590	ESMQ500E□□331MJ16S							
470	10 × 20	0.12	760	ESMQ500E□□471MJ20S								
63	1,000	12.5 × 25	0.12	1,350	ESMQ500E□□102MK25S	400	1.0	6.3 × 11	0.24	22	ESMQ401E□□1R0MF11D	
	2,200	16 × 31.5	0.14	1,980	ESMQ500E□□222MLN3S		2.2	8 × 11.5	0.24	38	ESMQ401E□□2R2MHB5D	
	3,300	18 × 35.5	0.16	2,500	ESMQ500E□□332MMP1S		3.3	8 × 11.5	0.24	48	ESMQ401E□□3R3MHB5D	
	22	5 × 11	0.09	100	ESMQ630E□□220ME11D		4.7	10 × 12.5	0.24	60	ESMQ401E□□4R7MJC5S	
						10	10 × 16	0.24	90	ESMQ401E□□100MJ16S		

□ □ : Enter the appropriate lead forming or taping code.

◆ STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current (mA _{rms} /85°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current (mA _{rms} /85°C, 120Hz)	Part No.
400	22	12.5 × 25	0.24	205	ESMQ401E□□220MK25S	450	4.7	10 × 12.5	0.24	46	ESMQ451E□□4R7MJC5S
	33	16 × 25	0.24	275	ESMQ401E□□330ML25S		10	10 × 20	0.24	80	ESMQ451E□□100MJ20S
	47	16 × 25	0.24	280	ESMQ401E□□470ML25S		22	12.5 × 25	0.24	140	ESMQ451E□□220MK25S
	68	16 × 31.5	0.24	340	ESMQ401E□□680MLN3S		33	16 × 25	0.24	180	ESMQ451E□□330ML25S
	100	18 × 35.5	0.24	440	ESMQ401E□□101MMP1S		47	16 × 31.5	0.24	220	ESMQ451E□□470MLN3S
450	2.2	8 × 11.5	0.24	28	ESMQ451E□□2R2MHB5D		68	18 × 35.5	0.24	260	ESMQ451E□□680MMP1S
	3.3	10 × 12.5	0.24	40	ESMQ451E□□3R3MJC5S		100	18 × 40	0.24	280	ESMQ451E□□101MM40S

□□ : Enter the appropriate lead forming or taping code.

◆ RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

Capacitance(μF)	Frequency(Hz)	50	120	300	1k	10k	100k
1.0 to 4.7		0.65	1.00	1.35	1.75	2.30	2.50
10 to 68		0.75	1.00	1.25	1.50	1.75	1.80
100 to 1,000		0.80	1.00	1.15	1.30	1.40	1.50
2,200 to		0.85	1.00	1.03	1.05	1.08	1.08

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.