

N-Channel MOSFET

Features


- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- Green Device Available

Application


- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

Product Summary


V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
30V	16m Ω @10V	8.5A
	23m Ω @4.5V	



SOP-8 top view

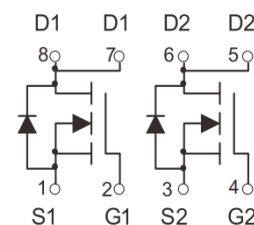

Schematic diagram

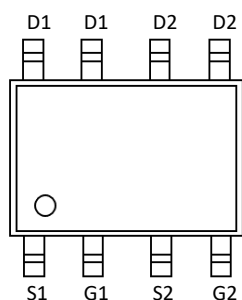

Marking and pin assignment



Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	30	V
V_{GS}	Gate-Source Voltage	± 20	V
T_J	Maximum Junction Temperature	150	$^{\circ}C$
T_{STG}	Storage Temperature Range	-55 to 150	$^{\circ}C$
I_S	Diode Continuous Forward Current	$T_c=25^{\circ}C$ 8	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_c=25^{\circ}C$ 30	A
I_D	Continuous Drain Current@GS=10V	$T_c=25^{\circ}C$ 8.5	A
P_D	Maximum Power Dissipation	$T_c=25^{\circ}C$ 1.4	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient>(*1 in2 Pad of 2-oz Copper), Max.)	89	$^{\circ}C/W$

Electrical Characteristics (T_J=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
B _{V(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =30V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1	1.5	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =8A	--	11.5	16	mΩ
		V _{GS} =4.5V, I _D =6A	--	18	23	
Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =15V, V _{GS} =0V, f=1MHz	--	--	1250	pF
C _{OSS}	Output Capacitance		--	180	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	110	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =15V, I _D =8A, V _{GS} =10V	--	15	--	nC
Q _{gs}	Gate Source Charge		--	2.5	--	nC
Q _{gd}	Gate Drain Charge		--	3	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DS} =15V, R _L =1.8Ω, V _{GS} =10V, R _G =3Ω	--	5	--	nS
t _r	Turn-on Rise Time		--	3.5	--	nS
t _{d(off)}	Turn-Off Delay Time		--	19	--	nS
t _f	Turn-Off Fall Time		--	3.5	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	T _J =25°C, I _S =1A,	--	--	1.2	V

Typical Operating Characteristics

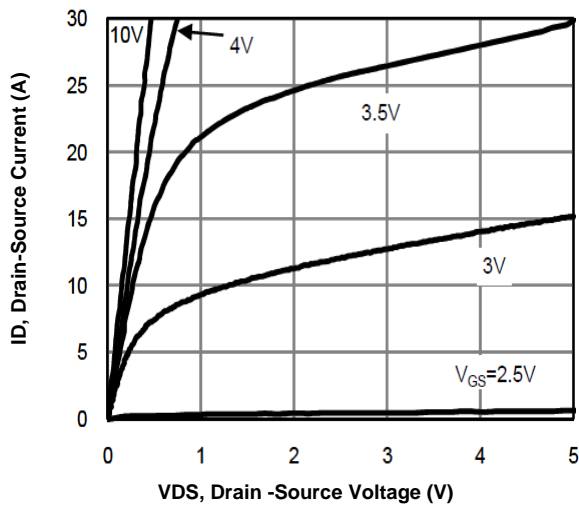


Fig1. Typical Output Characteristics

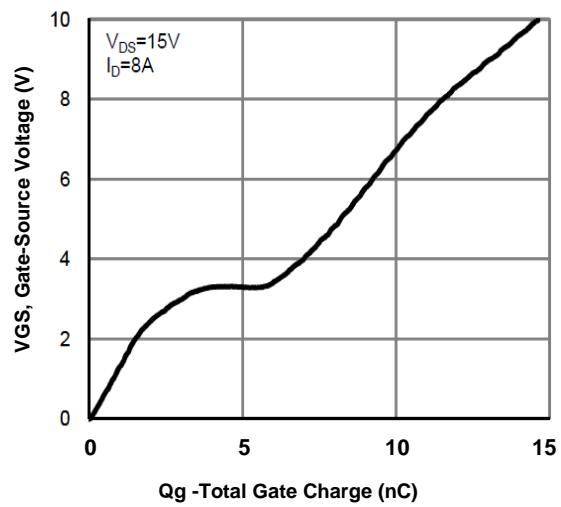


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

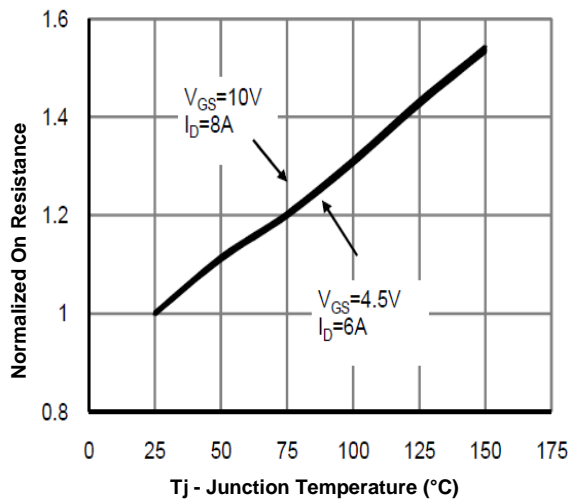


Fig3. Normalized On-Resistance Vs. Temperature

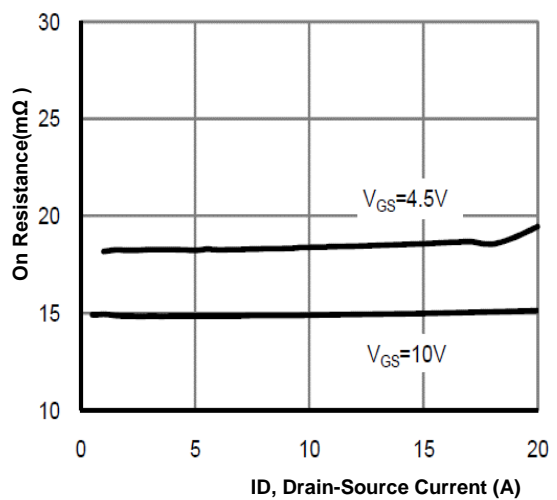


Fig4. On-Resistance Vs. Drain-Source Current

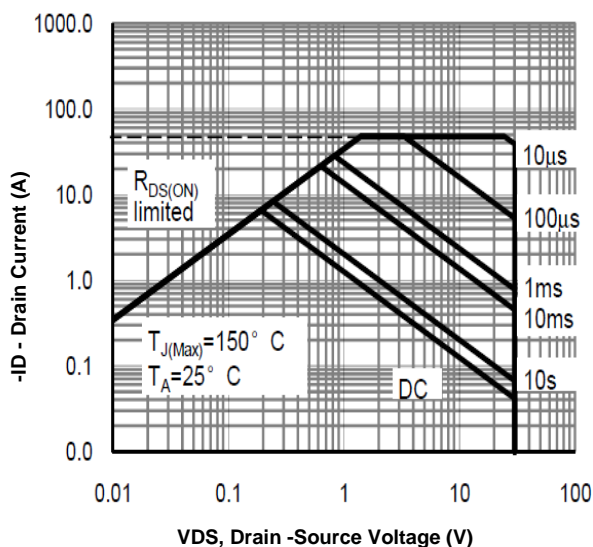


Fig7. Maximum Safe Operating Area



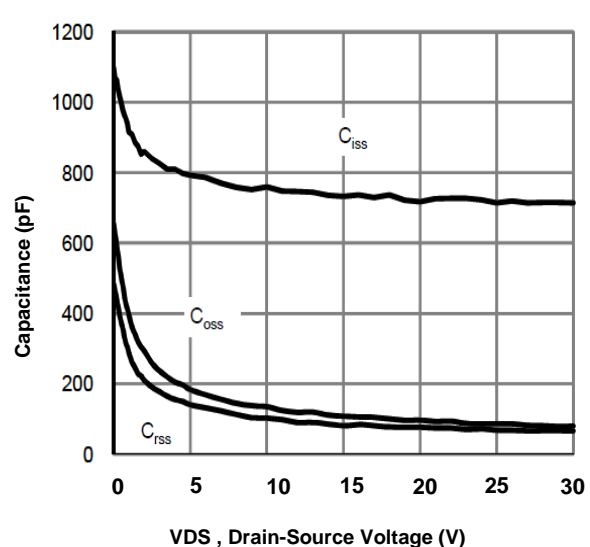


Fig6. Typical Capacitance Vs. Drain-Source Voltage

SOP-8 Package information

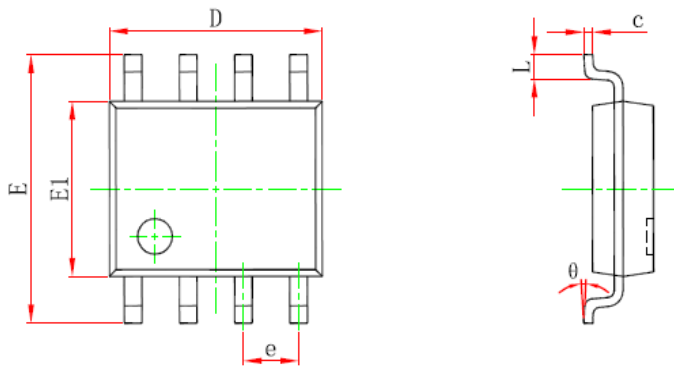

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.450	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
e	1.270 (BSC)		0.050 (BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°