

600W, 6.8V - 220V Surface Mount Transient Voltage Suppressor

FEATURES FEATURES

- Low profile package
- Ideal for automated placement
- Glass passivated junction
- Built-in strain relief
- Excellent clamping capability
- Typical I_R less than $1\mu A$ above 10V
- Fast response time: Typically less than 1.0ps from 0 volt to BV min
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- TV
- Monitor

MECHANICAL DATA

- Case: DO-214AA (SMB)
- Molding compound meets UL 94V-0 flammability rating
- Moisture sensitivity level: level 1, per J-STD-020
- Part no. with suffix "H" means AEC-Q101 qualified
- Packing code with suffix "G" means green compound (halogen-free)
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
Weight: 0.09 g (approximately)

| KEY PARAMETERS | | |
|----------------------------|----------------|------|
| PARAMETER | VALUE | UNIT |
| V_{WM} | 5.5 - 185 | V |
| V_{BR} (uni-directional) | 6.8 - 220 | V |
| P_{PPSM} | 600 | W |
| T_{JMAX} | 150 | °C |
| Package | DO-214AA (SMB) | |
| Configuration | Single die | |


DO-214AA (SMB)

| ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ unless otherwise noted) | | | |
|---|------------|-------------|------|
| PARAMETER | SYMBOL | PART NUMBER | UNIT |
| Non-repetitive peak impulse power dissipation with 10/1000 μs waveform | P_{PPSM} | 600 | W |
| Steady state power dissipation at $T_A = 25^\circ C$ ⁽¹⁾ | P_{tot} | 3 | W |
| Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load | I_{FSM} | 100 | A |
| Forward Voltage @ $I_F = 50A$ for Uni-directional only ⁽²⁾ | V_F | 3.5/5.0 | V |
| Junction temperature | T_J | -55 to +150 | °C |
| Storage temperature | T_{STG} | -55 to +150 | °C |

Notes:

1. Non-repetitive Current Pulse Per Fig. 3 and Derated above $T_A = 25^\circ C$ Per Fig. 2
2. $V_F = 3.5V$ on P6SMB6.8 - P6SMB91 Devices and $V_F = 5.0V$ on P6SMB100 - P6SMB220 Device.

Devices for Bipolar Applications

1. For bidirectional use C or CA suffix for types P6SMB6.8 - types P6SMB220A
2. Electrical characteristics apply in both directions

THERMAL PERFORMANCE

| PARAMETER | SYMBOL | LIMIT | UNIT |
|--|-----------------|-------|---------------|
| Junction-to-case thermal resistance | $R_{\theta JC}$ | 10 | $^{\circ}C/W$ |
| Junction-to-ambient thermal resistance | $R_{\theta JA}$ | 55 | $^{\circ}C/W$ |

ELECTRICAL SPECIFICATIONS ($T_A = 25^{\circ}C$ unless otherwise noted)

| Device | Device Marking Code | Breakdown voltage V_{BR} (V) (Note 1) | | Test Current I_T (mA) | Stand-Off Voltage @ V_{WM} (V) | Maximum Reverse Leakage @ V_{WM} I_D (μA) | Maximum Peak Pulse Current I_{PPM} (A) (Note 2) | Maximum clamping voltage V_C @ I_{PP} (V) | Maximum Temperature Coefficient of V_{BR} (%/ $^{\circ}C$) |
|-----------|---------------------|--|-------|-------------------------|----------------------------------|--|--|---|---|
| | | Min. | Max. | | | | | | |
| P6SMB6.8 | KDJ | 6.12 | 7.48 | 10 | 5.50 | 1000 | 58 | 10.8 | 0.057 |
| P6SMB6.8A | KEJ | 6.46 | 7.14 | 10 | 5.80 | 1000 | 60 | 10.5 | 0.057 |
| P6SMB7.5 | KFJ | 6.75 | 8.25 | 10 | 6.05 | 500 | 53 | 11.7 | 0.061 |
| P6SMB7.5A | KGJ | 7.13 | 7.88 | 10 | 6.40 | 500 | 55 | 11.3 | 0.061 |
| P6SMB8.2 | KHJ | 7.38 | 9.02 | 10 | 6.63 | 200 | 50 | 12.5 | 0.065 |
| P6SMB8.2A | KKJ | 7.79 | 8.61 | 10 | 7.02 | 200 | 52 | 12.1 | 0.065 |
| P6SMB9.1 | KLJ | 8.19 | 10.00 | 1.0 | 7.37 | 50 | 45 | 13.8 | 0.068 |
| P6SMB9.1A | KMJ | 8.65 | 9.55 | 1.0 | 7.78 | 50 | 47 | 13.4 | 0.068 |
| P6SMB10 | KNJ | 9.00 | 11.00 | 1.0 | 8.10 | 10 | 42 | 15.0 | 0.073 |
| P6SMB10A | KPJ | 9.50 | 10.5 | 1.0 | 8.55 | 10 | 43 | 14.5 | 0.073 |
| P6SMB11 | KQJ | 9.90 | 12.1 | 1.0 | 8.92 | 1 | 38 | 16.2 | 0.075 |
| P6SMB11A | KRJ | 10.5 | 11.6 | 1.0 | 9.40 | 1 | 40 | 15.6 | 0.075 |
| P6SMB12 | KSJ | 10.8 | 13.2 | 1.0 | 9.72 | 1 | 36 | 17.3 | 0.078 |
| P6SMB12A | KTJ | 11.4 | 12.6 | 1.0 | 10.2 | 1 | 37 | 16.7 | 0.078 |
| P6SMB13 | KUJ | 11.7 | 14.3 | 1.0 | 10.5 | 1 | 33 | 19.0 | 0.081 |
| P6SMB13A | KVJ | 12.4 | 13.7 | 1.0 | 11.1 | 1 | 34 | 18.2 | 0.081 |
| P6SMB15 | KWJ | 13.5 | 16.5 | 1.0 | 12.1 | 1 | 28 | 22.0 | 0.084 |
| P6SMB15A | KXJ | 14.3 | 15.8 | 1.0 | 12.8 | 1 | 29 | 21.2 | 0.084 |
| P6SMB16 | KYJ | 14.4 | 17.6 | 1.0 | 12.9 | 1 | 26 | 23.5 | 0.086 |
| P6SMB16A | KZJ | 15.2 | 16.8 | 1.0 | 13.6 | 1 | 28 | 22.5 | 0.086 |
| P6SMB18 | LDJ | 16.2 | 19.8 | 1.0 | 14.5 | 1 | 23 | 26.5 | 0.088 |
| P6SMB18A | LEJ | 17.1 | 18.9 | 1.0 | 15.3 | 1 | 25 | 25.5 | 0.088 |
| P6SMB20 | LFJ | 18.0 | 22.0 | 1.0 | 16.2 | 1 | 21 | 29.1 | 0.090 |
| P6SMB20A | LGJ | 19.0 | 21.0 | 1.0 | 17.1 | 1 | 22 | 27.7 | 0.090 |
| P6SMB22 | LHJ | 19.8 | 24.2 | 1.0 | 17.8 | 1 | 19 | 31.9 | 0.092 |
| P6SMB22A | LKJ | 20.9 | 23.1 | 1.0 | 18.8 | 1 | 20 | 30.6 | 0.092 |
| P6SMB24 | LLJ | 21.6 | 26.4 | 1.0 | 19.4 | 1 | 18 | 34.7 | 0.094 |
| P6SMB24A | LMJ | 22.8 | 25.2 | 1.0 | 20.5 | 1 | 19 | 33.2 | 0.094 |
| P6SMB27 | LNJ | 24.3 | 29.7 | 1.0 | 21.8 | 1 | 16 | 39.1 | 0.096 |
| P6SMB27A | LPJ | 25.7 | 28.4 | 1.0 | 23.1 | 1 | 16.8 | 37.5 | 0.096 |
| P6SMB30 | LQJ | 27.0 | 33.0 | 1.0 | 24.3 | 1 | 14.0 | 43.5 | 0.097 |
| P6SMB30A | LRJ | 28.5 | 31.5 | 1.0 | 25.6 | 1 | 15.0 | 41.4 | 0.097 |
| P6SMB33 | LSJ | 29.7 | 36.3 | 1.0 | 26.8 | 1 | 13.0 | 47.7 | 0.098 |
| P6SMB33A | LTJ | 31.4 | 34.7 | 1.0 | 28.2 | 1 | 13.8 | 45.7 | 0.098 |
| P6SMB36 | LUJ | 32.4 | 39.6 | 1.0 | 29.1 | 1 | 12.0 | 52.0 | 0.099 |
| P6SMB36A | LVJ | 34.2 | 37.8 | 1.0 | 30.8 | 1 | 12.6 | 49.9 | 0.099 |
| P6SMB39 | LWJ | 35.1 | 42.9 | 1.0 | 31.6 | 1 | 11.1 | 56.4 | 0.100 |
| P6SMB39A | LXJ | 37.1 | 41.0 | 1.0 | 33.3 | 1 | 11.6 | 53.9 | 0.100 |
| P6SMB43 | LYJ | 38.7 | 47.3 | 1.0 | 34.8 | 1 | 10.0 | 61.9 | 0.101 |
| P6SMB43A | LZJ | 40.9 | 45.2 | 1.0 | 36.8 | 1 | 10.6 | 59.3 | 0.101 |
| P6SMB47 | MDJ | 42.3 | 51.7 | 1.0 | 38.1 | 1 | 9.2 | 67.8 | 0.101 |
| P6SMB47A | MEJ | 44.7 | 49.4 | 1.0 | 40.2 | 1 | 9.7 | 64.8 | 0.101 |
| P6SMB51 | MFJ | 45.9 | 56.1 | 1.0 | 41.3 | 1 | 8.5 | 73.5 | 0.102 |

ELECTRICAL SPECIFICATIONS (T_A = 25°C unless otherwise noted)

| Device | Device Marking Code | Breakdown voltage V _{BR} (V) (Note 1) | | Test Current I _T (mA) | Stand-Off Voltage @V _{WM} (V) | Maximum Reverse Leakage @V _{WM} I _D (μA) | Maximum Peak Pulse Current I _{PPM} (A) (Note 2) | Maximum clamping voltage V _{C@I_{PP}} (V) | Maximum Temperature Coefficient of V _{BR} (%/°C) |
|-----------|---------------------|---|------|----------------------------------|--|--|---|--|---|
| | | Min. | Max. | | | | | | |
| P6SMB51A | MGJ | 48.5 | 53.6 | 1.0 | 43.6 | 1 | 8.9 | 70.1 | 0.102 |
| P6SMB56 | MHJ | 50.4 | 61.6 | 1.0 | 45.4 | 1 | 7.8 | 80.5 | 0.103 |
| P6SMB56A | MKJ | 53.2 | 58.8 | 1.0 | 47.8 | 1 | 8.1 | 77.0 | 0.103 |
| P6SMB62 | MLJ | 55.8 | 68.2 | 1.0 | 50.2 | 1 | 7.0 | 89.0 | 0.104 |
| P6SMB62A | MMJ | 58.9 | 65.1 | 1.0 | 53.0 | 1 | 7.4 | 85.0 | 0.104 |
| P6SMB68 | MNJ | 61.2 | 74.8 | 1.0 | 55.1 | 1 | 6.4 | 98.0 | 0.104 |
| P6SMB68A | MPJ | 64.6 | 71.4 | 1.0 | 58.1 | 1 | 6.8 | 92.0 | 0.104 |
| P6SMB75 | MQJ | 67.5 | 82.5 | 1.0 | 60.7 | 1 | 5.8 | 108 | 0.105 |
| P6SMB75A | MRJ | 71.3 | 78.8 | 1.0 | 64.1 | 1 | 6.1 | 103 | 0.105 |
| P6SMB82 | MSJ | 73.8 | 90.2 | 1.0 | 66.4 | 1 | 5.3 | 118 | 0.105 |
| P6SMB82A | MTJ | 77.9 | 86.1 | 1.0 | 70.1 | 1 | 5.5 | 113 | 0.105 |
| P6SMB91 | MUJ | 81.9 | 100 | 1.0 | 73.7 | 1 | 4.8 | 131 | 0.106 |
| P6SMB91A | MVJ | 86.5 | 95.5 | 1.0 | 77.8 | 1 | 5.0 | 125 | 0.106 |
| P6SMB100 | MWJ | 90 | 110 | 1.0 | 81.0 | 1 | 4.3 | 144 | 0.106 |
| P6SMB100A | MXJ | 95 | 105 | 1.0 | 85.5 | 1 | 4.5 | 137 | 0.106 |
| P6SMB110 | MYJ | 99 | 121 | 1.0 | 89.2 | 1 | 3.9 | 158 | 0.107 |
| P6SMB110A | MZJ | 105 | 116 | 1.0 | 94.0 | 1 | 4.1 | 152 | 0.107 |
| P6SMB120 | NDJ | 108 | 132 | 1.0 | 97.2 | 1 | 3.6 | 173 | 0.107 |
| P6SMB120A | NEJ | 114 | 126 | 1.0 | 102.0 | 1 | 3.8 | 165 | 0.107 |
| P6SMB130 | NFJ | 117 | 143 | 1.0 | 105.0 | 1 | 3.3 | 187 | 0.107 |
| P6SMB130A | NGJ | 124 | 137 | 1.0 | 111.0 | 1 | 3.5 | 179 | 0.107 |
| P6SMB150 | NHJ | 135 | 165 | 1.0 | 121.0 | 1 | 2.9 | 215 | 0.108 |
| P6SMB150A | NKJ | 143 | 158 | 1.0 | 128.0 | 1 | 3.0 | 207 | 0.108 |
| P6SMB160 | NLJ | 144 | 176 | 1.0 | 130.0 | 1 | 2.7 | 230 | 0.108 |
| P6SMB160A | NMJ | 152 | 168 | 1.0 | 136.0 | 1 | 2.8 | 219 | 0.108 |
| P6SMB170 | NNJ | 153 | 187 | 1.0 | 138.0 | 1 | 2.5 | 244 | 0.108 |
| P6SMB170A | NPJ | 162 | 179 | 1.0 | 145.0 | 1 | 2.6 | 234 | 0.108 |
| P6SMB180 | NQJ | 162 | 198 | 1.0 | 146.0 | 1 | 2.4 | 258 | 0.108 |
| P6SMB180A | NRJ | 171 | 189 | 1.0 | 154.0 | 1 | 2.5 | 246 | 0.108 |
| P6SMB200 | NSJ | 180 | 220 | 1.0 | 162.0 | 1 | 2.1 | 287 | 0.108 |
| P6SMB200A | NTJ | 190 | 210 | 1.0 | 171.0 | 1 | 2.2 | 274 | 0.108 |
| P6SMB220 | NUJ | 198 | 242 | 1.0 | 175.0 | 1 | 1.8 | 342 | 0.108 |
| P6SMB220A | NVJ | 209 | 231 | 1.0 | 185.0 | 1 | 1.9 | 328 | 0.108 |

Notes:

1. V_{BR} measure after I_T applied for 300μs, I_T=square wave pulse or equivalent.
2. Surge current waveform per Figure. 3 and derate per Figure. 2.
3. For bipolar types having V_{WM} of 10 volts and under, the I_D limit is doubled.
4. For bidirectional use C or CA suffix for types P6SMB6.8 - P6SMB220A.
5. All terms and symbols are consistent with ANSI/IEEE C62.35.

ORDERING INFORMATION

| PART NO. | PART NO. SUFFIX | PACKING CODE | PACKING CODE SUFFIX(*) | PACKAGE | PACKING |
|-----------------------|-----------------|--------------|------------------------|---------|--------------------------|
| P6SMBxxxx (Note 1) | H | R5 | G | SMB | 850 / 7" Plastic reel |
| | | R4 | | SMB | 3,000 / 13" Paper reel |
| | | M4 | | SMB | 3,000 / 13" Plastic reel |

Note:

1. "xxxx" defines voltage from 6.8V (P6SMB6.8) to 220V (P6SMB220A)

*: Optional available

EXAMPLE P/N

| EXAMPLE P/N | PART NO. | PART NO. SUFFIX | PACKING CODE | PACKING CODE SUFFIX | DESCRIPTION |
|--------------|----------|-----------------|--------------|---------------------|--------------------------------------|
| P6SMB20AHR5G | P6SMB20A | H | R5 | G | AEC-Q101 qualified Green compound |

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Peak Pulse Power Rating Curve

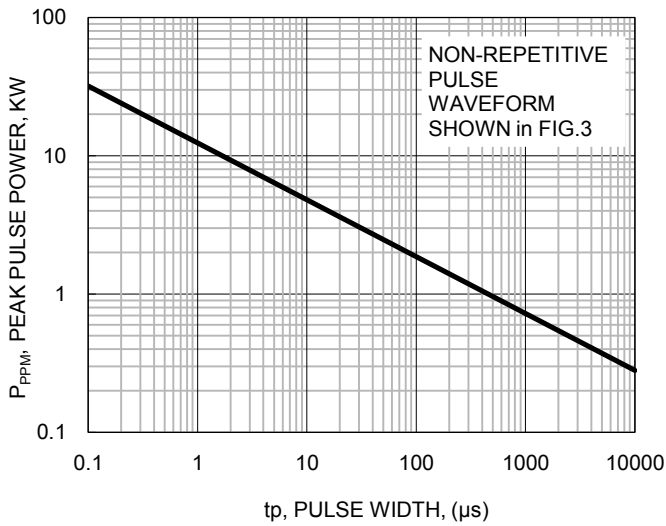


Fig2. Pulse Derating Curve

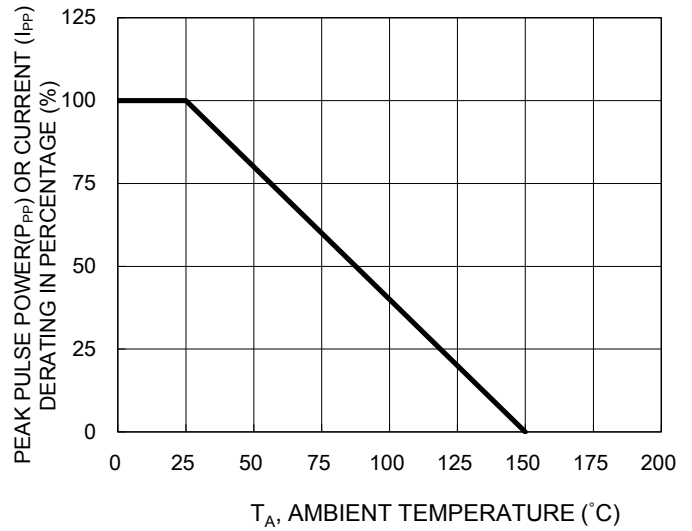


Fig3. Clamping Power Pulse Waveform

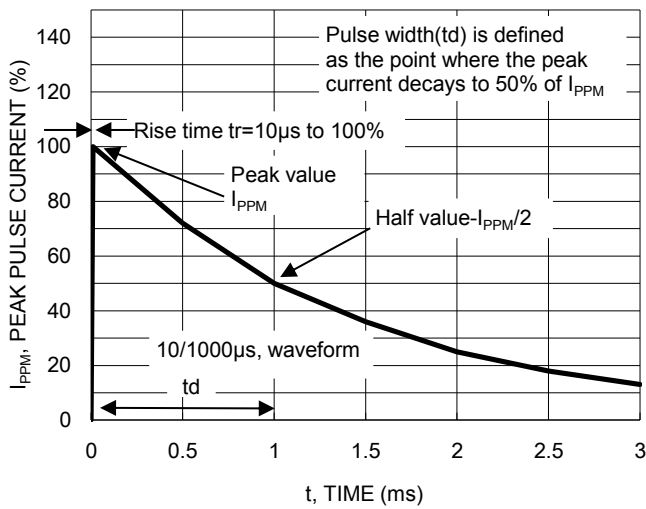


Fig4. Maximum Non-Repetitive Forward Surge Current Unidirectional Only



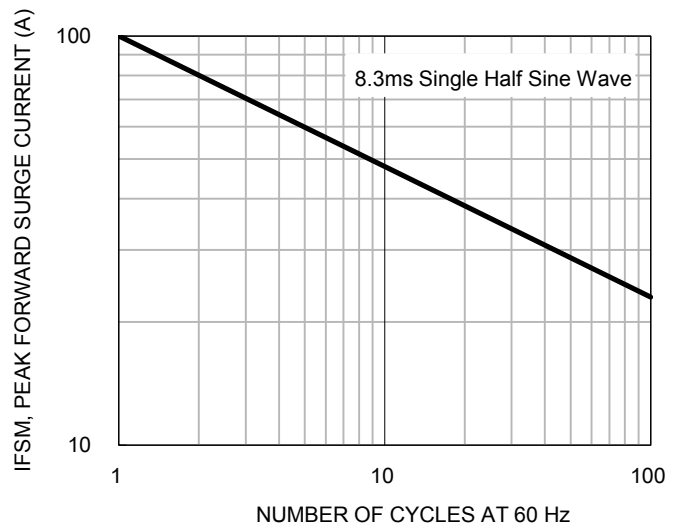


Fig5. Typical Junction Capacitance

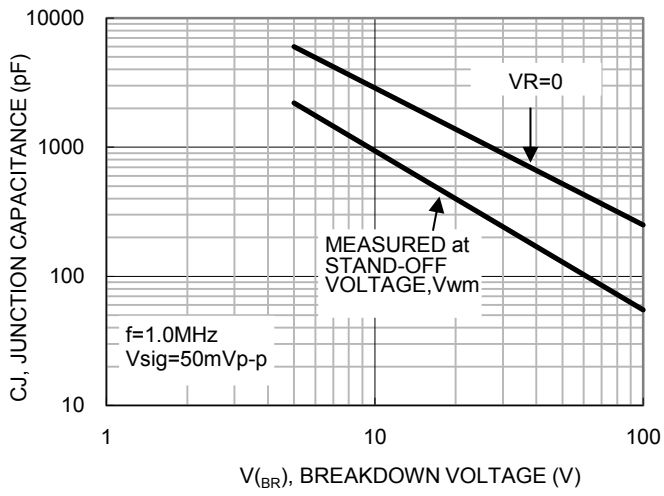


PACKAGE OUTLINE DIMENSIONS

DO-214AA (SMB)

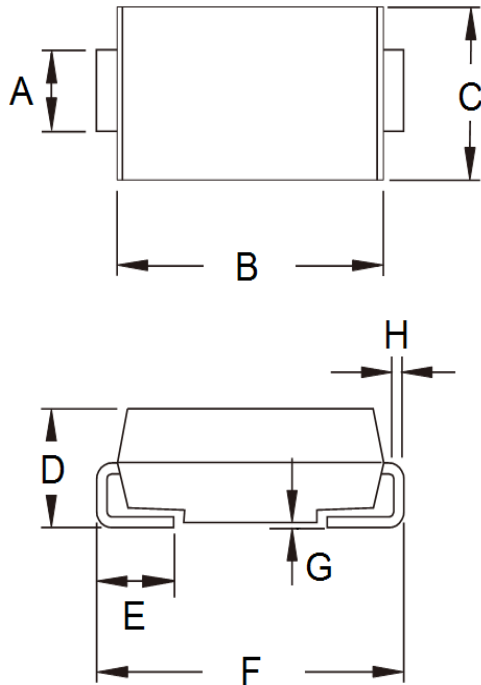

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|------|-------------|-------|
| | Min | Max | Min | Max |
| A | 1.95 | 2.20 | 0.077 | 0.087 |
| B | 4.05 | 4.60 | 0.159 | 0.181 |
| C | 3.30 | 3.95 | 0.130 | 0.156 |
| D | 1.95 | 2.65 | 0.077 | 0.104 |
| E | 0.75 | 1.60 | 0.030 | 0.063 |
| F | 5.10 | 5.60 | 0.201 | 0.220 |
| G | 0.05 | 0.20 | 0.002 | 0.008 |
| H | 0.15 | 0.31 | 0.006 | 0.012 |

SUGGESTED PAD LAYOUT

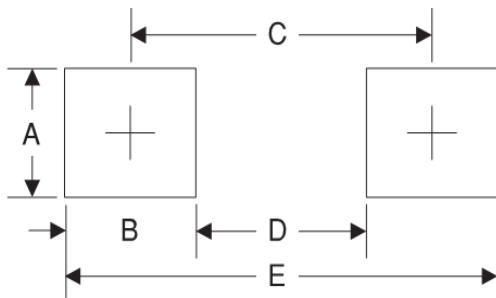

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A | 2.3 | 0.091 |
| B | 2.5 | 0.098 |
| C | 4.3 | 0.169 |
| D | 1.8 | 0.071 |
| E | 6.8 | 0.268 |

MARKING DIAGRAM



P/N = Marking Code
G = Green Compound
YW = Date Code
F = Factory Code

Note: Cathode band for uni-directional products only

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.