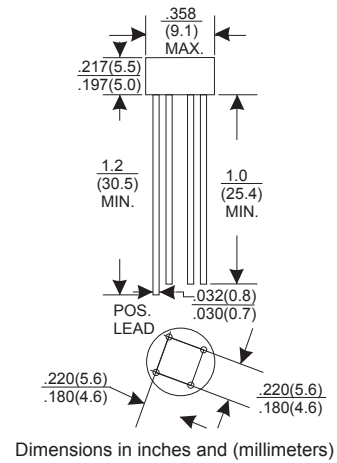




FEATURES

- Rating to 1000V PRVP
- Surge overload rating to 40 Amperes peak
- Glass passivated chip junctions
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead solderable per MIL-STD-202 method 208
- Lead: silver plated copper, solderde plated
- Plastic material has UL flammability classification94V-O



Maximum Ratings (@TA = 25°C unless otherwise specified)

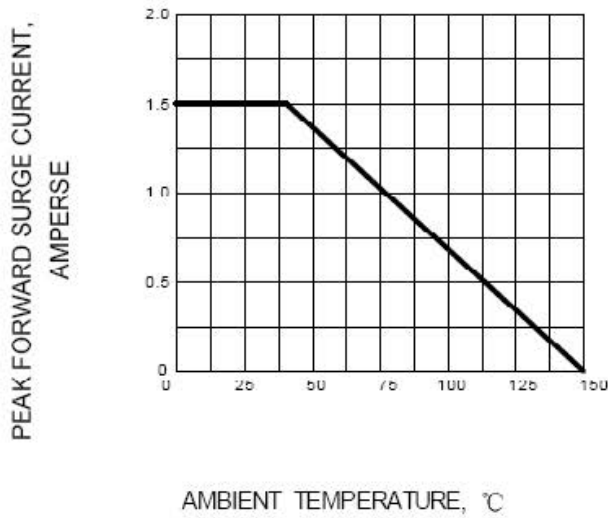
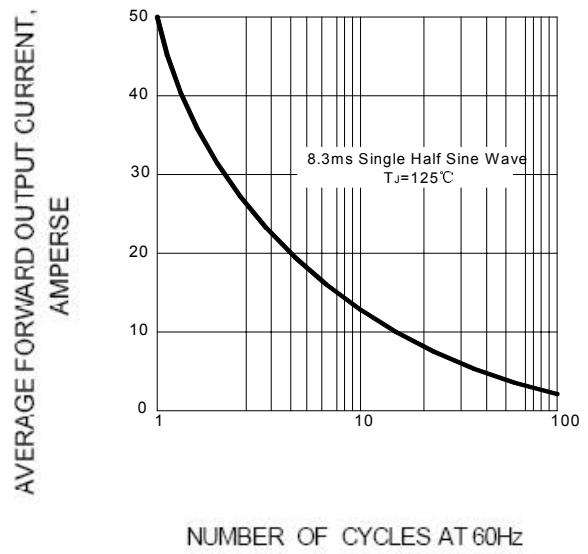
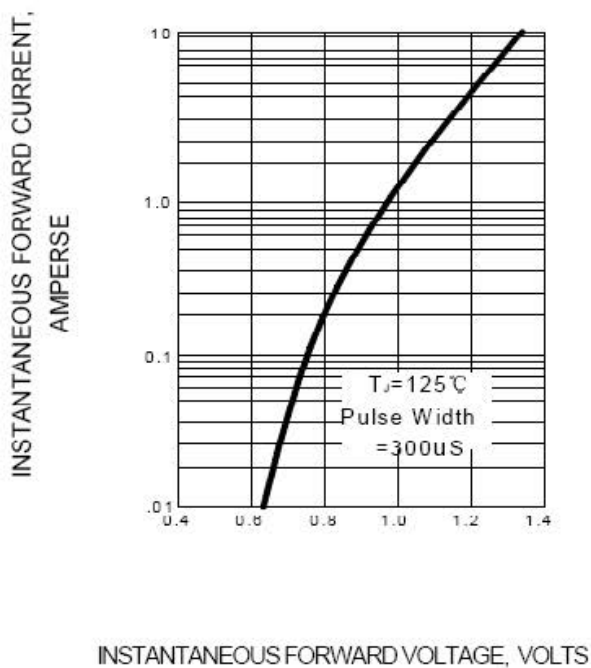
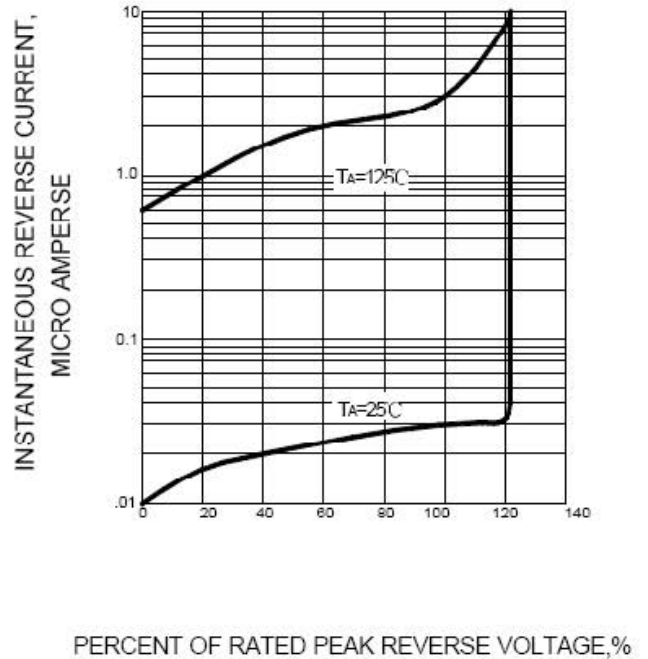
Characteristic	Symbol	W005M	W01M	W02M	W04 M	W06M	W08 M	W10M	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Reverse Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward Output current @T _A =40°C	I _{F(AV)}	1.5							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	50							A
I ² t Rating for fusing @T _j =25°C	I ² t	10							A ² S

Thermal Characteristics

Characteristic	Symbol	W005M	W01M	W02M	W04 M	W06M	W08 M	W10M	UNITS
Typical Thermal Resistance (Note)	R _{θJA} R _{θJL}	36 13							°C/W
Operating junction temperature range	T _J	-55 -- +150							°C
Storage temperature range	T _{STG}	-55 -- +150							°C

Electrical Characteristics (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	W005M	W01M	W02M	W04 M	W06M	W08 M	W10M	UNITS
Maximum instantaneous forward voltage at 1.5A	V _F	1.0							V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	5.0 0.5							μ A mA

FIG.1 – TYPICAL FORWARD CURRENT DERATING CURVE

FIG.2 -- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

FIG.3 – TYPICAL FORWARD CHARACTERISTIC

FIG.4 – TYPICAL REVERSE CHARACTERISTIC


Device	Shipping
W005M-W10M	50unit/pipe