



为您的产品保驾护航

PRODUCT DATASHEET

Electro-Static Discharge

JEN1006-15V ESD


## Features

- Ultra small package: 1.0x0.6x0.5mm(DFN1006)
- Protects one data or power line
- Ultra low leakage: nA level
- Operating voltage: 15V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge:  $\pm 30\text{KV}$
    - Contact discharge:  $\pm 30\text{KV}$
  - IEC 61000-4-5 (Lightning 8/20 $\mu\text{s}$ ): 10A
- RoHS Compliant


## Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Power Supply
- Keypads, Side Keys, LCD Displays

## Schematic Diagram



## Pin Description




## Limiting Values( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified)

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>ESD</sub>	Electrostatic Discharge Voltage	IEC 61000-4-2;Contact Discharge	-	$\pm 30$	kV
		IEC 61000-4-2;Air Discharge	-	$\pm 30$	kV
P <sub>PP</sub>	Peak Pulse Power	$t_p=8/20\mu\text{s}$	-	320	W
I <sub>PPM</sub>	Peak Pulse Current	$t_p=8/20\mu\text{s}$	-	10	A
T <sub>J</sub>	Operating Temperature Range	-	-55	125	$^\circ\text{C}$
T <sub>stg</sub>	Storage Temperature Range	-	-55	150	$^\circ\text{C}$


## Electrical Characteristics( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V <sub>RWM</sub>	Reverse Working Voltage	$T_A=25^\circ\text{C}$ , Pin 1 to Pin 2	-	-	15	V
V <sub>BR</sub>	Breakdown Voltage	$I_T=1\text{mA}$ ; Pin 1 to Pin 2	16.5	-	-	V
I <sub>R</sub>	Reverse Leakage Current	V <sub>RWM</sub> =15V; Pin 1 to Pin 2	-	-	0.2	$\mu\text{A}$
V <sub>F</sub>	Forward Voltage	$I_F=10\text{mA}$ ; Pin 1 to Pin 2	-	-	1.2	V
V <sub>C</sub>	Clamping Voltage	$I_{PP}=1\text{A}$ , $t_p=8/20\mu\text{s}$ ; Pin 1 to Pin 2	-	-	21	V
V <sub>C</sub>	Clamping Voltage	$I_{PP}=10\text{A}$ , $t_p=8/20\mu\text{s}$ ; Pin 1 to Pin 2	-	-	32	V
C <sub>J</sub>	Junction Capacitance	V <sub>R</sub> =0V, f=1MHZ	-	50	-	pF


Typical Characteristics

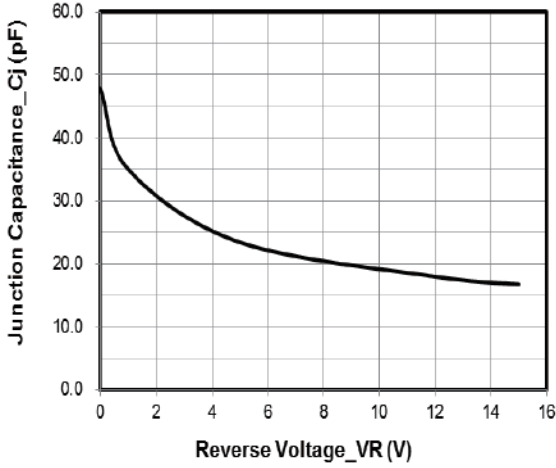


Junction Capacitance vs. Reverse Voltage

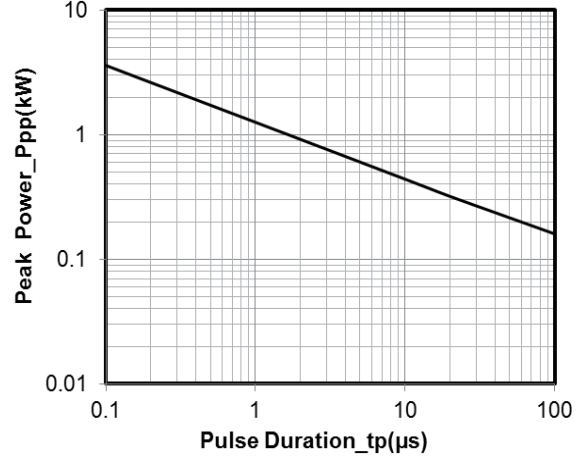


Peak Pulse Power vs. Pulse Time

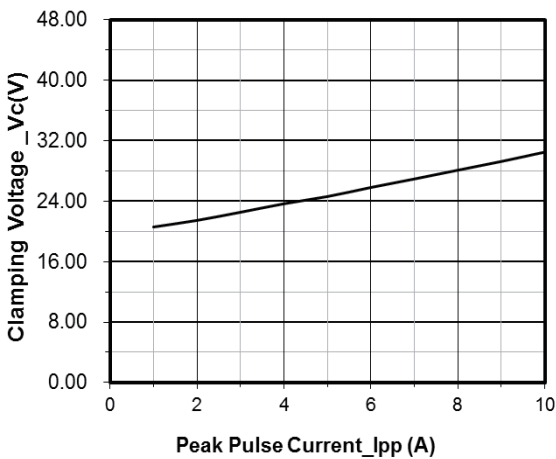


Clamping Voltage vs. Peak Pulse Current

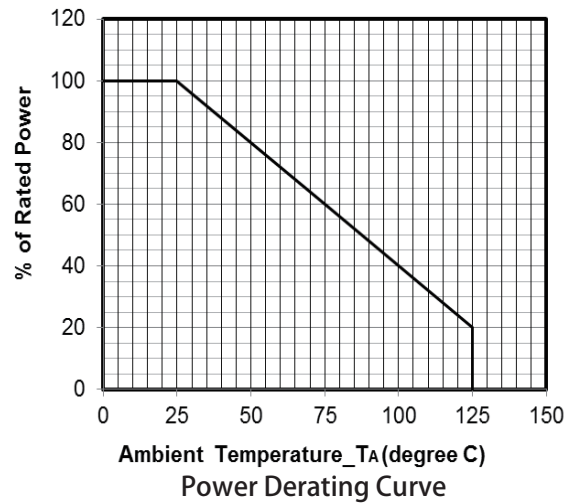


Ambient Temperature\_TA (degree C)  
Power Derating Curve

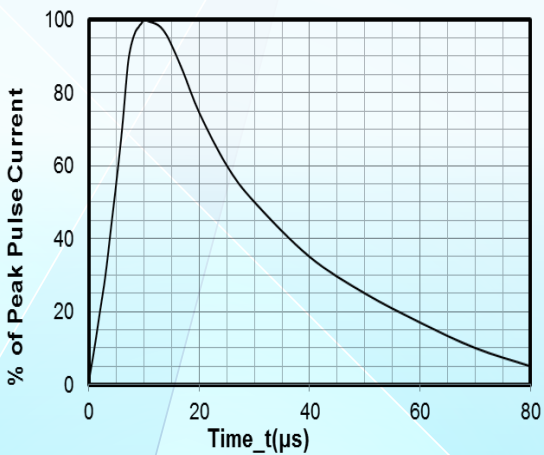


8 X 20 μs Pulse Waveform

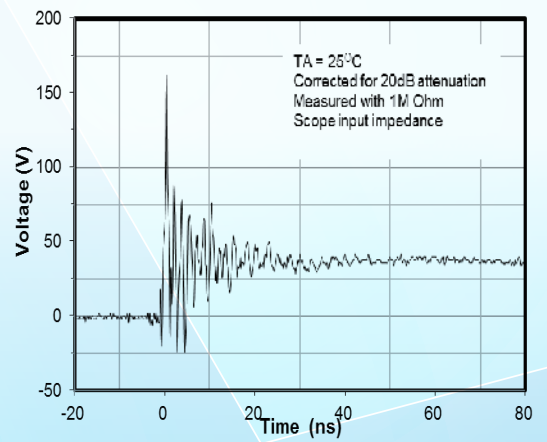

ESD Clamping Voltage  
8 kV Contact per IEC61000-4-2

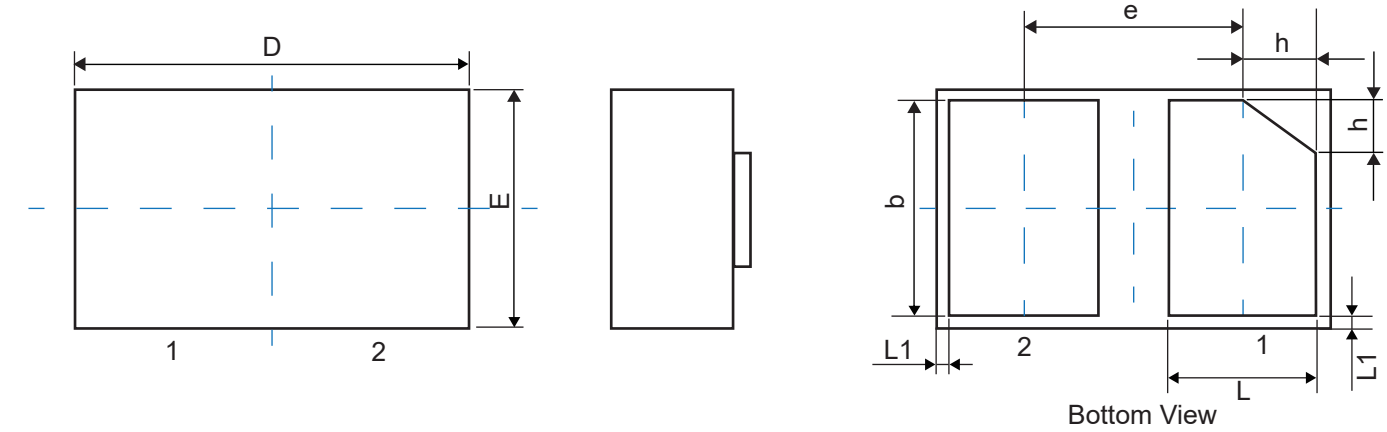**Physical Dimensions(mm.)**


Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min	Nom	Max	Min	Nom	Max
A	0.45	0.50	0.55	0.018	0.020	0.022
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.45	0.50	0.55	0.018	0.020	0.022
c	0.12	0.15	0.18	0.005	0.006	0.007
D	0.95	1.00	1.05	0.037	0.039	0.041
e	0.65 BSC			0.026 BSC		
E	0.55	0.60	0.65	0.022	0.024	0.026
L	0.20	0.25	0.30	0.008	0.010	0.012
L1	0.05 REF			0.002 REF		
h	0.07	0.12	0.17	0.003	0.005	0.007

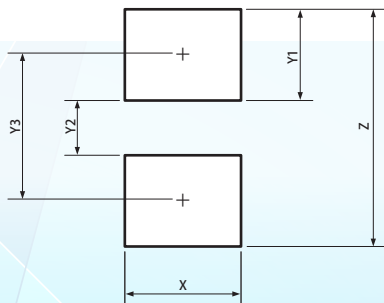
**Suggested Land Pattern**


Symbol	Dimensions	
	Millimeters	Inches
X	0.60	0.024
Y1	0.50	0.020
Y2	0.30	0.012
Y3	0.80	0.032
Z	1.30	0.052

**Packaging Quantity**

Part Number	Size(mm)	Delivery Form	Delivery Quantity
JEN1006-15V	1.00x0.60x0.50	7"T&R	10,000

### Soldering Parameters

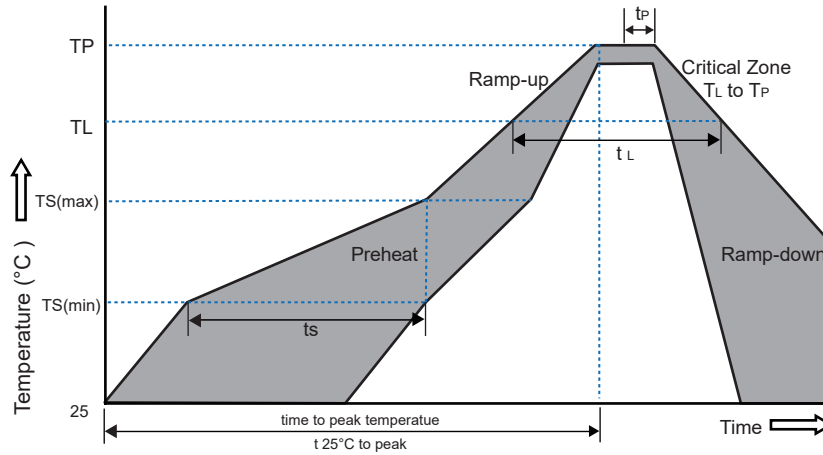

Reflow Condition		Pb-Free Assembly
Pre-heat	-Temperature Min( $T_{s(min)}$ )	+150°C
	-Temperature Max( $T_{s(max)}$ )	+200°C
	-Time(Min to Max)( $t_s$ )	60~180 secs.
Average ramp up rate (Liquid us Temp( $T_L$ ) to peak)		3°C/sec. Max
Ts(max) to $T_L$ - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature( $T_L$ )(Liquid us)	+217°C
	-Temperature ( $t_L$ )	60~150 secs.
Peak Temp ( $T_P$ )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp ( $t_p$ )		30 secs. Max
Ramp-down Rate		6°C/sec. Max
xTime 25°C to Peak Temp (TP)		8 min. Max
Do not exceed		+260°C

### Part Number System

## JE N1006 - 15V

