

DBLC03C THUR 24C

DBLC03C THUR 24C Bi-directional Ultra Low Capacitance TVS Array

General description

Bi-directional Ultra Low Capacitance TVS Array
in a SOD-323 Package.

FEATURES

- Low clamping voltage
- Low leakage current
- Working voltages : 3V, 5V, 8V, 12V, 15V, 24V
- Response time is < 1 ns


APPLICATIONS:

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Peripherals
- USB Interface


MACHANICAL DATA

- SOD-323 package
- Flammability Rating: UL 94V-0
- MSL1
- High temperature soldering guaranteed:260°C/10s

Package Outline



SOD-323 Package

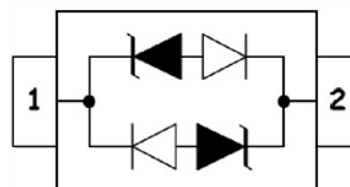

PIN CONFIGURATION


ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
VESD	ESD per IEC 61000-4-2 (Air)	±15	kV
	ESD per IEC 61000-4-2 (Contact)	±8	
PPP	Peak Pulse Power (8/20µs)	300	W
TOPT	Operating Temperature	-55~150	°C
TSTG	Storage Temperature	-55~150	°C
TL	Lead Soldering Temperature	260	°C


DBLC03C THUR 24C

ELECTRICAL CHARACTERISTICS (Tamb=25°C)									
PART NUMBER	DEVICE MARKING	V _{RWM}	V _B	I _T	V _{C@1A}	V _C		I _R	C _T
		(V) (max.)	(V) (min.)	(mA)	(V) (max.)	(V) (max.) (@A)	(μA) (max.)	(pF) (typ.)	
DBLC03C	CC or 3B	3.0	4.0	1	7.0	13.9	8	2	0.8
DBLC05C	AC	5.0	6.0	1	9.8	18.3	8	1	0.8
DBLC08C	BC	8.0	8.5	1	13.4	18.5	8	1	0.8
DBLC12C	DC	12.0	13.3	1	19.0	28.6	6	1	0.8
DBLC15C	EC	15.0	16.7	1	24.0	31.8	5	1	0.8
DBLC24C	HC	24.0	26.7	1	43.0	56.0	3	1	0.8


Typical Characteristic:

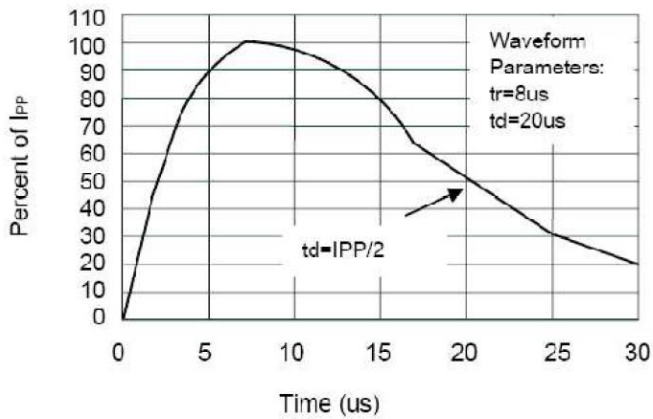


Pulse Waveform

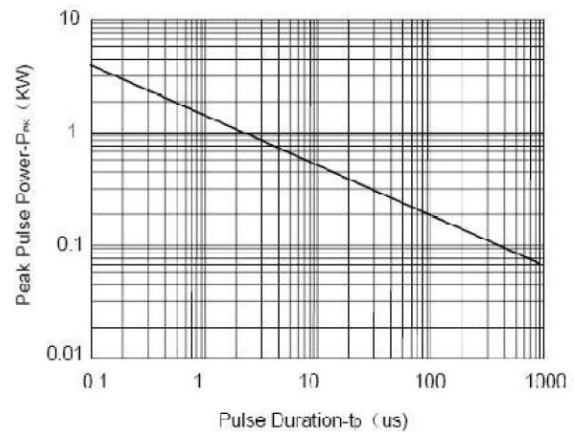

Non-Repetitive Peak Pulse Power vs. Pulse Time

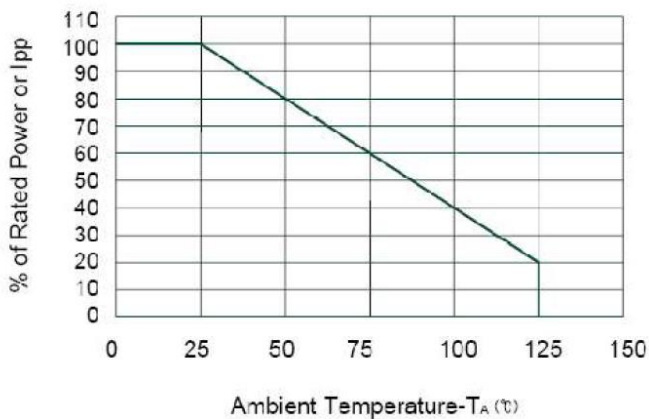


Power Derating Curve

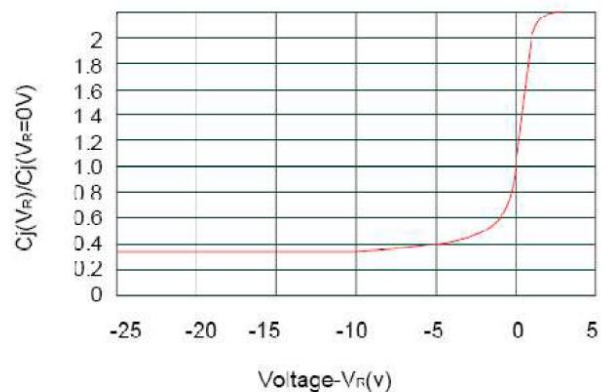


Junction Capacitance vs. Reverse Voltage

DBLC03C THUR 24C

SOD-323 PACKAGE OUTLINE DIMENSIONS

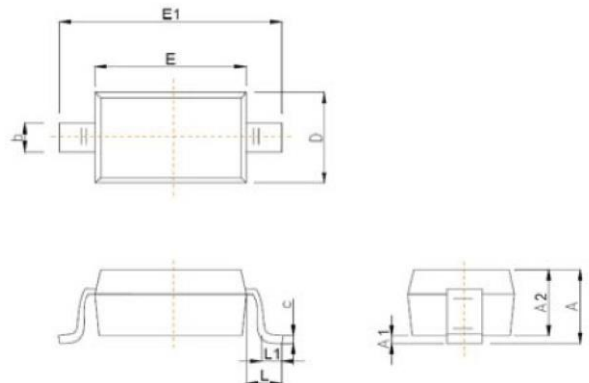

Symbol	Dimensions in Millimeters	
	Min	Max
A		1.00
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
e	1.800	2.040
L	0.475 REF	
L1	0.250	0.400
θ	0°	8°



Recommended Pad outline

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.