




E-NETTR 10/100 Base-T Single Port Transformer Module

P/N: H0602G

- * Designed to meet IEEE802.3u requirement
- * Designed to meet RoHS requirement
- * Designed to meet IR 255°C peak Requirement.
- * Primary inductance 350μH min with 8mA DC Bias
- * Operating temperature range: -40°C to +85°C
- * Storage temperature range: -40°C to +85°C




Electrical Specifications@25° C

Part Number	Turn Ratio (±3%)	OCL(uH Min) @ 100KHz/0.1V with 8mA DC Bias	L.L (uH Max)	C _{w/w} (pF Max)	DCR (Ω Max)	Hi-Pot (Vrms MIN)
H0602G	1CT:1CT	350	0.5	28	1.0	AC 1500V 1mA

Continue

Part Number	Insertion Loss 0.3~100MHZ (dB Max)	Return Loss (dB Min)				Cross Talk (dB Min)		DCMR (dB Min)		
		0.3-30MH	40MHz	50MHz	60-80MHz	0.3-60MHz	60-100MHz	0.3-30MHz	60MHz	100MHz
H0602G	-1.1	-18	-15.5	-12	-12	-35	-30	-40	-35	-30


Mechanical

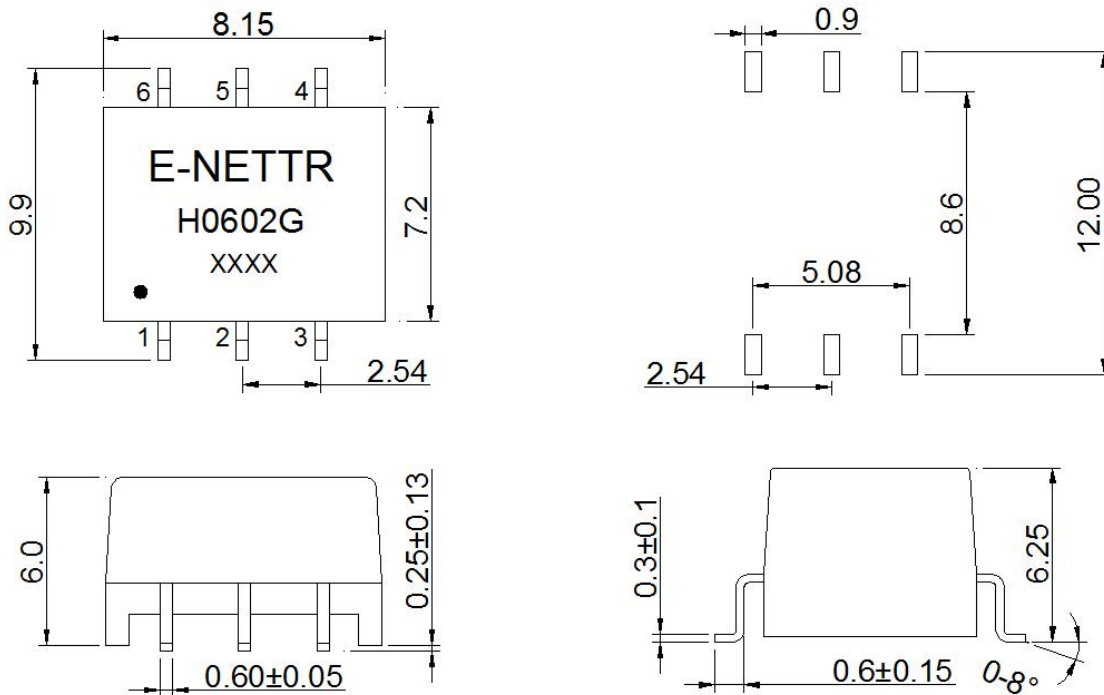

Unless otherwise specified tolerances: xx.xo ± 0.25mm
o.xx ± 0.05mm

Schematic

1CT:1CT

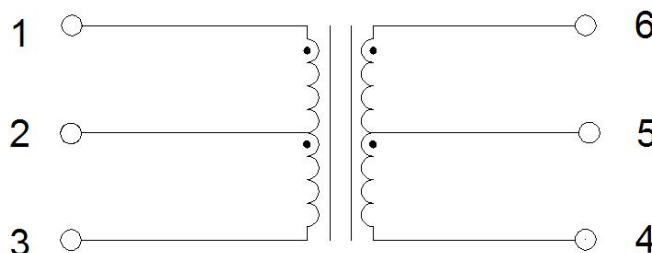

东莞市祥星电子有限公司

地址：东莞市石碣镇横滘科技中路第三工业区

TEL:0769-86384669

FAX:0769-81813600

Http://www.e-nettr.com

xxing.guang@163.com