

**FORESEE 4GB DDR4 2666  
UDIMM Datasheet**

**Version: 1.0**

LONGSYS ELECTRONICS RESERVES THE RIGHT TO CHANGE PRODUCTS INFORMATION AND SPECIFICATIONS WITHOUT NOTICE.

Products and specifications discussed herein are for reference purposes only. All information discussed herein is provided on an "AS IS" basis, without warranties of any kind.

This document and all information discussed herein remain the sole and exclusive property of Longsys Electronics. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppel or other-wise.

Longsys products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where product failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply.

For updates or additional information about Longsys products, contact your nearest Longsys office.

All brand names, trademarks and registered trademarks belong to their respective owners.

© 2020 Shenzhen Longsys Electronics Co., Ltd. All rights reserved.

## Revision History

Revision No.	History	Draft Date	Remark
1.0	Release	May 2020	

## Table of content

1. Description.....	5
2. Features.....	5
3. Ordering Information.....	6
4. Key Parameters.....	6
5. Address Table.....	6
6. DRAM Component Operating Temperature Range.....	8
7. AC & DC Operating Conditions.....	8
8. Supply Operating Conditions.....	8
9. 96-Ball FBGA – x16 Ball Assignments.....	9
10. Pin Descriptions.....	10
11. Input/Output Functional Descriptions.....	12
12. Pin Assignments.....	15
13. DDR4-2666 Speed Bins and Operations.....	17
14. Trouble shooting Guide.....	18
15. Functional Diagram.....	20
16. PCB Specifications.....	21
17. Module Dimensions.....	22

## 1. Description

FORESEE Unbuffered DDR4 SDRAM DIMMs (Unbuffered Double Data Rate Syn-chronous DRAM Dual In-Line Memory Modules) are low power, high-speed operation memory modules that use DDR4 SDRAM devices. These DDR4 SDRAM Unbuffered DIMMs are intended for use as main memory when installed in systems such as micro servers and mobile personal computers.

## 2. Features

- 288-Pin Unbuffered DDR4 SDRAM memory modules
- 8 Banks (2 Bank Groups)
- VDD = VDDQ = 1.2V ± 60mV
- 8-bit pre-fetch
- On Die Termination using ODT pin
- (Data Bus Inversion)
- CRC (Cyclic Redundancy Check) for Read/Write data security
- Internal VREF for data inputs
- External VPP for DRAM Activating Power
- capabilityPPR and sPPR is supported
- All of Lead-Free products are compliant for RoHS

### 3. Ordering Information

Part Number	Density	Speed	Component Composition	# of ranks
FD4AU2666C4GZF	4GB	DDR4 2666	256Mx16*8	2


### 4. Key Parameters

Grade	Speed (Mbps)	tCK (ns)	CAS Latency (tCK)	tRCD (ns)	tRP (ns)	tRAS (ns)	tRC (ns)	CL-tRCD-tRP
2666V	2666	0.750	19	14.25	14.25	32	46.25	19-19-19

### 5. Address Table

	256*16
Number of Bank Groups	2
Bank group Address	BG0
Bank Address in a BG	BA[1:0]
Row Address	32K (A[14:0])
Column Address	1K (A[9:0])
Page size	2 KB

## F D4 A U 2666 C 4G Z F

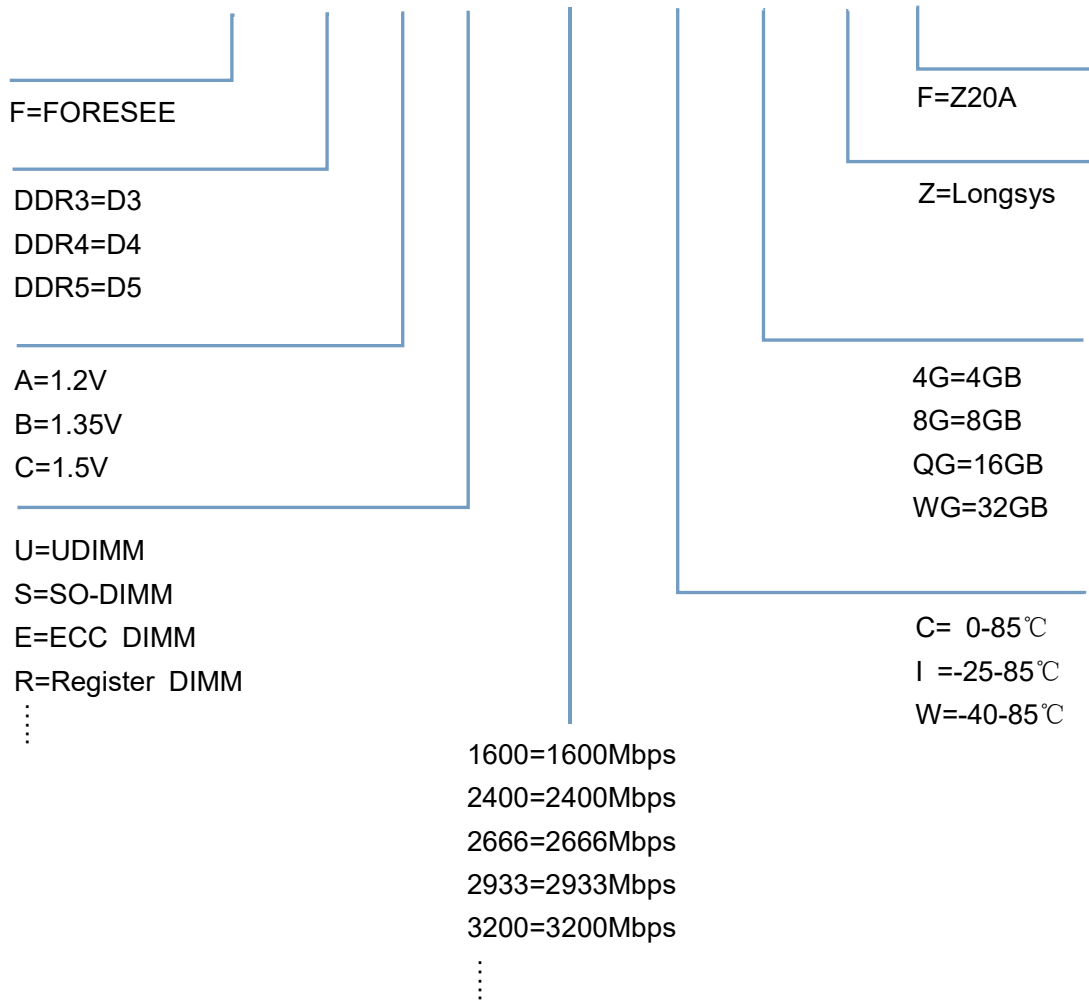

## 6. DRAM Component Operating Temperature Range

Symbol	Parameter	Rating	Units
T <sub>OPER</sub>	Normal Operating Temperature Range	0 to 85	°C

### Notes:

1. Operating Temperature T<sub>OPER</sub> is the case surface temperature on the center/top side of the DRAM.
2. The Normal Temperature Range specifies the temperatures where all DRAM specifications will be supported. During operation, the DRAM case temperature must be maintained between 0-85°C under all operating conditions.

## 7. AC & DC Operating Conditions

### Recommended DC Operating Conditions

Symbol	Parameter	Rating			Unit
		Min.	Typ.	Max.	
VDD	Supply Voltage	1.14	1.2	1.26	V
VDDQ	Supply Voltage for Output	1.14	1.2	1.26	V
VPP	Peak-to-Peak Voltage	2.375	2.5	2.75	V

### Notes:

1. Under all conditions VDDQ must be less than or equal to VDD.
2. VDDQ tracks with VDD. AC parameters are measured with VDD and VDDQ tied together.
3. DC bandwidth is limited to 20MHz.

## 8. Supply Operating Conditions

### Recommended Supply Operating Conditions

Symbol	Parameter	Rating			Unit
		Min.	Typ.	Max.	
VDD	Supply Voltage	1.14	1.2	1.26	V
VDDQ	Supply Voltage for Output	1.14	1.2	1.26	V
VPP	Word line supply voltage	2.375	2.5	2.75	V

### Notes:

4. Under all conditions VDDQ must be less than or equal to VDD.
5. VDDQ tracks with VDD. AC parameters are measured with VDD and VDDQ tied together.
6. DC bandwidth is limited to 20MHz.



## 9. 96-Ball FBGA – x16 Ball Assignments

	1	2	3	4	5	6	7	8	9	
A	VDDQ	VSSQ	DQ8				UDQS_c	VSSQ	VDDQ	A
B	VPP	VSS	VDD				DUQS_t	DQ9	VDD	B
C	VDDQ	DQ12	DQ10				DQ11	DQ13	VSSQ	C
D	VDD	VSSQ	DQ14				DQ15	VSSQ	VDDQ	D
E	VSS	UDM_n/ UDBI_n	VSSQ				LDM_n/ LDBI_n	VSSQ	VSS	E
F	VSSQ	VDDQ	LDQS_c				DQ1	VDDQ	ZQ	F
G	VDDQ	DQ0	LDQS_t				VDD	VSS	VDDQ	G
H	VSSQ	DQ4	DQ2				DQ3	DQ5	VSSQ	H
J	VDD	VDDQ	DQ6				DQ7	VDDQ	VDD	J
K	VSS	CKE	ODT				CK_t	CK_c	VSS	K
L	VDD	WE_n/A14	ACT_n				CS_n	RAS_n/A16	VDD	L
M	VREFCA	BG0	A10/AP				A12/BC_n	CAS_n/A15	VSS	M
N	VSS	BA0	A4				A3	BA1	TEN	N
P	RESET_n	A6	A0				A1	A5	ALERT_n	P
R	VDD	A8	A2				A9	A7	VPP	R
T	VSS	A11	PAR				NC	A13	VDD	T
	1	2	3	4	5	6	7	8	9	

## 10. Pin Descriptions

Pin Name	Description	Pin Name	Description
A0–A17 <sup>1</sup>	SDRAM address input	SCL	I <sup>2</sup> C serial bus clock for SPD/TS and register
BA0, BA1	SDRAM bank select input	SDA	I <sup>2</sup> C serial data line for SPD/TS and register
BG0, BG1	Register bank group select input	SA0–SA2	I <sup>2</sup> C slave address select for SPD/TS and register
RAS_n <sup>2</sup>	Register row address strobe input	PAR	Register parity input
CAS_n <sup>3</sup>	Register column address strobe input	VDD	SDRAM core power
WE_n <sup>4</sup>	Register write enable input		
CS0_n, CS1_n, CS2_n, CS3_n	DIMM Rank Select Lines input	12 V	Optional Power Supply on socket but not used on RDIMM
CKE0, CKE1	Register clock enable lines input	VREFCA	SDRAM command/address reference supply
ODT0, ODT1	Register on-die termination control lines input	VSS	Power supply return (ground)
ACT_n	Register input for activate input	VDDSPD	Serial SPD/TS positive power supply
DQ0–DQ63	DIMM memory data bus	ALERT_n	Register ALERT_n output
CB0–CB7	DIMM ECC check bits	VPP	SDRAM Supply
TDQS9_t-TDQS17_t TDQS_c-TDQS17_c	Dummy loads for mixed populations of x4 based and x8 based RDIMMs.		
DQS0_t-DQS17_t	Data Buffer data strobes (positive line of differential pair)	RESET_n	Set Register and SDRAMs to a Known State
DBI0_n-DBI8_n	Data Bus Inversion	EVENT_n	SPD signals a thermal event has occurred
CK0_t, CK1_t	Register clock input (positive line of differential pair)	VTT	SDRAM I/O termination supply
CK0_c, CK1_c	Register clock input (negative line of differential pair)	RFU	Reserved for future use

**Notes:**

1. Address A17 is only valid for 16Gbx4 based SDRAMs.
2. RAS\_n is a multiplexed function with A16.
3. CAS\_n is a multiplexed function with A15.
4. WE\_n is a multiplexed function with A14.

## 11. Input/Output Functional Descriptions

Symbol	Type	Function
CK0/#CK0 CK1/#CK1	IN	Clock: CK_t and CK_c are differential clock inputs. All address and control inputsignals are sampled on the
CKE0, CKE1	Input	Clock Enable: CKE HIGH activates and CKE LOW deactivates internal clock signals and device input buffers and output drivers. Taking CKE LOW provides Precharge Power-Down and Self-Refresh operation (all banks idle), or Active Power-Down (row Active in any bank). CKE is synchronous for Self-Refresh exit. After VREFCA and Internal DQ Vref have become stable during the power on and initialization sequence, they must be maintained during all operations (including Self-Refresh). CKE must be maintained high throughout read and write accesses. Input buffers, excluding CK_t, CK_c, ODT and CKE, are disabled during power-down. Input buffers, excluding CKE, are disabled during Self-Refresh.
CS0_n, CS1_n, CS2_n, CS3_n	Input	Chip Select: All commands are masked when CS_n is registered HIGH. CS_n provides for external Rank selection on systems with multiple Ranks. CS_n is considered part of the command code.CS2_n and CS3_n are not used on UDIMMs.
C0, C1, C2	Input	Chip ID: Chip ID is only used for 3DS for 2,4,8 high stack via TSV to select each slice of stacked component. Chip ID is considered part of the command code. Not used on UDIMMs.
ODT0, ODT1	Input	On Die Termination: ODT (registered HIGH) enables RTT_NOM termination resistance internal to the DDR4 SDRAM. When enabled, ODT is only applied to each DQ, DQS_t, DQS_c and DM_n/DBI_n/TDQS_t, NU/TDQS_c (When TDQS is enabled via Mode Register A11=1 in MR1) signal for x8 configurations. For x16 configuration, ODT is applied to each DQ, DQSU_t, DQSU_c, DQSL_t, DQSL_c, DMU_n, and DML_n signal. The ODT pin will be ignored if MR1 is programmed to disable RTT_NOM
ACT_n	Input	Activation Command Input: ACT_n defines the Activation command being entered along with CS_n. The input into RAS_n/A16, CAS_n/A15, and WE_n/A14 will be considered as Row Address A16, A15 and A14.
RAS_n/A16, CAS_n/A15, WE_n/A14	Input	Command Inputs: RAS_n/A16, CAS_n/A15 and WE_n/A14 (along with CS_n) define the command being entered. Those pins have multi function. For example,for activation with ACT_n Low, these are Addresses like A16, A15 and A14 but for non-activation command with ACT_n High, these are Command pins for Read, Write and other command defined in command truth table.

Symbol	Type	Function
DM_n/DBI_n/ TDQS_t, (DMU_n/ DBIU_n), (DML_n/ DBIL_n)	Input/ Output	Input Data Mask and Data Bus Inversion: DM_n is an input mask signal for write data. Input data is masked when DM_n is sampled LOW coincident with that input data during a Write access. DBI_n is an input/output identifying whether to store/output the true or inverted data. If DBI_n is LOW, the data will be stored/output after inversion inside the DDR4 SDRAM and not inverted if DBI_n is HIGH. TDQS is only supported in x8 SDRAM configurations. TDQS is not valid for UDIMMs.
BG0, BG1	Input	Bank Group Inputs: BG0 - BG1 define which bank group an Active, Read, Write or Precharge command is being applied. BG0 also determines which mode register is to be accessed during a MRS cycle. x4/x8 SDRAM configurations have BG0 and BG1. x16 based SDRAMs only have BG0.
BA0, BA1	Input	Bank Address Inputs: BA0 - BA1 define to which bank an Active, Read, Write or Precharge command is being applied. Bank address also determines which mode register is to be accessed during a MRS cycle.
A0 - A17	Input	Address Inputs: Provide the row address for ACTIVATE Commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. A10/AP, A12/BC_n, RAS_n/A16, CAS_n/A15 and WE_n/A14 have additional functions. See other rows. The address inputs also provide the op-code during Mode Register Set commands. A17 is only defined for the x4 SDRAM configuration.
A10 / AP	Input	Auto-precharge: A10 is sampled during Read/Write commands to determine whether Autoprecharge should be performed to the accessed bank after the Read/Write operation. (HIGH: Autoprecharge; LOW: no Autoprecharge). A10 is sampled during a Precharge command to determine whether the Precharge applies to one bank (A10 LOW) or all banks (A10 HIGH). If only one bank is to be precharged, the bank is selected by bank addresses.
A12 / BC_n	Input	Burst Chop: A12/BC_n is sampled during Read and Write commands to determine if burst chop (on-the-fly) will be performed. (HIGH, no burst chop; LOW: burst chopped). See command truth table for details.
RESET_n	CMOS Input	Active Low Asynchronous Reset: Reset is active when RESET_n is LOW, and inactive when RESET_n is HIGH. RESET_n must be HIGH during normal operation.
DQ	Input/ Output	Data Input/ Output: Bi-directional data bus. If CRC is enabled via Mode register then CRC code is added at the end of Data Burst. Any DQ from DQ0-DQ3 may indicate the internal Vref level during test via Mode Register Setting MR4 A4=High. Refer to vendor specific data sheets to determine which DQ is used.
PARITY	Input	Command and Address Parity Input: DDR4 Supports Even Parity check in DRAMs with MR setting. Once it's enabled via Register in MR5, then DRAM calculates Parity with ACT_n, RAS_n/A16, CAS_n/A15, WE_n/A14, BG0-BG1, BA0-BA1, A16-A0. Input parity should be maintained at the rising edge of the clock and at the same time with command & address with CS_n LOW

Symbol	Type	Function
DQS_t, DQS_c, DQSU_t, DQSU_c, DQSL_t, DQSL_c	Input/ Output	Data Strobe: output with read data, input with write data. Edge-aligned with read data, centered in write data. For the x16, DQSL corresponds to the data on DQL0-DQL7; DQSU corresponds to the data on DQU0-DQU7. The data strobe DQS_t, DQSL_t and DQSU_t are paired with differential signals DQS_c, DQSL_c, and DQSU_c, respectively, to provide differential pair signaling to the system during reads and writes. DDR4 SDRAM supports differential data strobe only and does not support single-ended.
TDQS_t, TDQS_c	Output	Termination Data Strobe: TDQS_t/TDQS_c are not valid for UDIMMs.
ALERT_n	Output	Alert: It has multi functions such as CRC error flag, Command and Address Parity error flag as Output signal. If there is error in CRC, then ALERT_n goes LOW for the period time interval and goes back HIGH. If there is error in Command Address Parity Check, then ALERT_n goes LOW for relatively long period until on-going DRAM internal recovery transaction is complete. During Connectivity Test mode, this pin functions as an input. Using this signal or not is dependent on the system.
RFU		Reserved for Future Use. No on DIMM electrical connection is present.
NC		No Connect: No on DIMM electrical connection is present.
VDD1	Supply	Power Supply: 1.2 V +/- 0.06 V
VSS	Supply	Ground
VPP	Supply	DRAM Activating Power Supply: 2.5V (2.375V min, 2.75V max)
VTT	Supply	Power Supply for termination of Address, Command and Control, VDD/2.
12 V	Supply	12 V supply not used on UDIMMs.
VDDSPD	Supply	Power supply used to power the I2C bus on the SPD-TSE.
VREFCA	Supply	Reference voltage for CA

### Note:

- Input pins (BG0-BG1, BA0-BA1, A0-A17, ACT\_n, RAS\_n/A16, CAS\_n/A15, WE\_n/A14, CS\_n, CKE, ODT, and RESET\_n) do not supply termination.

## 12. Pin Assignments

Pin	Front Side Pin Label	Pin	Back Side Pin Label	Pin	Front Side Pin Label	Pin	Back Side Pin Label
1	NC	145	NC	74	CK0_t	218	CK1_t
2	VSS	146	VREFCA	75	CK0_c	219	CK1_c
3	DQ4	147	VSS	76	VDD	220	VDD
4	VSS	148	DQ5	77	VTT	221	VTT
5	DQ0	149	VSS	KEY			
6	VSS	150	DQ1				
7	DM0_n,DBI_n,NC	151	VSS	78	EVENT_n	222	PARITY
8	NC	152	DQS0_c	79	A0	223	VDD
9	VSS	153	DQS0_t	80	VDD	224	BA1
10	DQ6	154	VSS	81	BA0	225	A10/AP
11	VSS	155	DQ7	82	RAS_n/A16	226	VDD
12	DQ2	156	VSS	83	VDD	227	RFU
13	VSS	157	DQ3	84	CS0_n	228	WE_n/A14
14	DQ12	158	VSS	85	VDD	229	VDD
15	VSS	159	DQ13	86	CAS_n/A15	230	NC
16	DQ8	160	VSS	87	ODT0	231	VDD
17	VSS	161	DQ9	88	VDD	232	A13
18	DM1_n,DBI1_n,NC	162	VSS	89	CS1_n	233	VDD
19	NC	163	DQS1_c	90	VDD	234	NC
20	VSS	164	DQS1_t	91	ODT1	235	NC
21	DQ14	165	VSS	92	VDD	236	VDD
22	VSS	166	DQ15	93	NC	237	NC,CS3_n,C1
23	DQ10	167	VSS	94	VSS	238	SA2
24	VSS	168	DQ11	95	DQ36	239	VSS
25	DQ20	169	VSS	96	VSS	240	DQ37
26	VSS	170	DQ21	97	DQ32	241	VSS
27	DQ16	171	VSS	98	VSS	242	DQ33
28	VSS	172	DQ17	99	DM4_n,DBI4_n,NC	243	VSS
29	DM2_n,DBI2_n,NC	173	VSS	100	NC	244	DQS4_c
30	NC	174	DQS2_c	101	VSS	245	DQS4_t
31	VSS	175	DQS2_t	102	DQ38	246	VSS
32	DQ22	176	VSS	103	VSS	247	DQ39
33	VSS	177	DQ23	104	DQ34	248	VSS
34	DQ18	178	VSS	105	VSS	249	DQ35
35	VSS	179	DQ19	106	DQ44	250	VSS
36	DQ28	180	VSS	107	VSS	251	DQ45
37	VSS	181	DQ29	108	DQ40	252	VSS

Pin	Front Side Pin Label	Pin	Back Side Pin Label	Pin	Front Side Pin Label	Pin	Back Side Pin Label
38	DQ24	182	VSS	109	VSS	253	DQ41
39	VSS	183	DQ25	110	DM5_n,DBI5_n,NC	254	VSS
40	DM3_n,DBI3_n,NC	184	VSS	111	NC	255	DQS5_c
41	NC	185	DQS3_c	112	VSS	256	DQS3_t
42	VSS	186	DQS3_t	113	DQ46	257	VSS
43	DQ30	187	VSS	114	VSS	258	DQ47
44	VSS	188	DQ31	115	DQ42	259	VSS
45	DQ26	189	VSS	116	VSS	260	DQ43
46	VSS	190	DQ27	117	DQ52	261	VSS
47	CB4,NC	191	VSS	118	VSS	262	DQ53
48	VSS	192	CB5,NC	119	DQ48	263	VSS
49	CB0,NC	193	VSS	120	VSS	264	DQ49
50	VSS	194	CB1,NC	121	DM6_n,DBI6_n,NC	265	VSS
51	DM8_n,DBI_n,NC	195	VSS	122	NC	266	DQS6_c
52	NC	196	DQS8_c	123	VSS	267	DQS6_t
53	VSS	197	DQS8_t	124	DQ54	268	VSS
54	CB6,NC	198	VSS	125	VSS	269	DQ55
55	VSS	199	CB7,NC	126	DQ50	270	VSS
56	CB2,NC	200	VSS	127	VSS	271	DQ51
57	VSS	201	CB3,NC	128	DQ60	272	VSS
58	RESET_n	202	VSS	129	VSS	273	DQ61
59	VDD	203	CKE1	130	DQ56	274	VSS
60	ACT_n	204	VDD	131	VSS	275	DQ57
61	VDD	205	RFU	132	DM7_n,DBI7_n,NC	276	VSS
62	ACT_n	206	VDD	133	NC	277	DQS7_c
63	BG0	207	BG1	134	VSS	278	DQS7_t
64	VDD	208	ALERT_n	135	DQ62	279	VSS
65	A12/BC_n	209	VDD	136	VSS	280	DQ63
66	A9	210	A11	137	DQ58	281	VSS
67	VDD	211	A7	138	VSS	282	DQ59
68	A8	212	VDD	139	SA0	283	VSS
69	A6	213	A5	140	SA1	284	VDDSPD
70	VDD	214	A4	141	SCL	285	SDA
71	A3	215	VDD	142	VPP	286	VPP
72	A12/BC_n	216	A2	143	VPP	287	VPP
73	VDD	217	VDD	144	RFU	288	VPP



**13. DDR4-2666 Speed Bins and Operations**

Speed Bin		DDR4-2666V		Unit
CL-nRCD-nRP		19-19-19		
Parameter	Symbol	min	max	
Internal READ command to first data	tAA	14.25 <sup>5</sup>	18.00	ns
Internal READ command to first data with read DBI enabled	tAA_DBI	tAA(MAX) + 3nCK	-	ns
ACT to internal READ or WRITE delay time	tRCD	14.25	-	ns
PRE command period	tRP	14.25	-	ns
ACT to PRE command Period	tRAS	32	9 x tREFI	ns
ACT to ACT or REF command period	tRC	tRAS + tRP	-	ns

## 14. Trouble shooting Guide

Description: DDRIV SDRAM, Double-Rank, x16-FBGA 96-Ball-based, x64 UNBUFFERED, 288-pin UDIMM

Module Pin No.	Module DQ	Damping RES.	IC No.	IC DQ	Module Pin No.	Module DQ	Damping RES.	IC No.	IC DQ
5	0	RN9(3-6)	U1	3	27	16	RN15(3-6)	U2	3
150	1	RN9(4-5)		1	172	17	RN15(4-5)		1
12	2	RN11(3-6)		2	34	18	RN17(3-6)		2
157	3	RN11(4-5)		0	179	19	RN17(4-5)		0
3	4	RN9(1-8)		7	25	20	RN15(1-8)		7
148	5	RN9(2-7)		5	170	21	RN15(2-7)		5
10	6	RN11(1-8)		6	32	22	RN17(1-8)		6
155	7	RN11(2-7)		4	177	23	RN17(2-7)		4
16	8	RN12(3-6)		9	38	24	RN18(3-6)		9
161	9	RN12(4-5)		11	183	25	RN18(4-5)		11
23	10	RN14(3-6)		10	45	26	RN20(3-6)		10
168	11	RN14(4-5)		8	190	27	RN20(4-5)		8
14	12	RN12(1-8)		15	36	28	RN18(1-8)		15
159	13	RN12(2-7)		13	181	29	RN18(2-7)		13
21	14	RN14(1-8)		12	43	30	RN20(1-8)		12
166	15	RN14(2-7)		14	188	31	RN20(2-7)		14
97	32	RN21(3-6)	U4	3	119	48	RN27(3-6)	U5	3
242	33	RN21(4-5)		1	264	49	RN27(4-5)		1
104	34	RN23(3-6)		2	126	50	RN29(3-6)		2
249	35	RN23(4-5)		0	271	51	RN29(4-5)		0
95	36	RN21(1-8)		7	117	52	RN27(1-8)		7
240	37	RN21(2-7)		5	262	53	RN27(2-7)		5
102	38	RN23(1-8)		6	124	54	RN29(1-8)		6
247	39	RN23(2-7)		4	269	55	RN29(2-7)		4
108	40	RN24(3-6)		9	130	56	RN30(3-6)		9
253	41	RN24(4-5)		11	275	57	RN30(4-5)		11
115	42	RN26(3-6)		10	137	58	RN32(3-6)		10
260	43	RN26(4-5)		8	282	59	RN32(4-5)		8
106	44	RN24(1-8)		15	128	60	RN30(1-8)		15
251	45	RN24(2-7)		13	273	61	RN30(2-7)		13
113	46	RN26(1-8)		12	135	62	RN32(1-8)		12
258	47	RN26(2-7)		14	280	63	RN32(2-7)		14


## Shenzhen Longsys Electronics Co., Ltd

Module Pin No.	Module DQ	Damping RES.	IC No.	IC DQ	Module Pin No.	Module DQ	Damping RES.	IC No.	IC DQ
5	0	RN9(3-6)	U6	2	27	16	RN15(3-6)	U7	2
150	1	RN9(4-5)		0	172	17	RN15(4-5)		0
12	2	RN11(3-6)		3	34	18	RN17(3-6)		3
157	3	RN11(4-5)		1	179	19	RN17(4-5)		1
3	4	RN9(1-8)		6	25	20	RN15(1-8)		6
148	5	RN9(2-7)		4	170	21	RN15(2-7)		4
10	6	RN11(1-8)		7	32	22	RN17(1-8)		7
155	7	RN11(2-7)		5	177	23	RN17(2-7)		5
16	8	RN12(3-6)		8	38	24	RN18(3-6)		8
161	9	RN12(4-5)		10	183	25	RN18(4-5)		10
23	10	RN14(3-6)		11	45	26	RN20(3-6)		11
168	11	RN14(4-5)		9	190	27	RN20(4-5)		9
14	12	RN12(1-8)		14	36	28	RN18(1-8)		14
159	13	RN12(2-7)		12	181	29	RN18(2-7)		12
21	14	RN14(1-8)		13	43	30	RN20(1-8)		13
166	15	RN14(2-7)		15	188	31	RN20(2-7)		15
97	32	RN21(3-6)	U8	2	119	48	RN27(3-6)	U9	2
242	33	RN21(4-5)		0	264	49	RN27(4-5)		0
104	34	RN23(3-6)		3	126	50	RN29(3-6)		3
249	35	RN23(4-5)		1	271	51	RN29(4-5)		1
95	36	RN21(1-8)		6	117	52	RN27(1-8)		6
240	37	RN21(2-7)		4	262	53	RN27(2-7)		4
102	38	RN23(1-8)		7	124	54	RN29(1-8)		7
247	39	RN23(2-7)		5	269	55	RN29(2-7)		5
108	40	RN24(3-6)		8	130	56	RN30(3-6)		8
253	41	RN24(4-5)		10	275	57	RN30(4-5)		10
115	42	RN26(3-6)		11	137	58	RN32(3-6)		11
260	43	RN26(4-5)		9	282	59	RN32(4-5)		9
106	44	RN24(1-8)		14	128	60	RN30(1-8)		14
251	45	RN24(2-7)		12	273	61	RN30(2-7)		12
113	46	RN26(1-8)		13	135	62	RN32(1-8)		13
258	47	RN26(2-7)		15	280	63	RN32(2-7)		15

**First check the SPD data and EEPROM. Then check the following components for other problem.**

	Clock loading	Boot failure
2-RANK	RN8, RN33	SPD data, U3

## 15. Functional Diagram

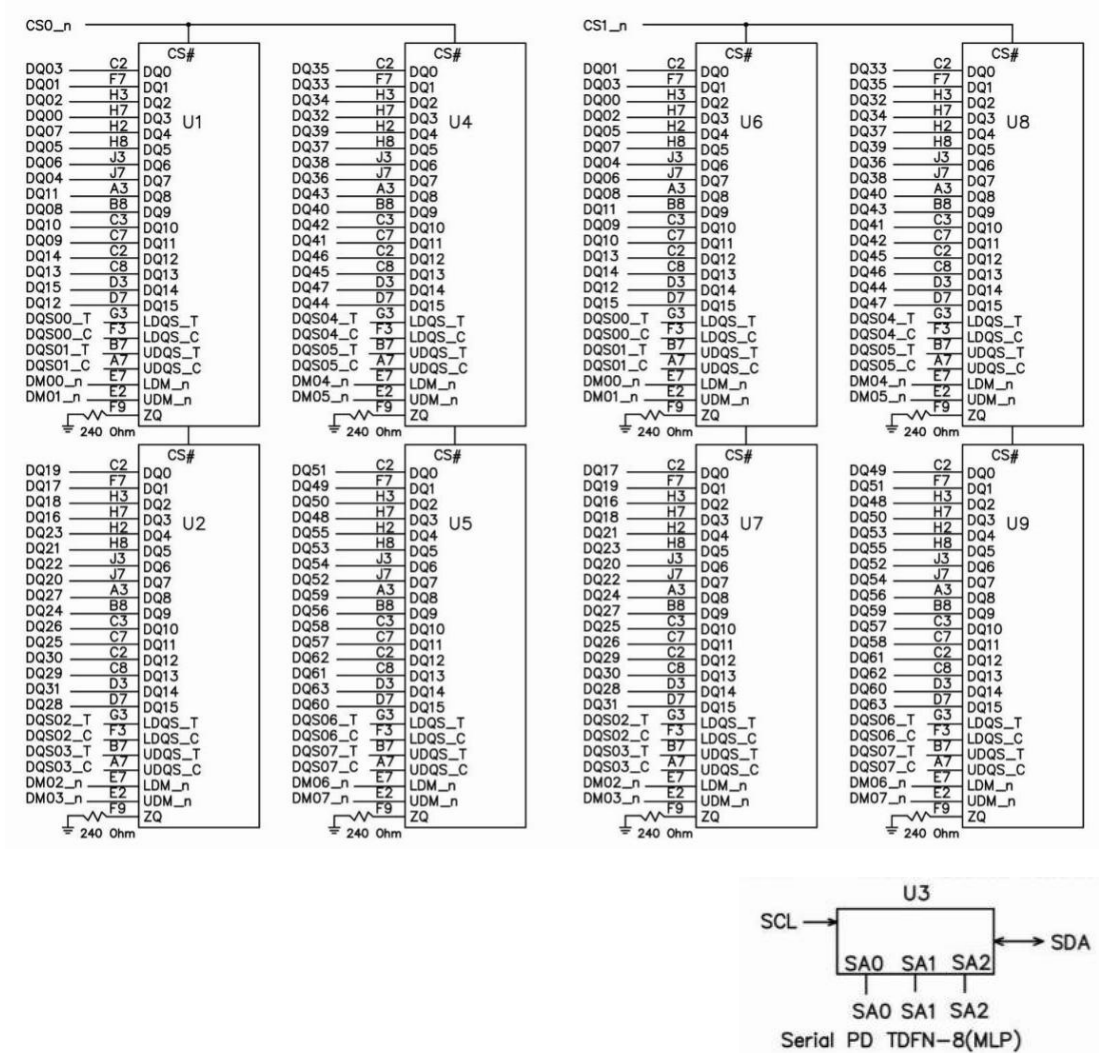

## 16. PCB Specifications


### General

1. Board size: 133.35 x 31.25 mm ± 0.15 mm
2. Thickness: 1.4 ± 0.1 mm
3. Pin count: 288 PIN

### PCB Material

1. RoHS
2. Glass Epoxy FR4, .UL 94V-0, BP ML or BP 4M-1

## 17. Module Dimensions

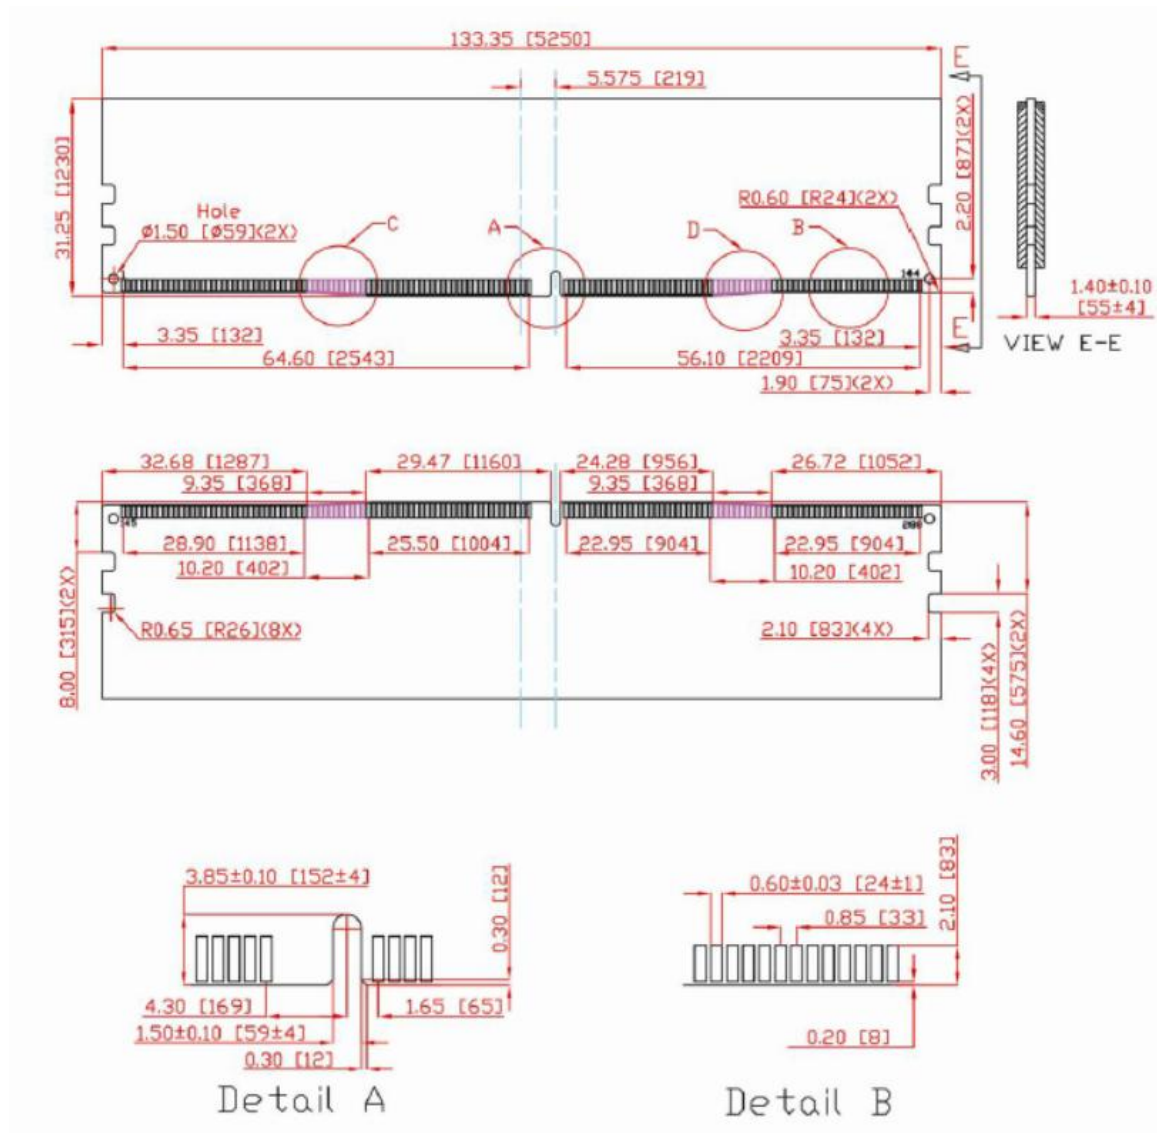

Units: millimeters