SCALE:2/1



Schematic Diagram of 2-Hole



Schematic Diagram of 3-Hole



Schematic Diagram of 4-Hole



Schematic Diagram of 5, 6-Hole



Schematic Diagram of 7、8、9-Hole

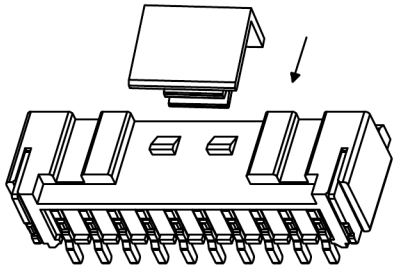



Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压：800V AC/分钟
Temperature range:-25℃-+85℃
温度范围：-25℃-+85℃
Insulation resistance:1000MΩ min
绝缘电阻：1000MΩ Min
Contact resistance:20mΩ Max
接触电阻：20mΩ Max

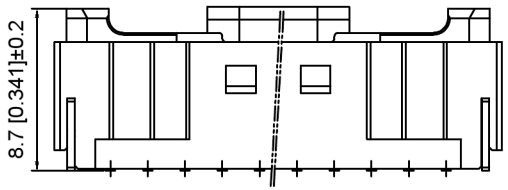

Schematic Diagram of 10,11,12,13,14,15-Hole



X2000 W V S - XX - 6T SN
① ② ③ ④ ⑤ ⑥ ⑦

1.Series No
2.Category:W-Wafer
3.Welding Board Angle:V-Stright 180°
4.Weding Way:S-SMT
5.Row No.Pin No:XX-02~15P
6.Material:6T-PA6T UL94V-0 Beige
7.Plating:SN-Tin Plated

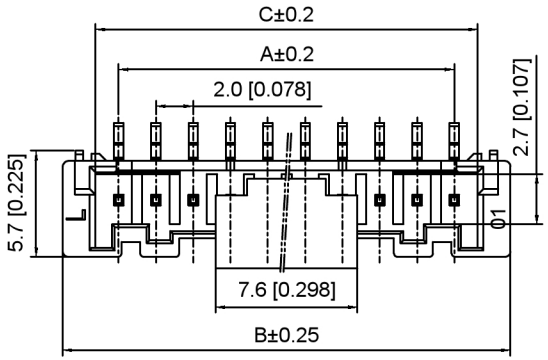

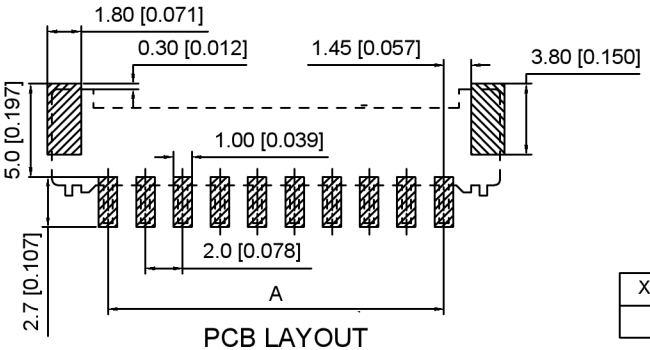

PCB LAYOUT

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	8.00	4.55	09	16.00	22.00	18.55
03	4.00	10.00	6.55	10	18.00	24.00	20.55
04	6.00	12.00	8.55	11	20.00	26.00	22.55
05	8.00	14.00	10.55	12	22.00	28.00	24.55
06	10.00	16.00	12.55	13	24.00	30.00	26.55
07	12.00	18.00	14.55	14	26.00	32.00	28.55
08	14.00	20.00	16.55	15	28.00	34.00	30.55

X2000WVS-XX-6TSN	PA6T	Brass	X2000H
PART N0	Material	Material(Pin)	Suitable XKB Housing

广东星坤科技股份有限公司
生效日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB

DSND		SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN		VIEW:	PART NO.: X2000WVS-XX-6TSN
CHKD		UNIT: mm/in	DWG NO.: X-X2000WVS-XX-6TSN
APPD		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0