



Poles	Dimensions (mm)	
	AB	
2x01	8.35	
2x02	12.05	5.70
2x03	17.75	11.40
2x04	23.45	17.10
2x05	29.15	22.80
2x06	34.85	28.50

Specifications:

Voltage rating: 600V AC / DC
Current rating: 16A AC / DC
Withstanding voltage: 2200V AC/minute
Temperature range: -40°C~+105°C
Insulation resistance: ≥1000M Ω
Contact resistance: ≤2mΩ
After environmental testing ： ≤10m Ω
Special No.: H-High conductive Brass

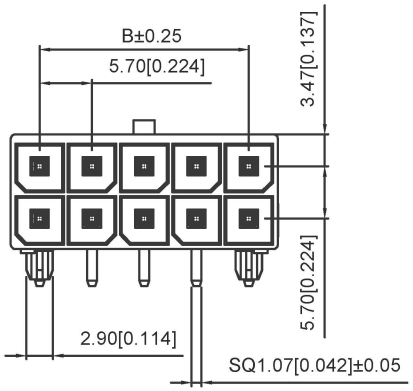

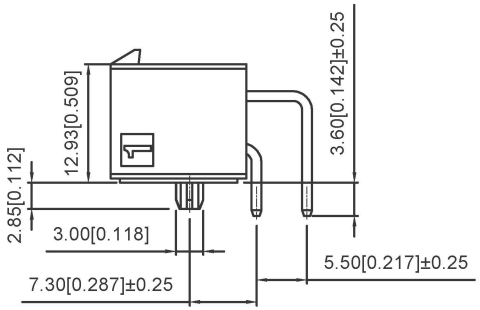

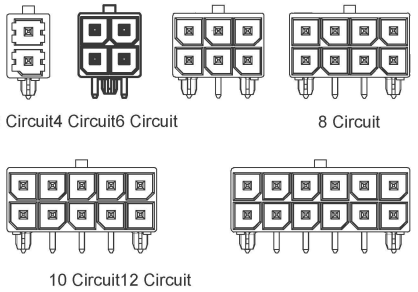

X5700 W R -2xXX -LP SW
① ② ③ ④ ⑤ ⑥

① Series No.
② Category： W-WAFER
③ Welding Board Angle ： R-Straight 90°
④ Row No.-Pin No.: 2xXX-2x02P~2x06P
⑤ Material: LP -LCP 94V-0
⑥ Plating Category: SW-Matte Tin Plating

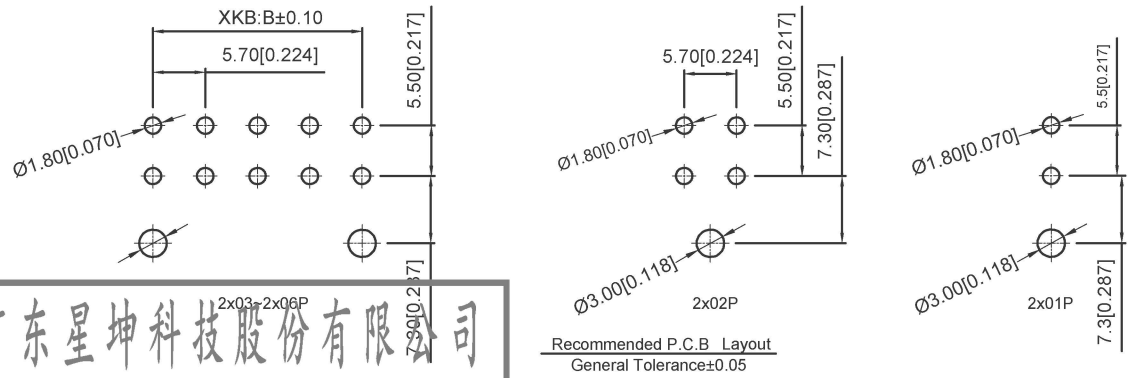

Recommended P.C.B Layout
General Tolerance±0.05

X5700WR-2xXX-LPSW	High conductive Brass	X5700H	X5700T
PART N0	Material	Suitble XKB Terminal	Suitble XKB Terminal

广东星坤科技股份有限公司
生效日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	
APPD		DATE		SIZE: A4	DWG NO.: X5700WR-2xXX-LPSW

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn