


### Features

- Ultra low leakage: nA level
- Operating voltage: 5V
- Low clamping voltage
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge:  $\pm 30\text{kV}$
    - Contact discharge:  $\pm 30\text{kV}$
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning) 4.5A (8/20 $\mu\text{s}$ )
- RoHS Compliant

### Dimensions DFN1006



### Pin Configuration



### Applications

- Smart phones
- Display Ports
- MDDI Ports
- USB Ports
- Digital Video Interface (DVI)
- PCI Express and Serial SATA Ports

### Mechanical Characteristics

- Package: DFN1006
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel: 10,000pcs
- Reel Size: 7 inch
- Device Marking: 21


### Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

| Parameter                              | Symbol           | Value       | Unit |
|--|------------------|-------------|------|
| Peak Pulse Power (8/20 $\mu\text{s}$ ) | Ppp              | 110         | W    |
| ESD per IEC 61000-4-2 (Air)            | V <sub>ESD</sub> | $\pm 30$    | Kv   |
| ESD per IEC 61000-4-2 (Contact)        |                  | $\pm 30$    |      |
| Operating Temperature Range            | T <sub>J</sub>   | -55 to +150 | °C   |
| Storage Temperature Range              | T <sub>STJ</sub> | -55 to +150 | °C   |


## Electrical Characteristics (TA=25°C unless otherwise specified)

| Parameter               | Symbol    | Test Condition                         | Min | Typ  | Max | Unit    |
|-------------------------|-----------|--|-----|------|-----|---------|
| Reverse Working Voltage | $V_{RWM}$ |  |     |      | 5   | V       |
| Breakdown Voltage       | $V_{BR}$  | $I_T = 1mA$                            | 6   |      |     | V       |
| Reverse Leakage Current | $I_R$     | $V_{RWM} = 5V$                         |     |      | 0.5 | $\mu A$ |
| Clamping Voltage        | $V_C$     | $I_{PP} = 1A$ (8 x 20 $\mu s$ pulse)   |     |      | 12  | V       |
| Clamping Voltage        | $V_C$     | $I_{PP} = 4.5A$ (8 x 20 $\mu s$ pulse) |     |      | 23  | V       |
| Junction Capacitance    | $C_J$     | $V_R = 0V, f = 1MHz$                   |     | 0.22 |     | pF      |


Typical Performance Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise Specified)

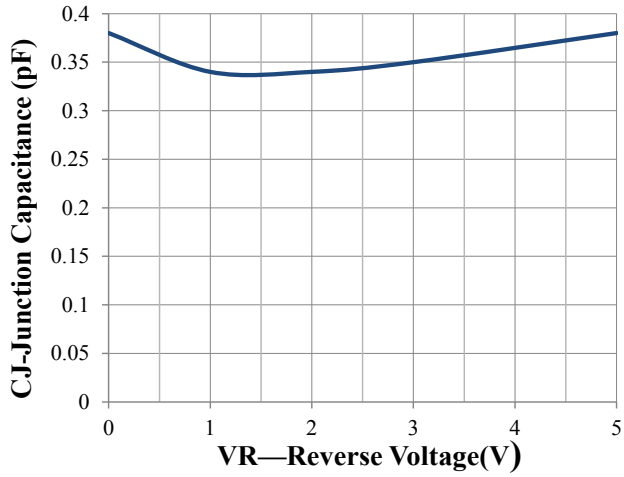


Junction Capacitance vs. Reverse Voltage

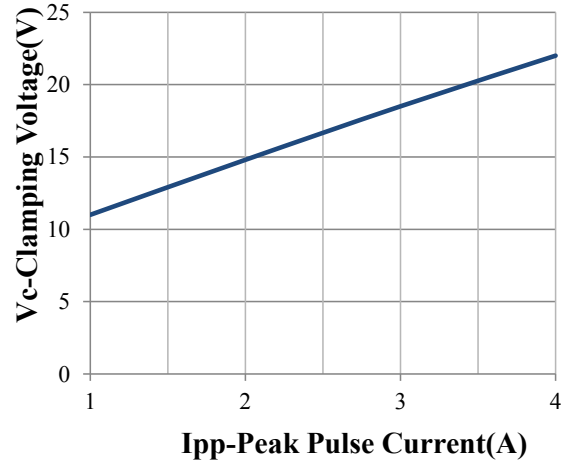


Clamping Voltage vs. Peak Pulse Current

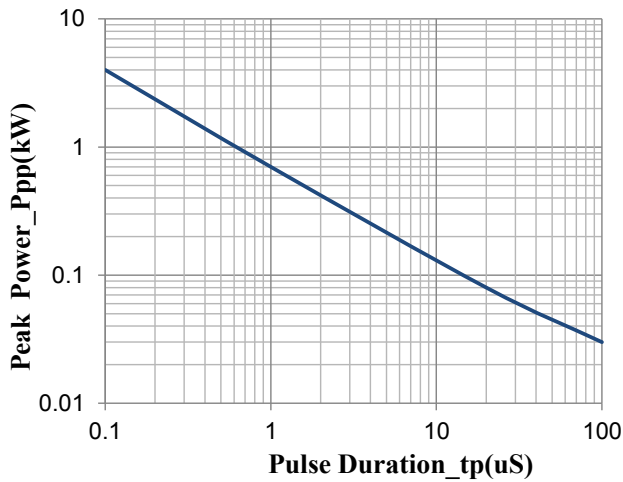


Peak Pulse Power vs. Pulse Time

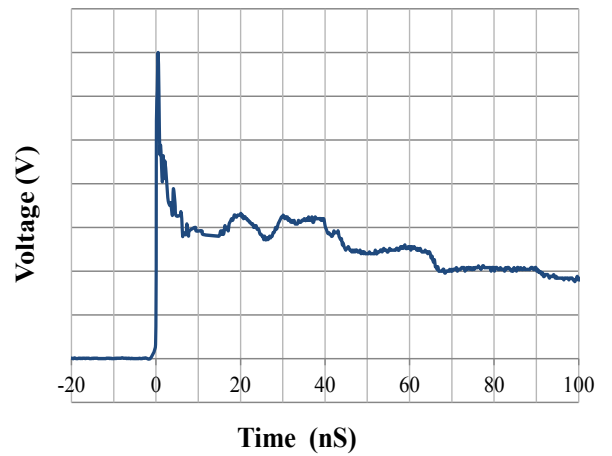

IEC61000-4-2 Pulse Waveform

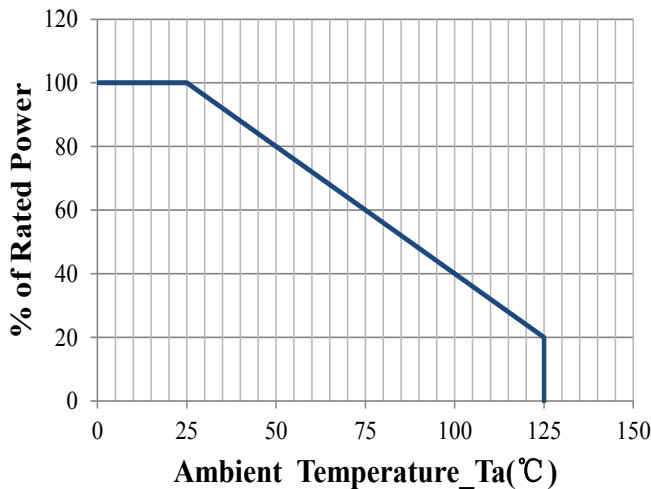


Power Derating Curve

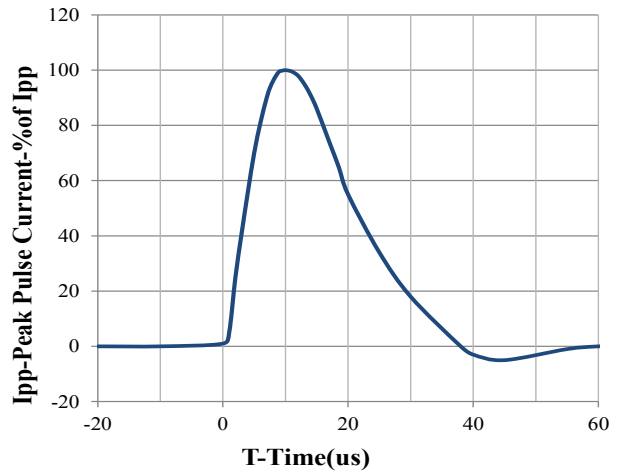


8 X 20us Pulse Waveform

## DFN1006 Package Outline Drawing

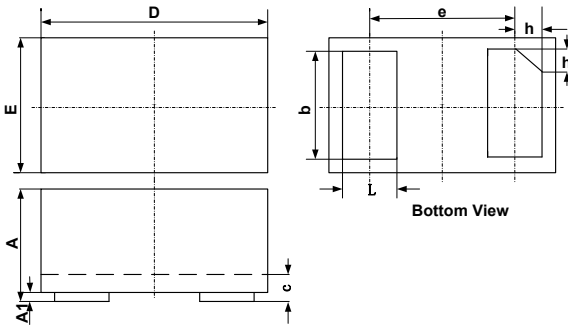

| SYM | DIMENSIONS  |      |      |           |       |       |
|-----|-------------|------|------|-----------|-------|-------|
|     | MILLIMETERS |      |      | INCHES    |       |       |
|     | MIN         | NOM  | MAX  | MIN       | NOM   | MAX   |
| A   | 0.45        | 0.50 | 0.55 | 0.018     | 0.020 | 0.022 |
| A1  | 0.00        | 0.02 | 0.05 | 0.000     | 0.001 | 0.002 |
| b   | 0.45        | 0.50 | 0.55 | 0.018     | 0.020 | 0.022 |
| c   | 0.12        | 0.15 | 0.18 | 0.005     | 0.006 | 0.007 |
| D   | 0.95        | 1.00 | 1.05 | 0.037     | 0.039 | 0.041 |
| e   | 0.65 BSC    |      |      | 0.026 BSC |       |       |
| E   | 0.55        | 0.60 | 0.65 | 0.022     | 0.024 | 0.026 |
| L   | 0.20        | 0.25 | 0.30 | 0.008     | 0.010 | 0.012 |
| h   | 0.07        | 0.12 | 0.17 | 0.003     | 0.005 | 0.007 |

## Suggested Land Pattern

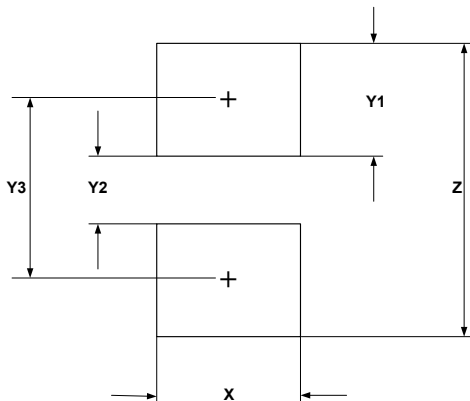

| SYM | DIMENSIONS  |        |
|-----|-------------|--------|
|     | MILLIMETERS | INCHES |
| X   | 0.60        | 0.024  |
| Y1  | 0.50        | 0.020  |
| Y2  | 0.30        | 0.012  |
| Y3  | 0.80        | 0.032  |
| Z   | 1.30        | 0.052  |