CAD FILE:

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
2. 锁扣窗口：2～3PIN为1个，≥4PIN为2个.(Lock Configuration: 2 to 3Pin is 1, ≥4Pin is 2)
3. 不同Pin位吸盖加入/取出力有差异，实属正常现象.
(It is normal that there are differences between suction cap and suction cap at different Pin positions)
4. 温度范围(Temperature range)：-65° C～125° C.
5. 额定电压(Rated voltage)：125V，AC/DC(=等效).
6. 接触电阻(Contact resistance)：≤0.02Ω.
7. 绝缘电阻(Insulation resistance):≥100MΩ
8. 产品料号(Product material No.)：

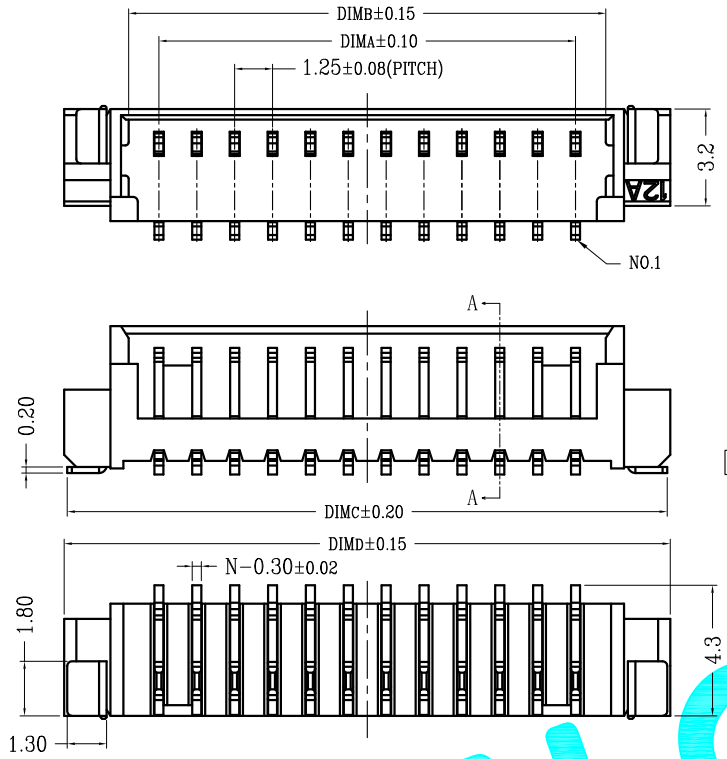

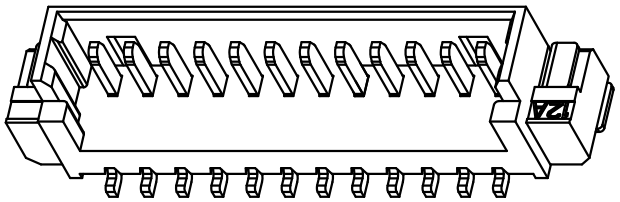





SECTION A-A

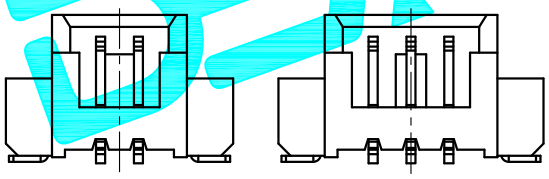

2 PIN　　3 PIN

LOCK CONFIGURATION (锁扣位置)

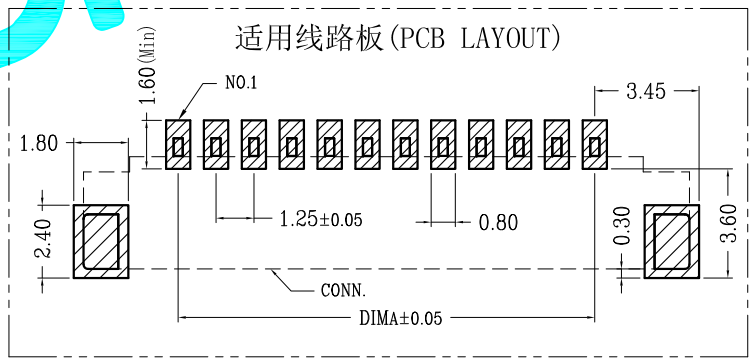

CKT	DIM A	DIM B	DIM C	DIM D
2	1.25	3.25	7.30	7.50
3	2.50	4.50	8.55	8.75
4	3.75	5.75	9.80	10.00
5	5.00	7.00	11.05	11.25
6	6.25	8.25	12.30	12.50
7	7.50	9.50	13.55	13.75
8	8.75	10.75	14.80	15.00
9	10.00	12.00	16.05	16.25
10	11.25	13.25	17.30	17.50
11	12.50	14.50	18.55	18.75
12	13.75	15.75	19.80	20.00
13	15.00	17.00	21.05	21.25
14	16.25	18.25	22.30	22.50
15	17.50	19.50	23.55	23.75
16	18.75	20.75	24.80	25.00
17	20.00	22.00	26.05	26.25
18	21.25	23.25	27.30	27.50
19	22.50	24.50	28.55	28.75
20	23.75	25.75	29.80	30.00

———	A	———	NEW	———	———	———
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

APPROVALS		DATE
DRAWN	G.M.Chen	2015/7/17
CHECKED		
APPROVALS		

DEALON德之隆®
ELECTRONICS CO.,LTD

TOLERANCES ARE	30~以上	±0.30	ANGLE	
	10~30	±0.20		
	5~10	±0.15	±2°	
	~ 5	±0.10		

TITLE:	1.25 Pitch 立式	
PART NO.	1.25-口口PS	
UNIT: mm	SCALE: 1:1	SHEET 1 OF 1
DRAWING NO.	———	PROJ:

DEALON德之隆®