

## 6MHz, Rail-to-Rail I/O CMOS Op Amps

### 概述

HT1374、HT2374 和 HT4374 分别是单通道、双通道和四通道、轨到轨输入和输出、单电源放大器，具有极低的失调电压和宽信号带宽。这些放大器采用新型专利微调技术，无需激光微调便可达到出色的性能。所有器件均可采用 3 V 至 5 V 单电源供电。低失调、极低的输入偏置电流和高速度特性相结合，使这些放大器适合各种应用。滤波器、积分器、二极管放大器、分流传感器和高阻抗传感器等器件均可受益于这些特性组合。宽带宽和低失真特性则有益于音频和其它交流应用。

### 产品特性

低失调电压: **500uV**(最大值) 单电源供电: **2.7 V 至 5.5 V**

低电源电流: 每个放大器 **380uA** 宽带宽: **6 MHz**

压摆率: **5 V/ us**

低失真

无相位反转

低输入电流

单位增益稳定

通过汽车应用认证

### 应用

电流检测

条形码扫描器

### PA 控制


电池供电仪器仪表

多极滤波器


传感器

**ASIC** 输入或输出放大器

音频

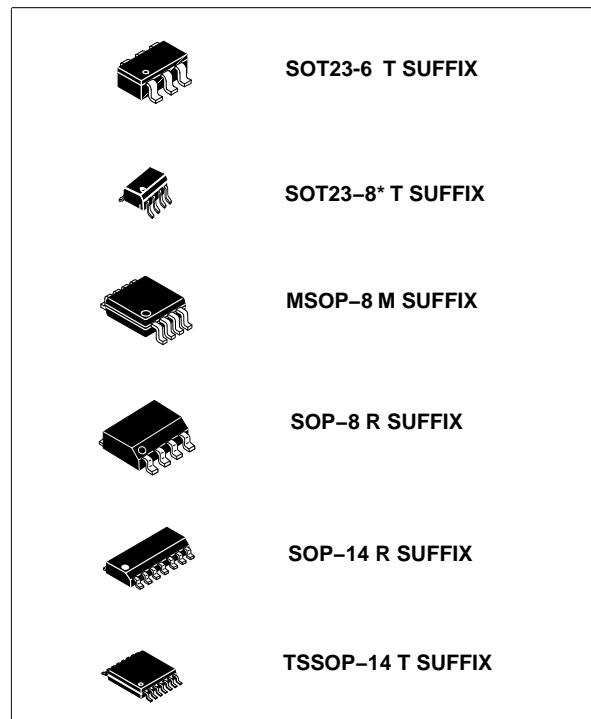

### 引脚配置

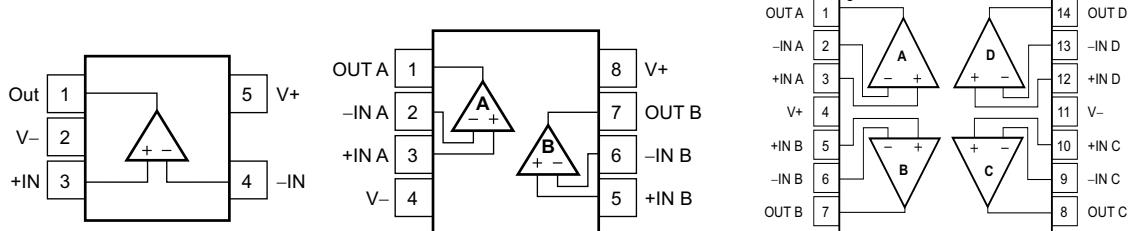

## Absolute Maximum Ratings

(If out of these ratings, the filter may be fail or damaged)

Table 1

Symbol	parameter	rating	units
VDD	Power supply	6	V
T <sub>A</sub>	Operating ambient Temperature Range	-40~+125	°C
T <sub>STG</sub>	Storage Temperature	-65~+150	°C

## Recommended Operating Conditions

Table 2

Symbol	parameter	rating	units
VDD	Power supply	2.5~5.5	V
T <sub>A</sub>	Operating ambient Temperature Range	-40~+125	°C

## Electrical Characteristics







Specifications are at  $T_A=+27^\circ\text{C}$ ,  $VDD=5\text{V}$ ,  $V_{CM}=V_{OUT}=VDD/2$ ,  $RL=10\text{Kohm}$ ,  $CL=100\text{pF}$

Symbol	Parameter	Spec			Units
		Min	Typ	Max	
V <sub>CC</sub>	Operating Supply Voltage	2.5	5	5.5	V
V <sub>OS</sub>	Input Offset Voltage	-1	+/-2	+4	mV
V <sub>OS_TC</sub>	Input Offset voltage Temp Drift		4		$\mu\text{V}/^\circ\text{C}$
en	Input Voltage Noise Density: f=1KHz		25		nV/VHz
C <sub>IN</sub>	Input Capacitance	Differential	1.5		pF
		Common Mode	3.0		
R <sub>IN</sub>	Input Resistance	>100			GΩ
I <sub>Q</sub>	Quiescent Current per Amplifier		330	590	uA
I <sub>out</sub>	Output Current		50		mA
V <sub>in_cm</sub>	Common mode Input voltage	0		VDD-0.1	V
V <sub>OL</sub>	Output Voltage from supply Swing		10		mV
CMRR	Common Mode Rejection Ratio		100		dB
I <sub>sc</sub>	Output short-circuit current		80		mA
PM	Phase Margin		65		°
GM	Gain Margin		-10		dB
GBWP	Gain-Bandwidth Product		6		MHz
PSRR	Power supply rejection ratio: 1Hz 1KHz		100 72		dB
t <sub>s</sub>	Settling time, 1.5V to 3.5V, Unity Gain: 0.1%		0.46		μs
SR	Slew Rate		3.7		μs
THD+Noise	Total Harmonic Distortion and Noise: f=1KHz		0.0007		%




## Typical performance characteristics




At  $T_A=+27^\circ\text{C}$ ,  $V_{dd}=5\text{V}$ ,  $V_{CM}=V_{OUT}=\text{VDD}/2$ ,  $RL=10\text{Kohm}$ ,  $CL=100\text{pF}$

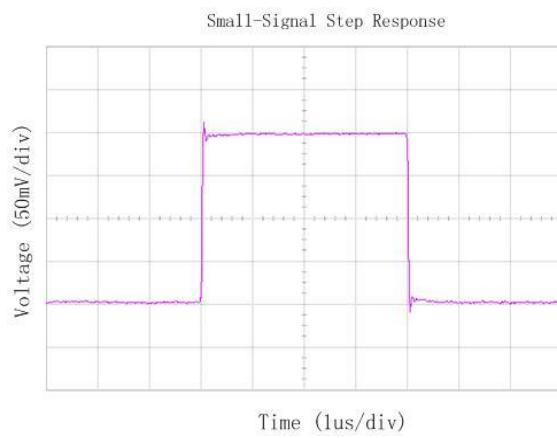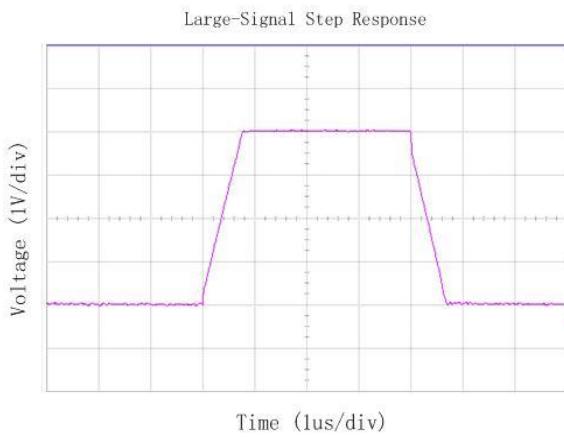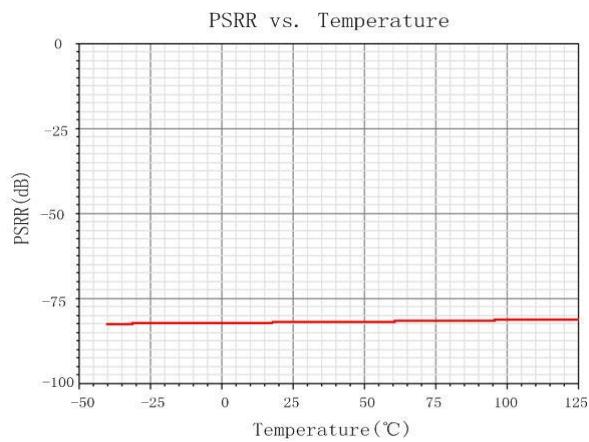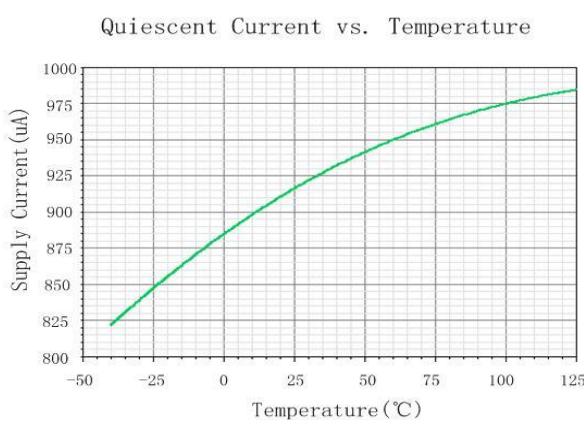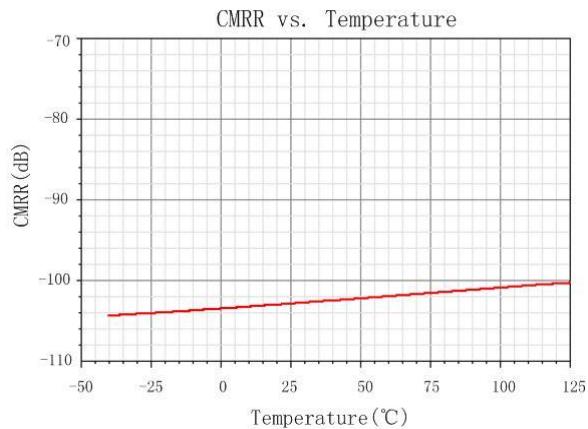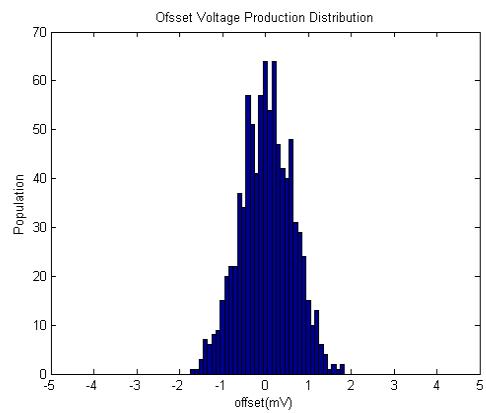

## Application Circuits



The HT2374 of operational amplifier can operate with power supply voltages from 2.5V to 5.5V. Each amplifier draws only 380uA quiescent current. The HT2374 can driver larger capacitive loads in unity-gain without oscillation. The unity-gain follower (buffer) is the most sensitive configuration to capacitive loading. When driving large capacitive loads with the HT2374 OPA, a small series resistor at the output improves the feedback loop's phase margin and stability by making the output load resistive at higher frequencies.

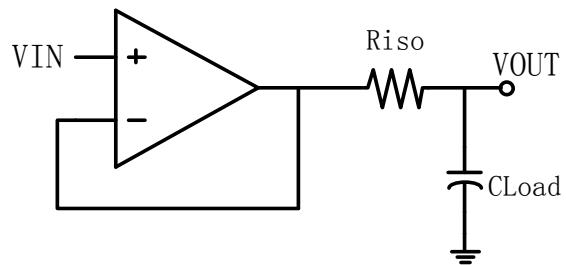

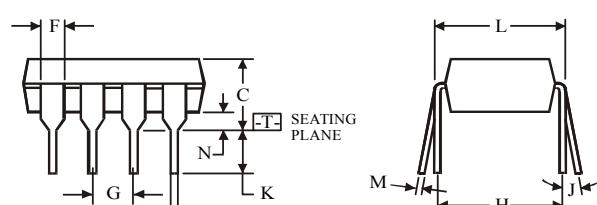**(DIP8)**

 $\oplus 0.25 \text{ (0.010) } \text{M} \text{ T}$ 
**NOTES:**

- Dimensions "A", "B" do not include mold flash or protrusions.  
Maximum mold flash or protrusions 0.25 mm(0.010) per side.

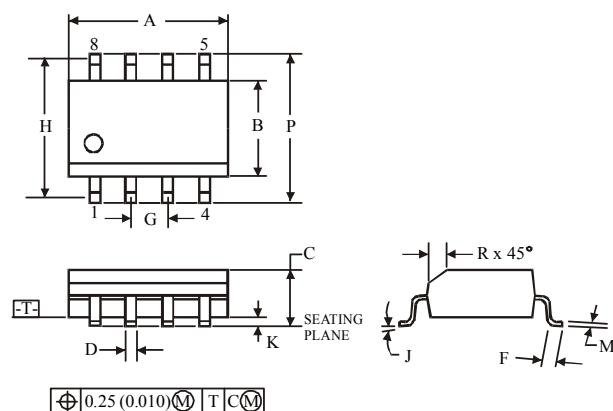
	Dimension, mm	
Symbol	MIN	MAX
<b>A</b>	8.51	10.16
<b>B</b>	6.1	7.11
<b>C</b>		5.33
<b>D</b>	0.36	0.56
<b>F</b>	1.14	1.78
<b>G</b>		2.54
<b>H</b>		7.62
<b>J</b>	0°	10°
<b>K</b>	2.92	3.81
<b>L</b>	7.62	8.26
<b>M</b>	0.2	0.36
<b>N</b>	0.38	

**(SOP8)**


	Dimension, mm	
Symbol	MIN	MAX
<b>A</b>	4.8	5
<b>B</b>	3.8	4
<b>C</b>	1.35	1.75
<b>D</b>	0.33	0.51
<b>F</b>	0.4	1.27
<b>G</b>		1.27
<b>H</b>		5.72
<b>J</b>	0°	8°
<b>K</b>	0.1	0.25
<b>M</b>	0.19	0.25
<b>P</b>	5.8	6.2
<b>R</b>	0.25	0.5


**NOTES:**


- Dimensions A and B do not include mold flash or protrusion.
- Maximum mold flash or protrusion 0.15 mm(0.006) per side  
for A; for B - 0.25 mm(0.010) per side.

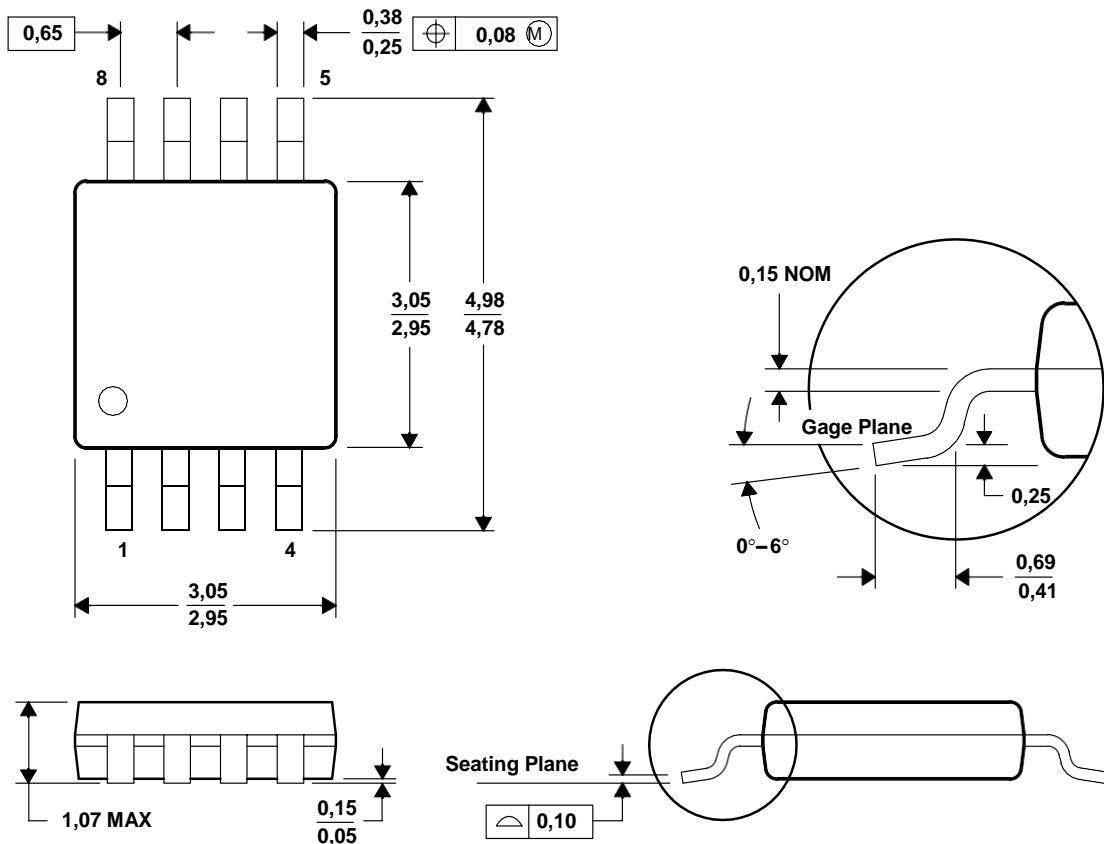**MSOP8**




TSSOP8

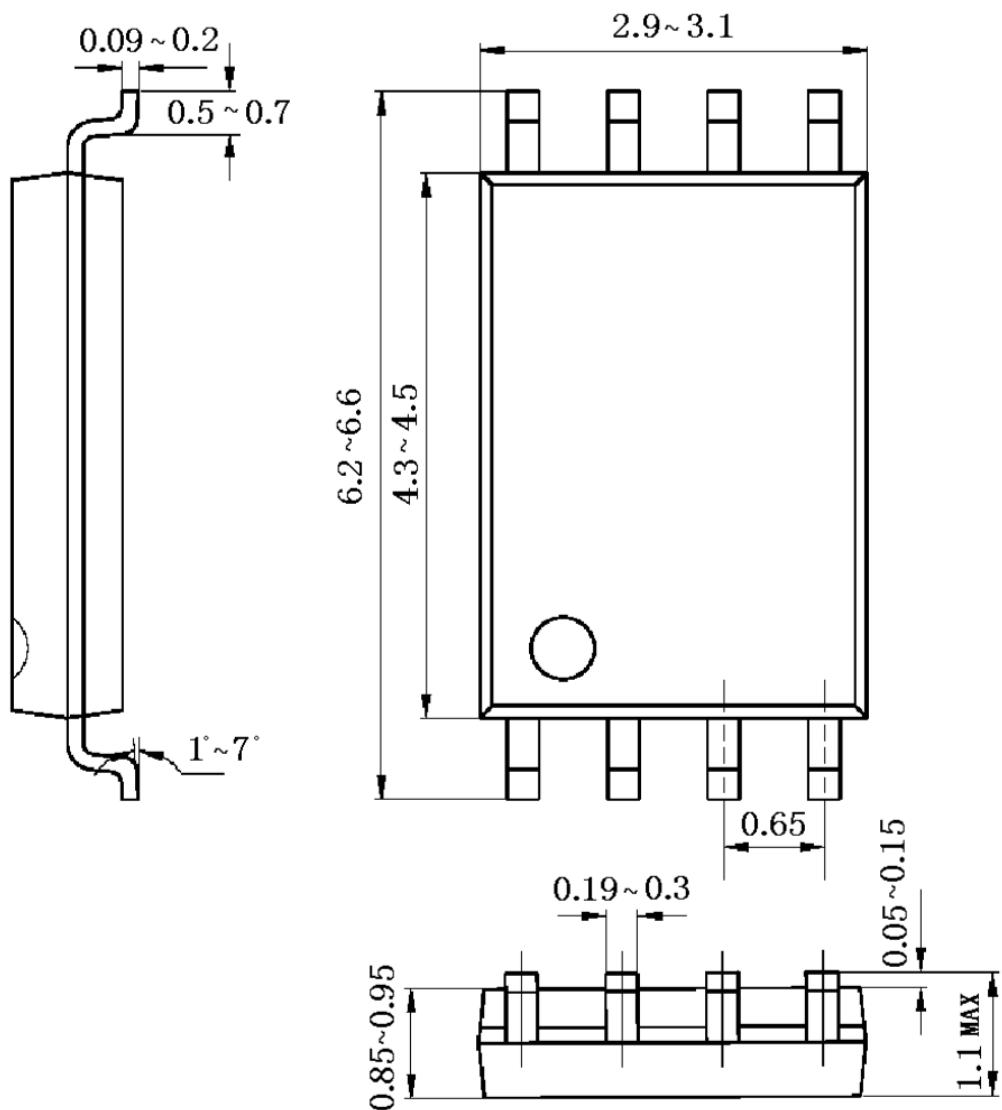

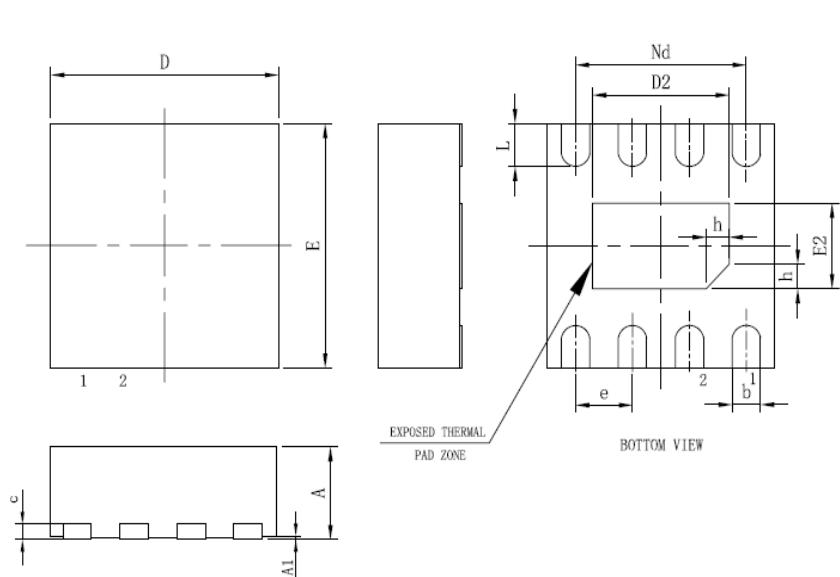**DFN-8L**


SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	—	0.02	0.05
b	0.18	0.25	0.30
c	0.18	0.20	0.25
D	1.90	2.00	2.10
D2	1.10	1.20	1.30
e	0.50BSC		
Nd	1.50BSC		
E	1.90	2.00	2.10
E2	0.60	0.70	0.80
L	0.30	0.35	0.40
h	0.15	0.20	0.25
载体尺寸 (mm)	63X39		

**SOT23-8L**
