

REVISIONS				
P	LTR	DESCRIPTION	DATE	APPRO
A		Initial Release	10OCT2017	V.G LY

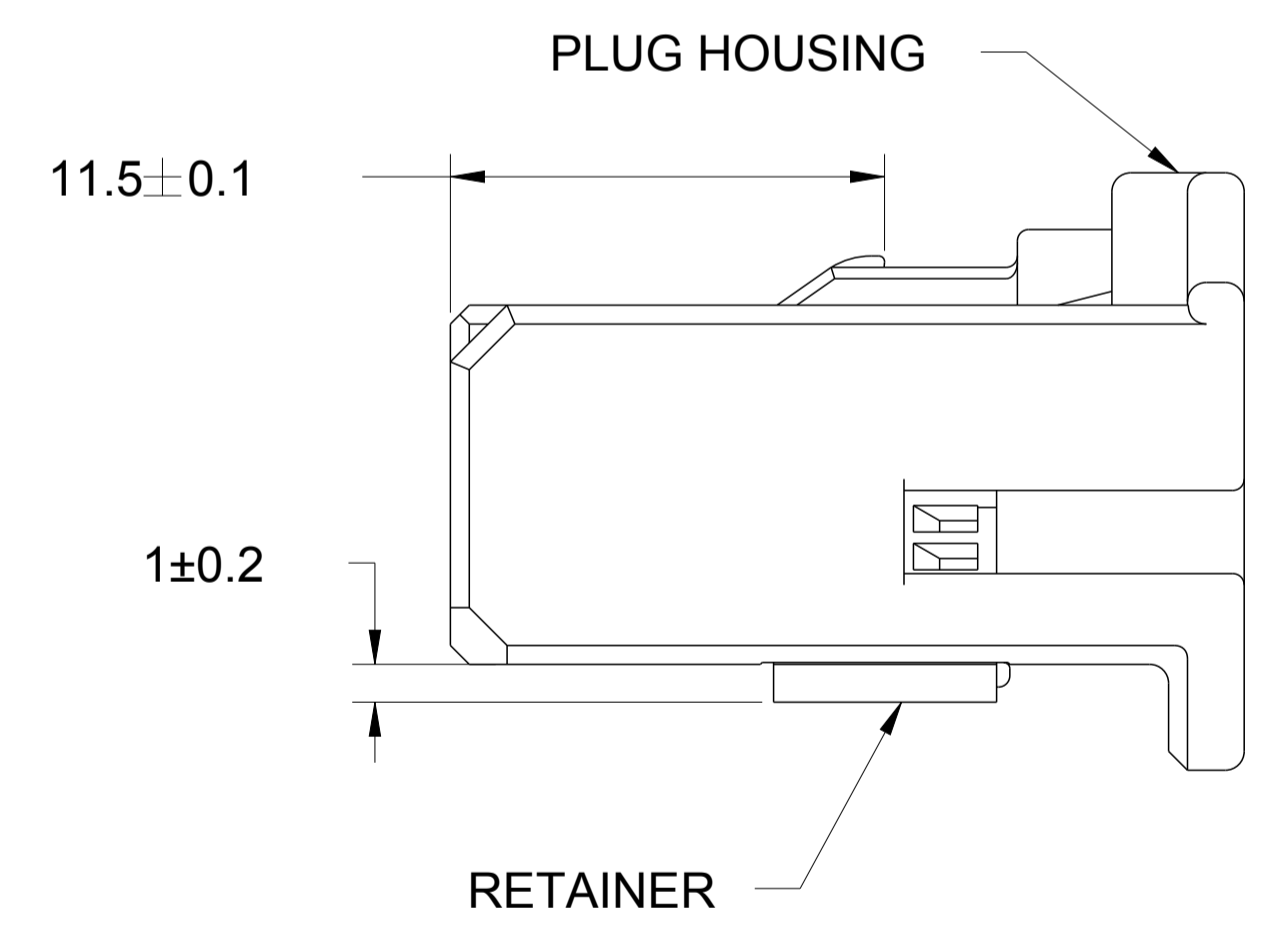
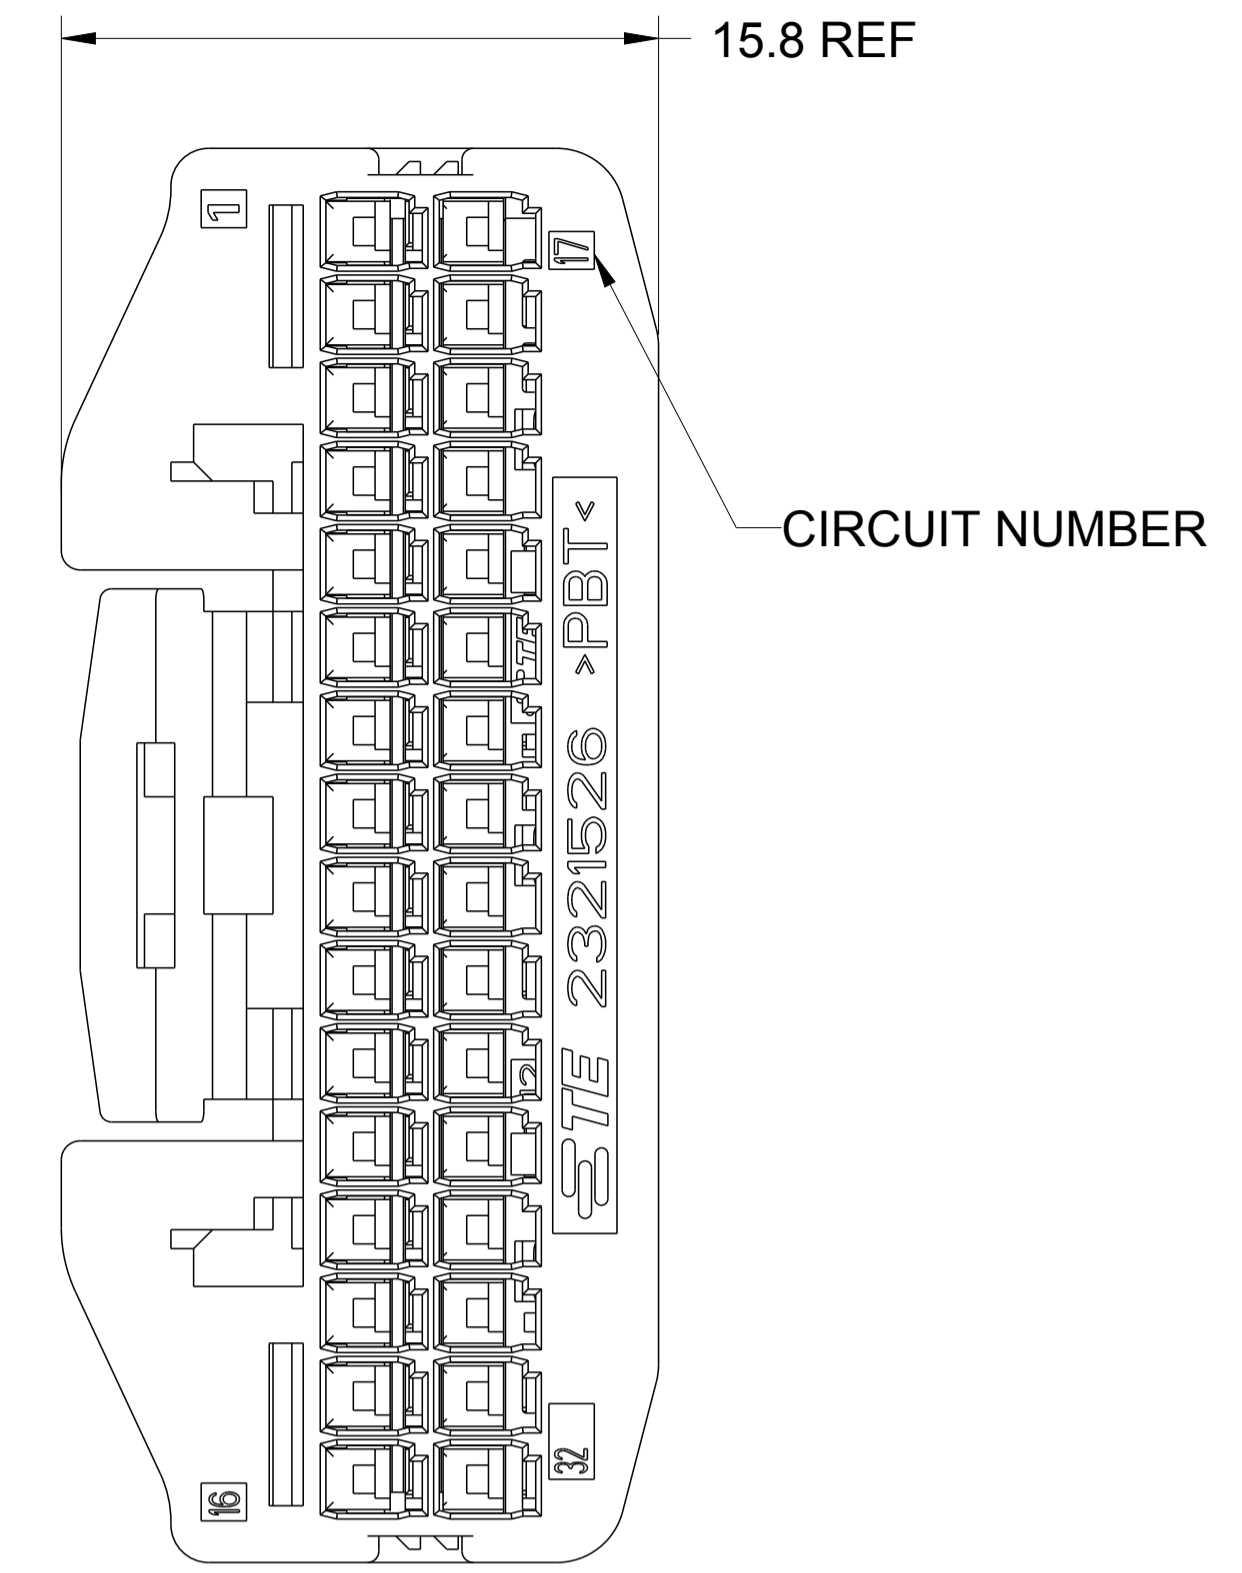
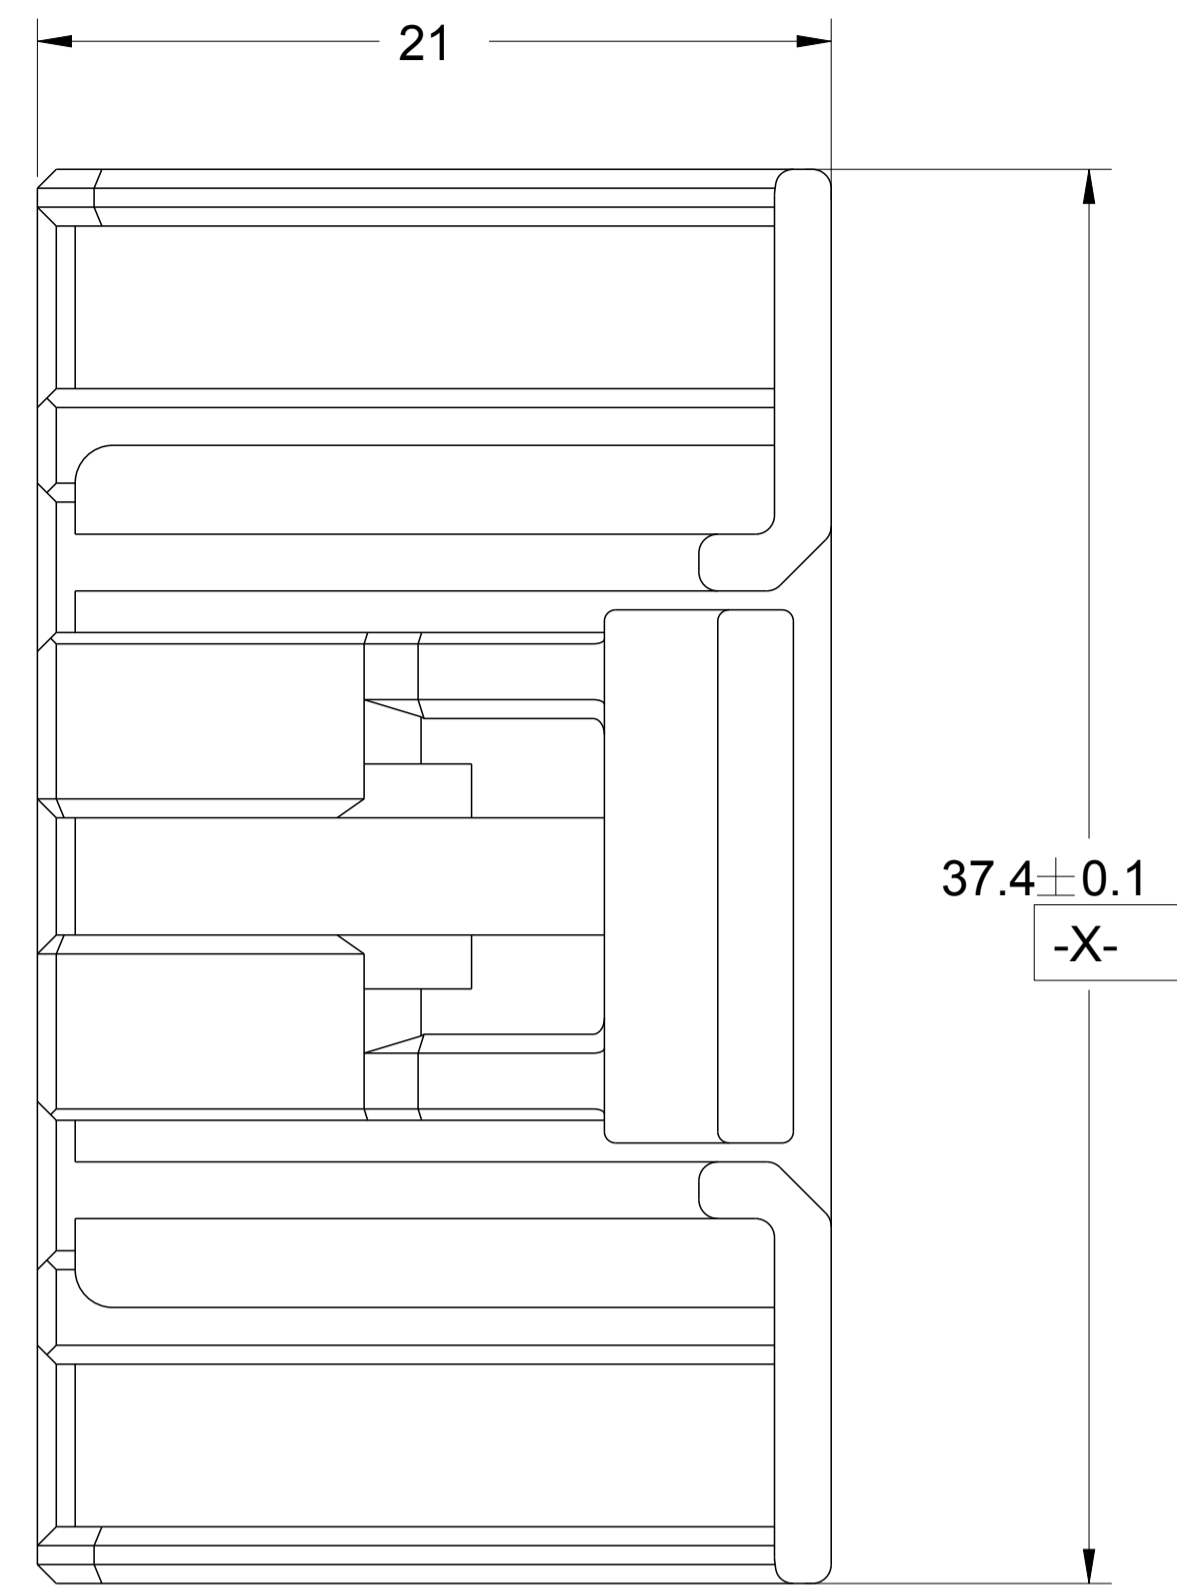
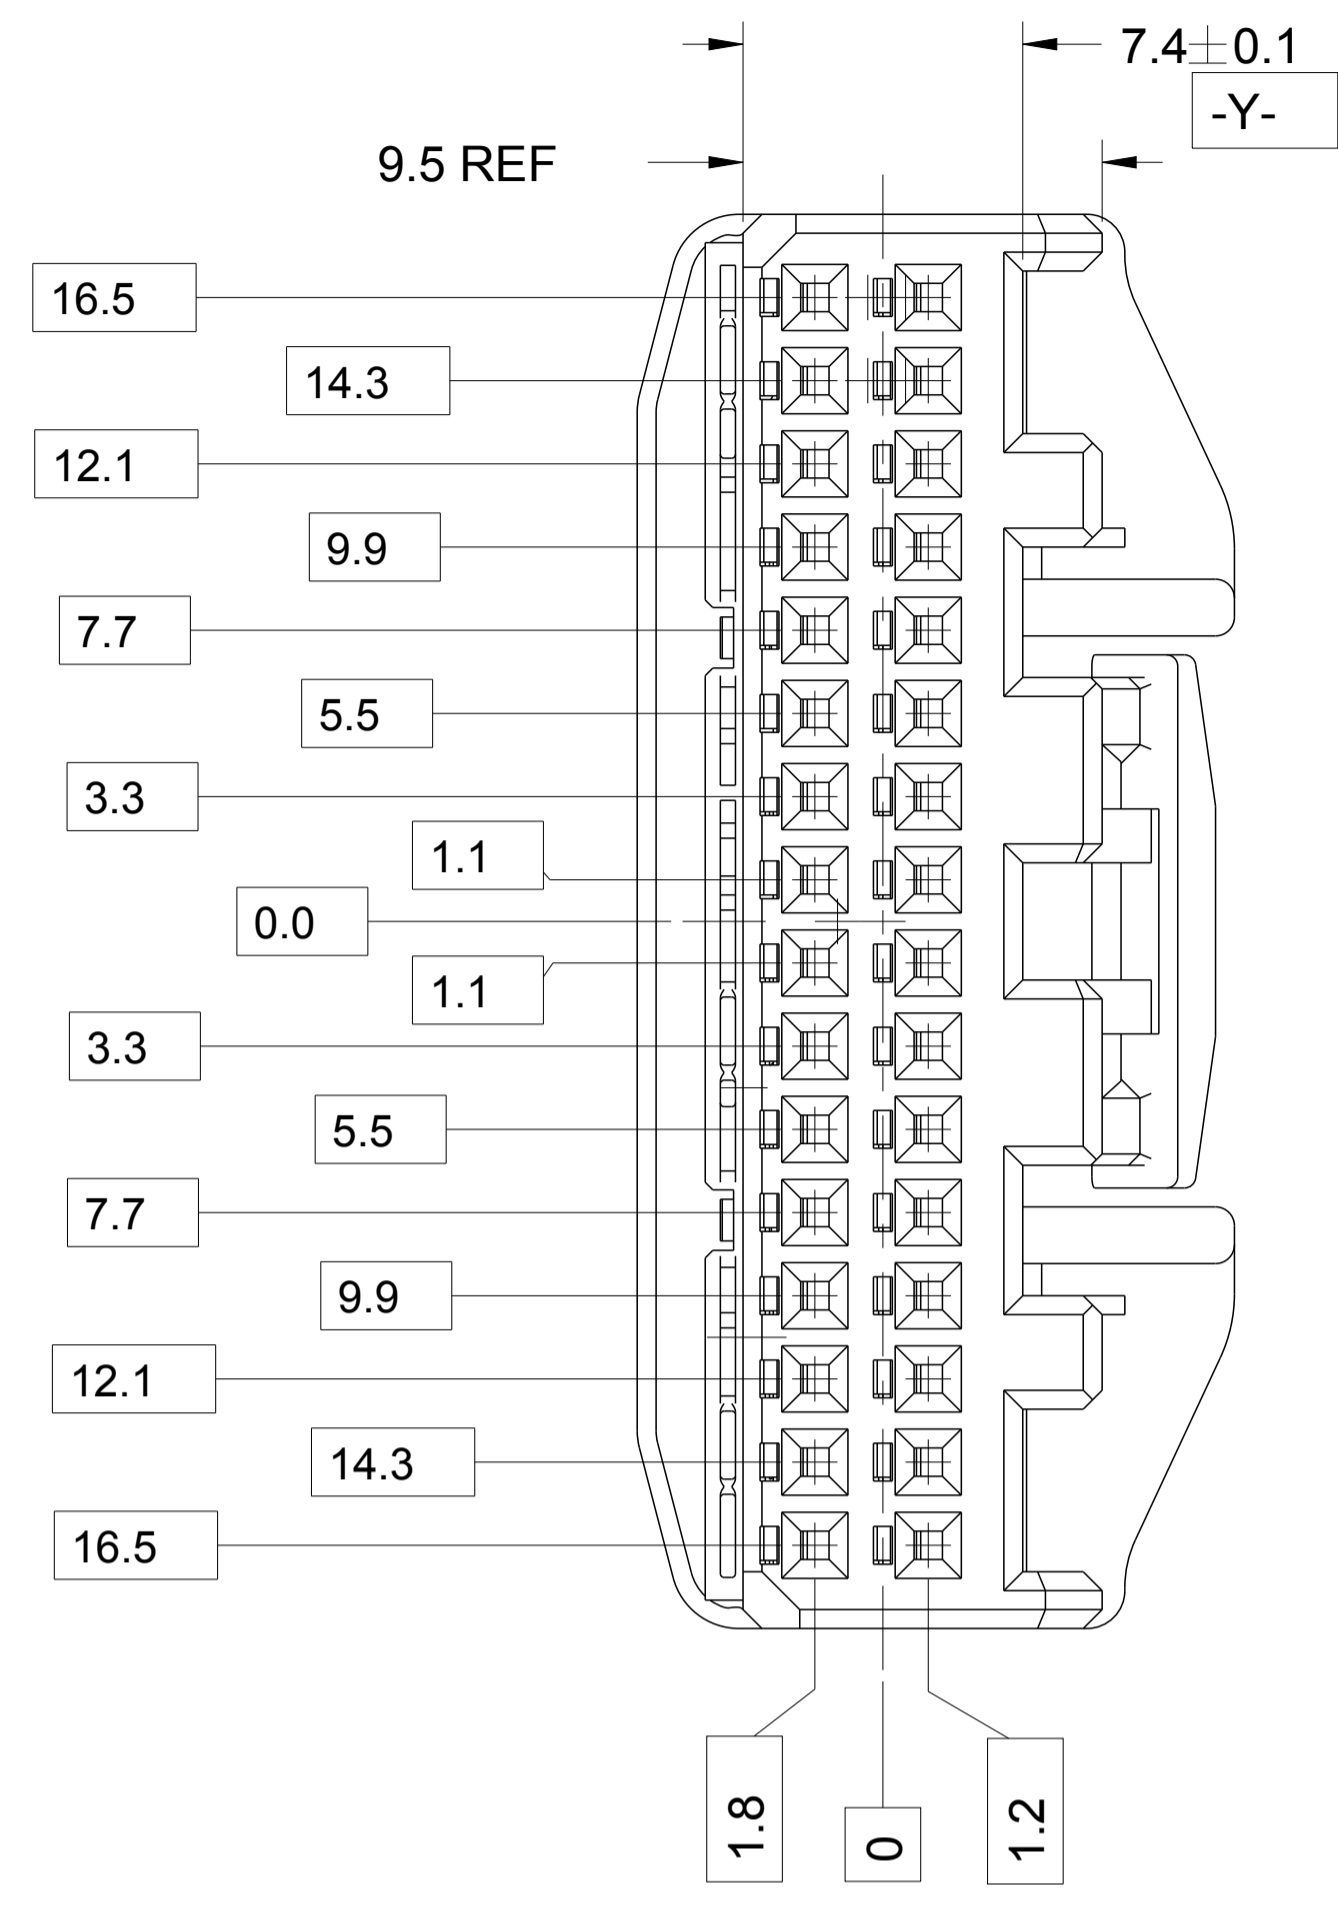


TABLE-1

POS	CAP ASSEMBLY
32	1318745-1

TABLE-2

		TERMINAL NO.	APPLICABLE WIRE RANGE
SIGNAL	TIN	1123343-1	AVSS/CAVUS/AVSSH-f 0.3~0.5mm <sup>2</sup> CAVS 0.22~0.5mm <sup>2</sup>

TABLE-3

PACKING STYLE	COLOR	PART NUMBER
PAPER BOX	BLACK	2321525-2
PAPER BOX	NATURAL	2321525-1
OUTER	INNER	

NOTES

- 1.RETAINER SHOULD BE SET TO THE PRE-ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER
- 2.THE RETENTION LATCH OF THE RETAINER MUST BE OUT SIDE OF PLUG HOUSING WHEN PRE-ASSEMBLY
- 3.RETAINER RETENTION FORCE FROM HOUSING:20N MIN
- 4.INSTRUCTION SHEET NO:411-5928
- 5.PART NUMBER OF CAP HOUSING TO BE MATED:SEE TABLE-1
- 6.APPLIED TERMINAL:SEE TABLE-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: 17SEP2017  
 V.G  
 CHK: 10OCT2017  
 SY.W  
 APVD: 10OCT2017  
 L.Y.N

TE Connectivity

NAME: 025 SERIES 32 POSITION PLUG HOUSING ASSEMBLY

SIZE: A1  
 CAGE CODE: 00779  
 DRAWING NO: 2321525

MATERIAL: PBT  
 FINISH: SEE TABLE

WEIGHT: 4.71g

CUSTOMER DRAWING

SCALE: 5:1  
 SHEET: 1 OF 1  
 REV: A