PRODUCT NO.	RoHS compliant
DSHP01TJGER	

REV.	ECN NO.	DR	DATE

NOTES :1.Specification:

1>.Operating force: 1000gf Max
2>.Operating Temperature: −40° to+85°
3>.Storage Temperature:: −40° to+85°
4>.Electricalife Life: 2000cycles 25mA 24VDC
5>.Mechanical Life: 3000cycles Operations

2. PLATING:
GOLD FLASH 1u"~2u" SOLDERTAIL,
1u"~3u"GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION :

DSHP XX T J G E R

- R [包装方式：T=管装 R=Reel]
- E [电镀层：E=接触部1u"~3u" 焊脚部1u"~2u"]
- G [G=镀全金 S=内镀金(接触部)外镀锡（焊脚部）]
- J [脚型：S脚 / J脚 / H脚 / A脚 / Z脚]
- T [T=低推贴胶 S=低推不贴胶 L=长推]
- XX [产品P数：02=2P 04=4P ..... 08=8P 10=10P]



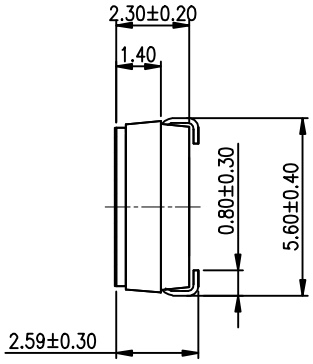





[Schematic]



(Construction)



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	1u"~3u" Gold
④	Terminal	Brass	1u"~2u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1u"~3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	东莞市广督实业有限公司 DongGuan Kingtek Industrial Co., Ltd.
LINER	ANGLES	COPY	
.0 ± 0.25	0. ± 2°	PROJECTION	TITLE: BY DSHP SERIES PITCH 1.27mm
.00 ± 0.15	.0 ± 1°		PRODUCT FAMILY: DSHP SERIES
.000± 0.10	.00± 0.5°		PRAT NO.: DSHP01TJGER
DESIGN: kathy		03/20/12'	FILE NO.: DSHP01TJGER−A
DRAWING			SIZE: A4 | UNIT: mm | SCALE: 2 : 1 | SHEET: 1OF1 | REV.: A
CHECK			
APPRO.			