



FR3A THRU FR3M

3.0AMP Surface Mount Fast Recovery Rectifiers


Features

- Deally Suited for Automatic Assembly
- Low Power Loss,High Efficiency
- For Use in Low Voltage Application
- Plastic Case Material has UL Flammability

Classification Rating 94V-0

Mechanical Data

- Case: Molded plastic SMB
- Terminals: Plated leads solderable per MIL-STD-750,Method 2026 guaranteed
- Polarity:Cathode Band or Cathode Notch
- Mounting Position: Any
- Making: Type Number

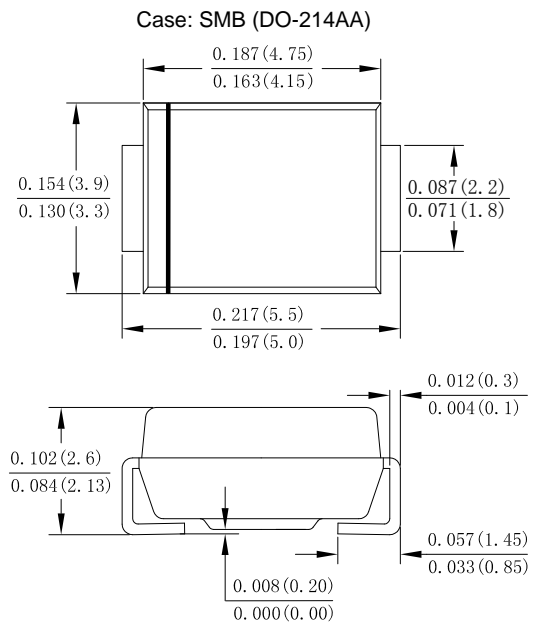

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	FR3A	FR3B	FR3D	FR3G	FR3J	FR3K	FR3M	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Average Rectified Output Current @ $T_L = 90^\circ C$	$I_{F(AV)}$	3.0							A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	110							A
Forward Voltage @ $I_F = 3.0A$	V_{FM}	1.3							V
Peak Reverse Current @ $T_A = 25^\circ C$	I_R	5.0							uA
At Rated DC Blocking Voltage @ $T_A = 125^\circ C$		100							
I^2t Rating for Fusing ($t < 8.3ms$)	I^2t	50.2							A^2s
Maximum Reverse Recovery Time(Note 1)	T_{rr}	150				250	500		ns
Typical Junction Capacitance (Note 2)	C_J	60				25			pF
Typical Thermal Resistance Junction to Ambient(Note 3)	$R_{\theta JA}$	95							$^\circ C/W$
Operating Temperature Range	T_J	-55 to +150							$^\circ C$
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ C$

Note:

- 1.Reverse Recovery Test Conditions: $I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A$.
2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C
3. 8.0MM² (.013mm Thick) Land Areas.



FR3A THRU FR3M

3.0AMP Surface Mount Fast Recovery Rectifiers

FIG.1 MAXIMUM AVERAGE FORWARD CURRENT DERATING

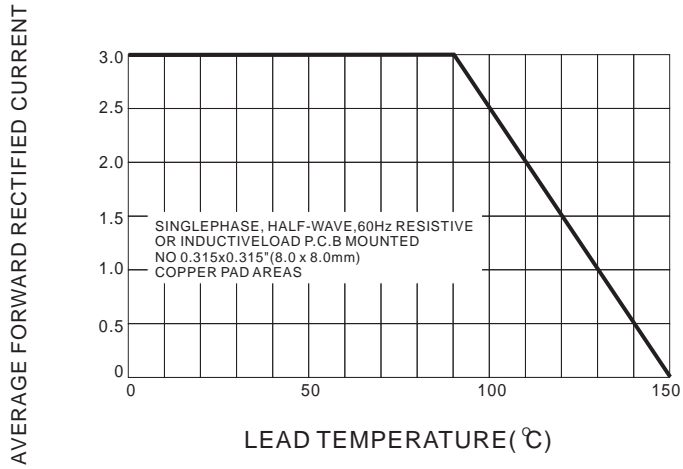


FIG.2 TYPICAL FORWARD CHARACTERISTICS


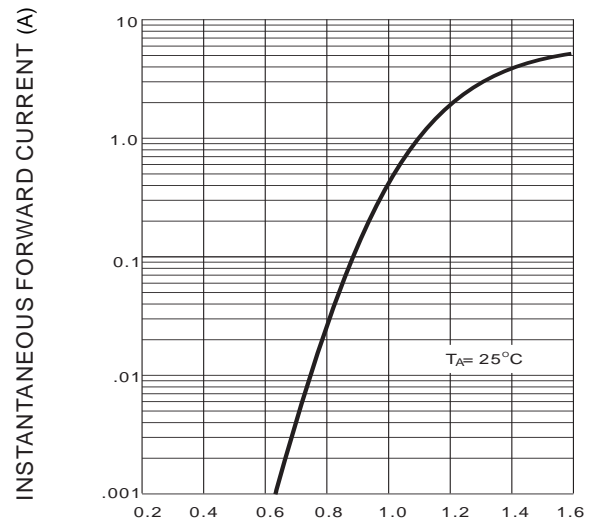


FIG.3 MAXIMUM NON-REPEITIVE SURGE CURRENT

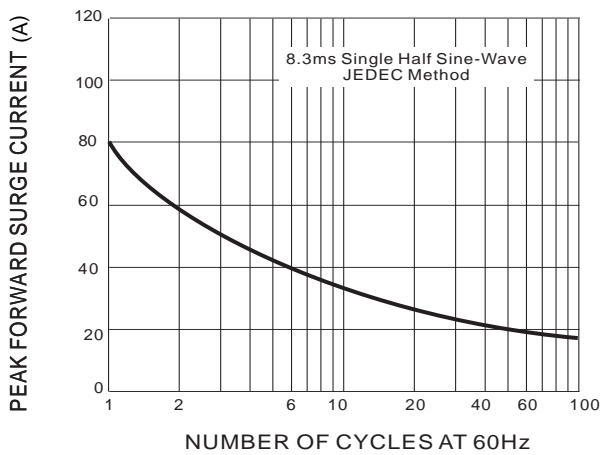

INSTANTANEOUS FORWARD VOLTAGE (V)

FIG.4 TYPICAL JUNCTION CAPACITANCE

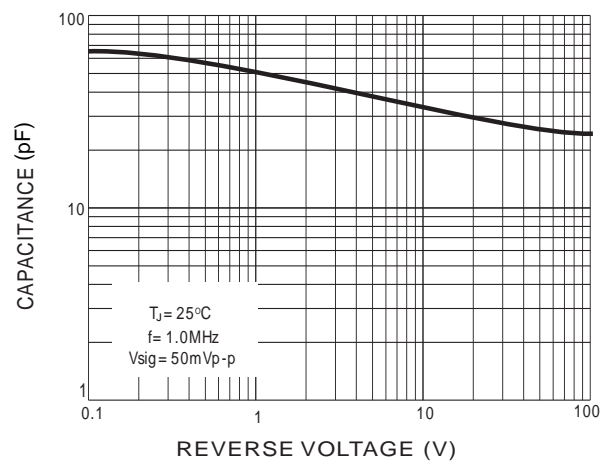


FIG.5 TYPICAL REVERSE CHARACTERISTICS


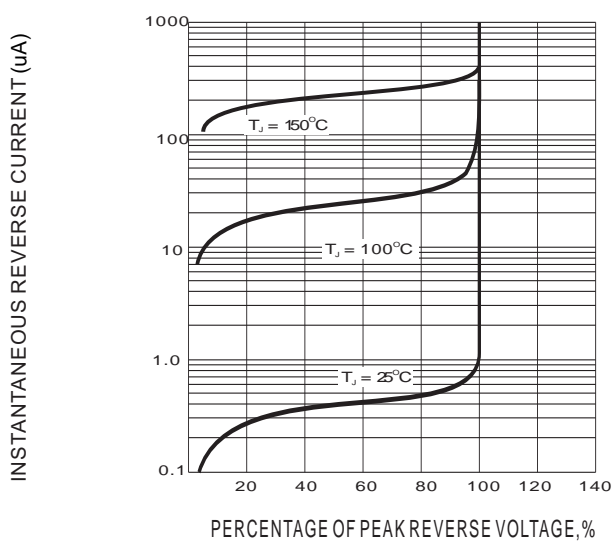


FIG.6 MOUNTING PAD LAYOUT



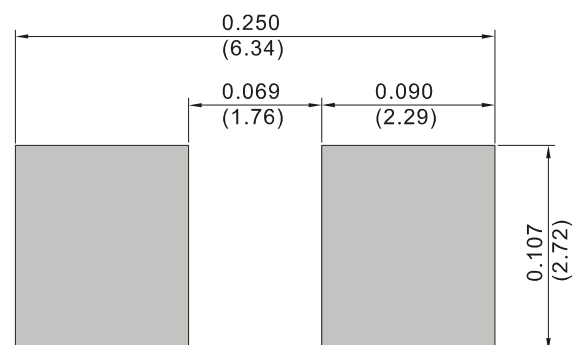

Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from XINNUO
- XINNUO reserves the right to make changes to this document and its products and specifications
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications.
XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown here in are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.