



DEQING HUAYING ELECTRONICS CO.,LTD.

APPROVAL SHEET

SAW BANDPASS FILTER PART NO.: NDFH057-2350SA

Product Type:		Customer:	
SAW Filter			
Part NO.:		Customer Part NO.:	
NDFH057-2350SA			
Ver. Ctrl.:		Issued Date:	
SFH057-2350SA-190305-v1.0			

PREPARED BY	CHECKED BY	APPROVED BY

Part No.	:	NDFH057-2350SA
Pages	:	8
Data	:	2019-03-05
Revision	:	SFH057-2350SA-190305-v1.0

Add (Deqing): 188 Zhiyuan North Rd.Wukang Town Deqing County Zhejiang Province 313200,P.R.China
Phone : +86-572-8281127
Fax : +86-572-8281298
E-mail : sales@dquaying.com
Website : <http://www.dquaying.com>

Revision	Date	Description	Remark
SFH057-2350SA-190305-v1.0	2019-03-05	First draft	


Features

SAW filter for Band 40 Rx.

- 1 High stability and reliability with good performance..
- 2 Single ended to Single ended.
- 3 Narrow and sharp pass band characteristics. RoHS compatible.
- 4 Low insertion loss and deep stop band attenuation for interference.
- 5 Useable Pass band 100MHz.
- 6 Package size 1.1mm*0.9mm

Package Dimensions


Ceramic Package: Unit: mm

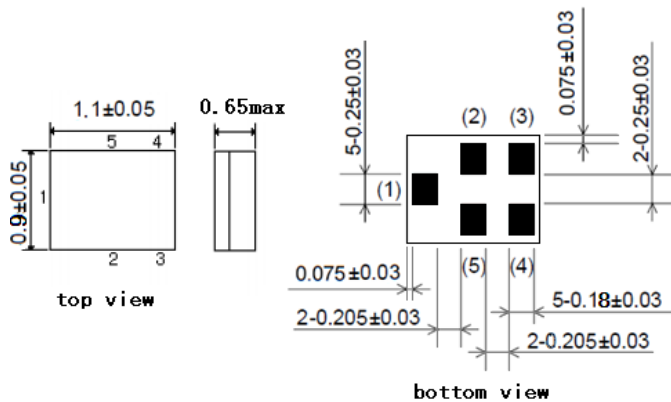

Pin Configuration

1	Input
4	Output
2,3,5	Ground

Marking



Top View, Laser Marking

"bF" Part number

"." Dot marking, indicates input 1

" 1" Terminal1

The first " * ": Month Code (The code shown below varies in a 4-year-cycle)

Month	1	2	3	4	5	6	7	8	9	10	11	12
2016/2020	n	p	q	r	s	t	u	v	w	x	y	z
2017/2021	A	B	C	D	E	F	G	H	J	K	L	M
2018/2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019/2023	a	b	c	d	e	f	g	h	i	j	k	m

The second " * ": Date Code

data	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	
code	A	B	C	D	E	F	G	H	J	K	
data	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
code	L	M	N	P	Q	R	S	T	U	V	
data	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
code	W	X	Y	Z	a	b	d	e	f	g	h

Maximum Ratings

Rating		Value	Unit
DC Voltage (between any Terminals)	V_{DC}	10	V
RF Power (in BW)	P	13	dBm
Operating Temperature Range	T_A	-30 ~ +85	°C
Storage Temperature Range	T_{stg}	-40 ~ +85	°C
Moisture Sensitivity Levels	MSL	2A	

Electrical Characteristics:


Item		Minimum	Typical	Maximum	Unit				
Center Frequency	f_c		2350		MHz				
Insertion Loss @2300 2400 MHz	IL		1.6	2.7	dB				
			1.6	2.3*)	dB				
Passband Ripple @2300 2400 MHz	Pr		0.8	1.5	dB				
Input VSWR @2300 2400 MHz	V_{swr}		1.6	2.0					
Output VSWR @2300 2400 MHz	V_{swr}		1.4	2.0					
Absolute Attenuation	α								
						50 1574.00 MHz	20	25	dB
						1574 1577.00 MHz	20	25	dB
						1577.00 1680.00 MHz	20	24	dB
						1845.00 1880.00 MHz	18	22	dB
						2110.00 2170.00 MHz	19	23	dB
						4600.00 4800.00 MHz	36	41	dB
						6900.00 7200.00 MHz	13	18	dB
Input / Output Impedance (Nominal)		50			Ω				

 RoHS Compliant


 Electrostatic Sensitive Device

*) : 23°C-27°C


Test Circuit

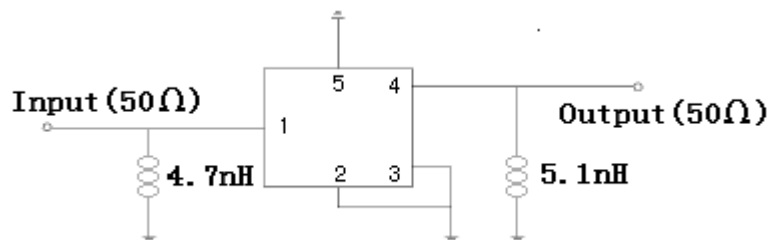


Typical Frequency Response
S21

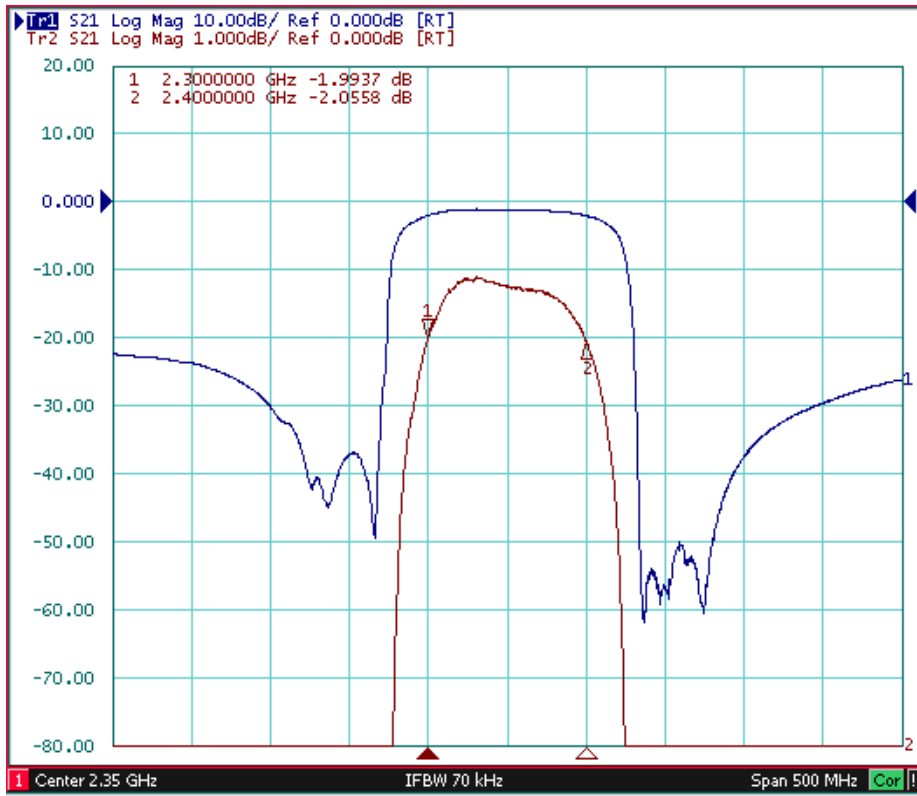

Far side

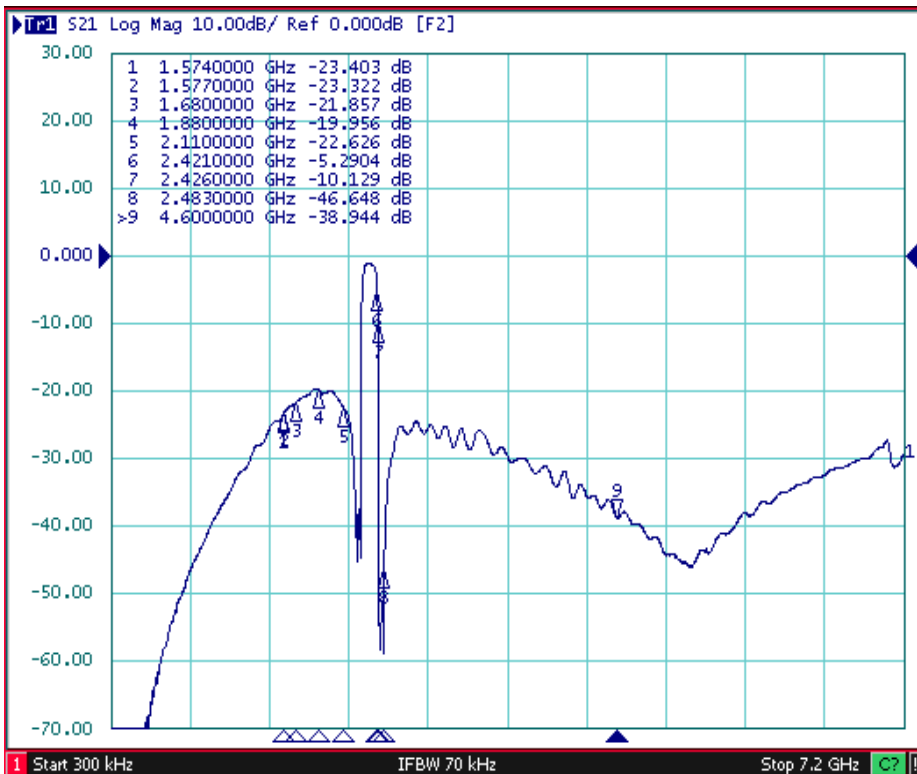

VSWR

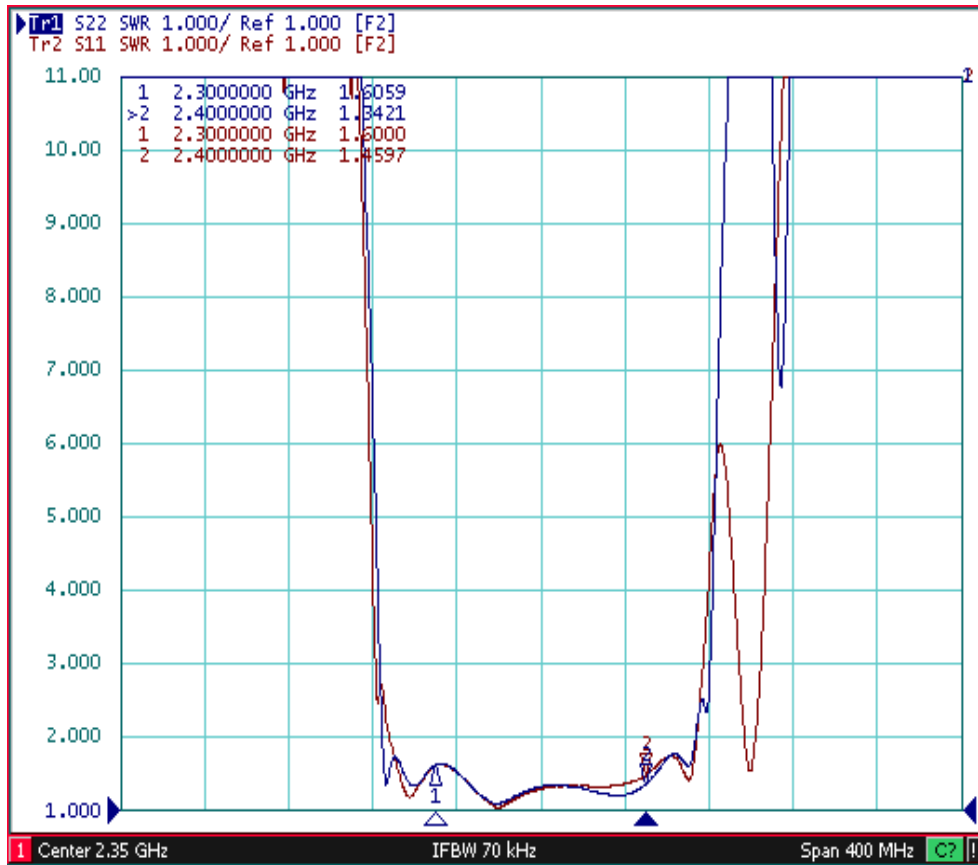

Stability Characteristics

Item No.	Test Item	STD Reference	Test Conditions	per lot
	Preconditioning	JESD22-A113	1) Temperature Cycling, 5 cycles -40°C to 85°C; 2) Bake, 24 hrs @85±5°C; 3)Moisture Soak, Soak time and conditions per IPC/JEDEC J-STD-020 based on device MSL level; 4) Reflow, 3 reflow cycles; 5) Drying, Room ambient temperature.	All behind
1	Temperature Cycling	JESD22-A104	-40°C / +85°C,5°C/min,15min dwell,<1 min transfer time,500cycles	3*25 pcs
2	High Temperature Storage	JESD22-A103	Temperature=85°C, 1000 hours.	3*25 pcs
3	Temperature Humidity no bias	JEDEC Std A101-B	85°C 85%RH 240 hours	3*25 pcs
4	Human Body Mode ESD	JESD22-A114	Ta=25°C, ≥100V	3 pcs
5	Charge Device Mode ESD	JESD22-C101	Ta=25°C, ≥100V	3 pcs
6	Solderability	JESD22-B102	Wetting: 245°C, 5s.	22 pcs
7	Drop Test	JESD22-B111	1500 Gs, 0.5 millisecond duration, half-sine pulse.	20 pcs
8	Mechanical Shock	JESD-47	Shock pulse of 1500g with pulse duration of 0.5+/-0.1msec (X ,Y & Z); 5 shocks per axis.	3*25 pcs


Requirements: The SAW filter shall remain within the electrical specifications after tests.

Remarks


- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

Packing Information

Carrier Tape

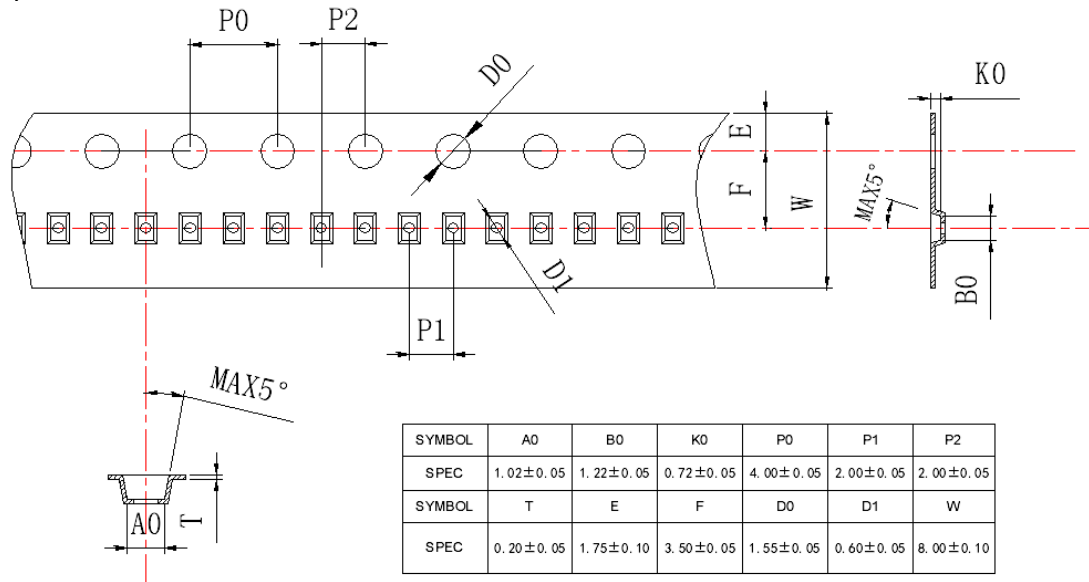

Reel Dimensions

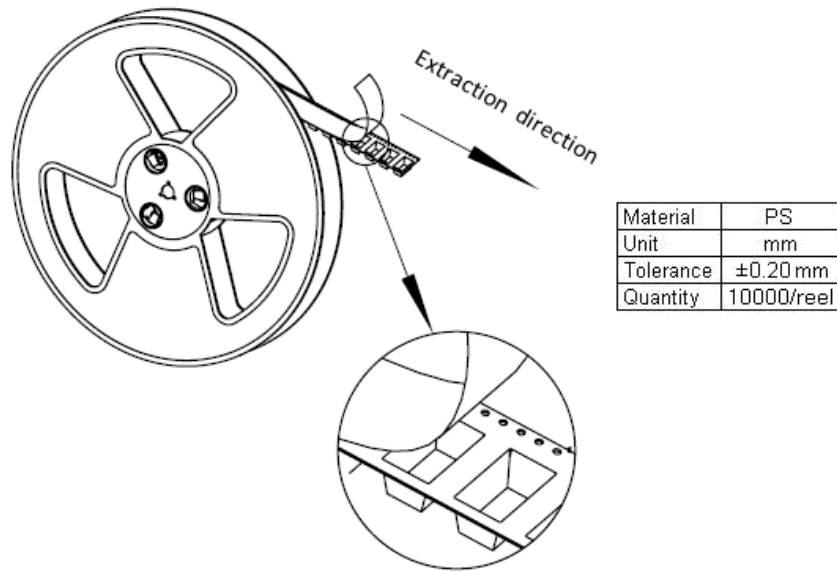


Outer Packing

Type	Quantity	Dimension	Description	Weight
Carton Box I	100000	240×210×285	anti-static plastic bag & carton box 1 reel / bag	2.15
Carton Box II	300000	470×310×285	10bags / box (100000 pcs) 30 bags / box (300000pcs)	6.22

Unit: mm

Unit: kg

Recommended Soldering Profile

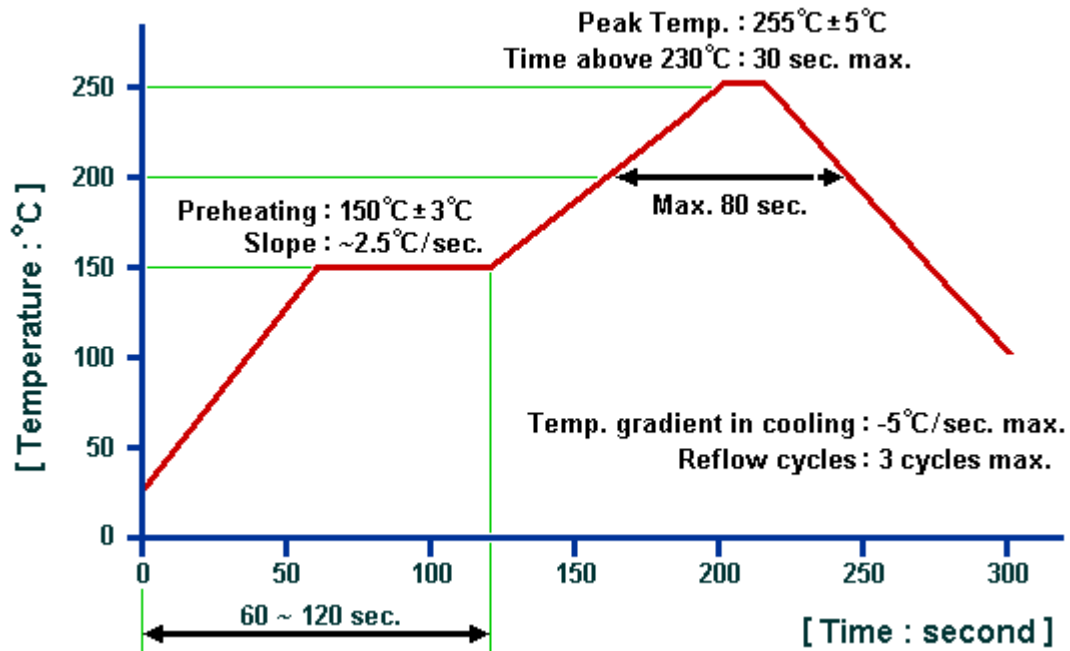

© DQHUAYING 2019. All Rights Reserved.

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
4. For questions on technology, prices and delivery, please contact our sales offices or e-mail sales@dquaying.com.