


CUSTOMER : 日鑫股份有限公司




CUSTOMER P/N: RGA222M1ECC-1320G

PRODUCT DIMENSIONS

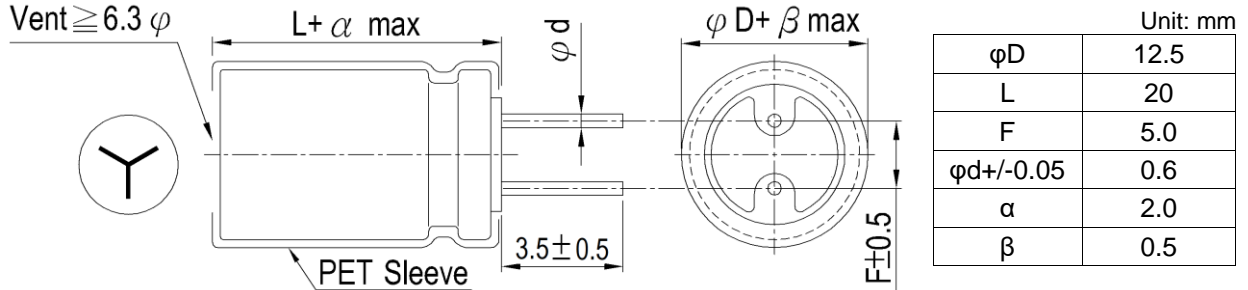

Items	Performance															
Rated Voltage V_R	25 V															
Capacitance C_R	2200 μ F (120 Hz, 20 $^{\circ}$ C)															
Category Temperature Range	-40 $^{\circ}$ C ~ +105 $^{\circ}$ C															
Capacitance Tolerance	-20 % ~ +20 % (120 Hz, 20 $^{\circ}$ C)															
Surge Voltage V_S	28.8 V _{DC}															
Leakage Current (20 $^{\circ}$ C)	$I_{LEAK} \leq 550 \mu$ A After 2 minutes															
Tan δ	≤ 0.16 (120 Hz, 20 $^{\circ}$ C)															
Ripple Current ($I_{AC, R}$ / rms)	1000 mA (120 Hz, 105 $^{\circ}$ C)															
Low Temperature Characteristics at 120 Hz	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td rowspan="2">Impedance ratio</td> <td>$Z_{(-25^{\circ}C)} / Z_{(+20^{\circ}C)}$</td> <td>2</td> </tr> <tr> <td>$Z_{(-40^{\circ}C)} / Z_{(+20^{\circ}C)}$</td> <td>4</td> </tr> </table>	Impedance ratio	$Z_{(-25^{\circ}C)} / Z_{(+20^{\circ}C)}$	2	$Z_{(-40^{\circ}C)} / Z_{(+20^{\circ}C)}$	4										
Impedance ratio	$Z_{(-25^{\circ}C)} / Z_{(+20^{\circ}C)}$		2													
	$Z_{(-40^{\circ}C)} / Z_{(+20^{\circ}C)}$	4														
Ripple Current (A) and Frequency Multipliers	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Frequency (Hz)</td> <td>60(50)</td> <td>120</td> <td>500</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Multipliers</td> <td>0.80</td> <td>1.00</td> <td>1.10</td> <td>1.12</td> <td>1.15</td> </tr> </table>	Frequency (Hz)	60(50)	120	500	1k	10k up	Multipliers	0.80	1.00	1.10	1.12	1.15			
Frequency (Hz)	60(50)	120	500	1k	10k up											
Multipliers	0.80	1.00	1.10	1.12	1.15											
Endurance and Shelf Life Test	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Items</td> <td>Endurance</td> <td>Shelf Life Test</td> </tr> <tr> <td>Test Time</td> <td>2,000 Hrs at 105$^{\circ}$C, V_R, $I_{AC, R}$</td> <td>1,000 Hrs at 105$^{\circ}$C</td> </tr> <tr> <td>Cap. Change</td> <td>Within \pm20 % of initial value</td> <td>Within \pm20 % of initial value</td> </tr> <tr> <td>Tan δ</td> <td>Less than 200% of specified value</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> <td>Within specified value</td> </tr> </table>	Items	Endurance	Shelf Life Test	Test Time	2,000 Hrs at 105 $^{\circ}$ C, V_R , $I_{AC, R}$	1,000 Hrs at 105 $^{\circ}$ C	Cap. Change	Within \pm 20 % of initial value	Within \pm 20 % of initial value	Tan δ	Less than 200% of specified value	Less than 200% of specified value	Leakage Current	Within specified value	Within specified value
Items	Endurance	Shelf Life Test														
Test Time	2,000 Hrs at 105 $^{\circ}$ C, V_R , $I_{AC, R}$	1,000 Hrs at 105 $^{\circ}$ C														
Cap. Change	Within \pm 20 % of initial value	Within \pm 20 % of initial value														
Tan δ	Less than 200% of specified value	Less than 200% of specified value														
Leakage Current	Within specified value	Within specified value														
Solder heat-resistance	During dip or wave soldering, temperature at the capacitors terminals should be less than 260 \pm 5 $^{\circ}$ C, 10 \pm 1 seconds.															
Standards	JIS C 5101-4, IEC 60384-4															
Remarks	RoHS Compliance, Halogen-free															

* Please refer to "Precautions and Guidelines for Aluminum Electrolytic Capacitors" section in Lelon's catalog for further details.

Publication Date	September 8, 2022	Approval Signatures:	Approved	Checked	Designed
Revision Date					
Version No.	1		Please return one copy with your approval		