CAD FILE:

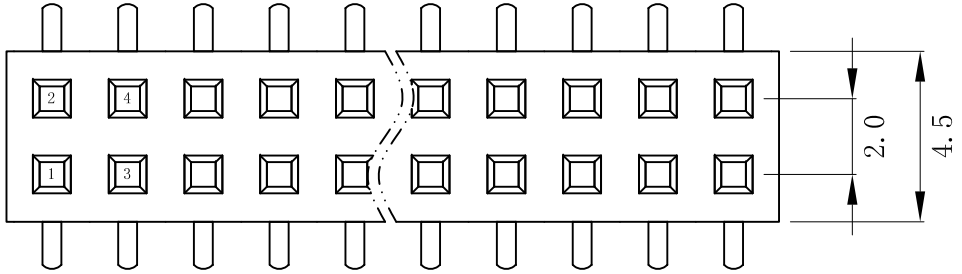

Technical Data
Material:
Contact material:Phosphor bronze
Plating:Gold Flash
Insulator material:Black polyester UL94V-0
Standard:PA6T+30%G.F

Electrical:
Current rating:1.5Amps/contact max.
Contact resistance:≤20mΩ/contact
Insulation resistance:≥1000MΩ at V=100V
Withstanding voltage:450V AC/minute

Mechanical:
Soldering temperature:+260℃,4s max

UNSPECIFIED TOLERANCE:±0.20

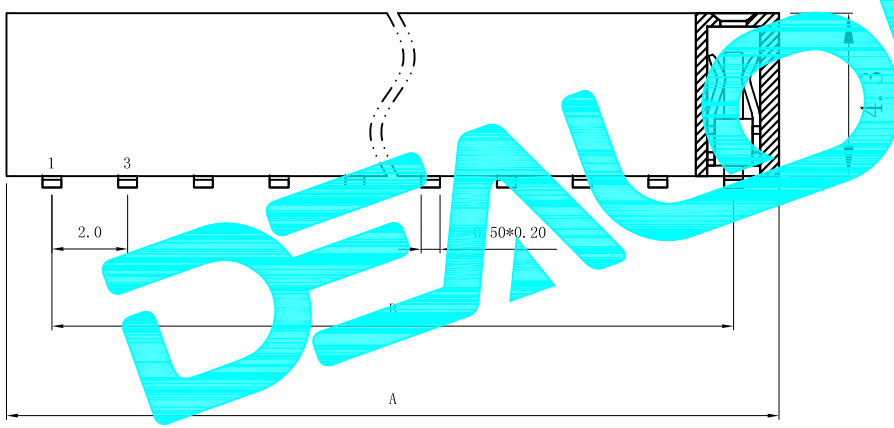

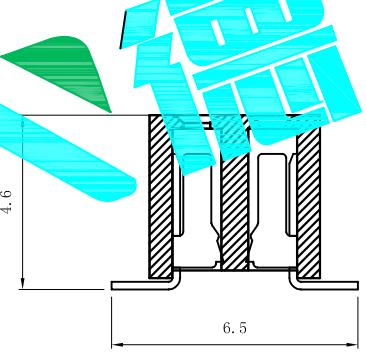

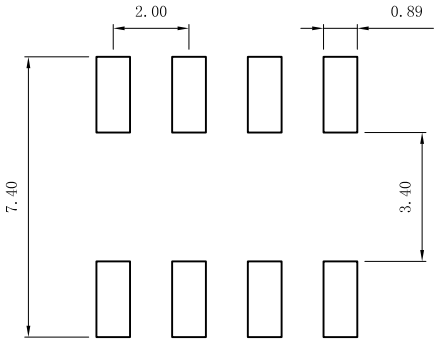

PCB Layout

$$A=2.0*\frac{nP}{2}+0.40\pm0.3$$

$$B=2.0*\frac{nP}{2}-2.0\pm0.2$$

Pin Number=2～80

———	A	———	NEW	———	———	———
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

APPROVALS		DATE	DEALON德之隆® ELECTRONICS CO.,LTD		
DRAWN	G.M.Chen	2015/7/17			
CHECKED			TITLE:	CONNECTOR	
APPROVALS			PART NO.	DW200S-22-XX-43	
TOLERANCES ARE	30~以上 ±0.30 / 10~30 ±0.20 / 5~10 ±0.15 / ~5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1	SHEET 1 OF 1
			DRAWING NO.	———	PROJ:

DEALON德之隆®