


600 W TVS in SMB



Features

- Peak pulse power: 600 W (10/1000 μ s) and 4 kW (8/20 μ s)
- Stand-off voltage range from 5 V to 188 V
- Unidirectional and bidirectional types
- Low leakage current: 0.2 μ A at 25 °C and 1 μ A at 85 °C
- Operating T_j max: 150 °C
- High power capability at T_j max.: up to 515 W (10/1000 μ s)
- Lead finishing: matte tin plating

Complies with the following standards

- UL94, V0
- J-STD-020 MSL level 1
- J-STD-002, JESD 22-B102 E3 and MIL-STD-750, method 2026 solderable matte tin plated leads
- JESD-201 class 2 whisker test
- IPC7531 footprint
- JEDEC registered package outline
- IEC 61000-4-4 level 4:
 - 4 kV
- IEC 61000-4-2, C = 150 pF - R = 330 Ω exceeds level 4:
 - 30 kV (air discharge)
 - 30 kV (contact discharge)

Description

The SMBJ series are designed to protect sensitive equipment against electrostatic discharges according to IEC 61000-4-2 and MIL STD 883, method 3015, and electrical overstress according to IEC 61000-4-4 and 5. This device is more generally used against surges below 600 W (10/1000 μ s).

The Planar technology makes it suitable for high-end equipment and SMPS where low leakage current and high junction temperature are required to provide reliability and stability over time.

The SMBJ series are packaged in SMB.

Product status link

SMBJ

[SMBJ5.0A](#), [SMBJ5.0CA](#),
[SMBJ6.0A](#), [SMBJ6.0CA](#),
[SMBJ6.5A](#), [SMBJ6.5CA](#),
[SMBJ8.5A](#), [SMBJ8.5CA](#),
[SMBJ10A](#), [SMBJ10CA](#),
[SMBJ12A](#), [SMBJ12CA](#),
[SMBJ13A](#), [SMBJ13CA](#),
[SMBJ15A](#), [SMBJ15CA](#),
[SMBJ16A](#), [SMBJ16CA](#),
[SMBJ18A](#), [SMBJ18CA](#),
[SMBJ20A](#), [SMBJ20CA](#),
[SMBJ22A](#), [SMBJ22CA](#),
[SMBJ24A](#), [SMBJ24CA](#),
[SMBJ26A](#), [SMBJ26CA](#),
[SMBJ28A](#), [SMBJ28CA](#),
[SMBJ30A](#), [SMBJ30CA](#),
[SMBJ33A](#), [SMBJ33CA](#),
[SMBJ36A](#), [SMBJ36CA](#),
[SMBJ40A](#), [SMBJ40CA](#),
[SMBJ43A](#), [SMBJ43CA](#),
[SMBJ48A](#), [SMBJ48CA](#),
[SMBJ58A](#), [SMBJ58CA](#),
[SMBJ64A](#), [SMBJ64CA](#),
[SMBJ70A](#), [SMBJ70CA](#),
[SMBJ85A](#), [SMBJ85CA](#),
[SMBJ100A](#), [SMBJ100CA](#),
[SMBJ130A](#), [SMBJ130CA](#),
[SMBJ154A](#), [SMBJ154CA](#),
[SMBJ170A](#), [SMBJ170CA](#),
[SMBJ188A](#), [SMBJ188CA](#)

1 Characteristics

Table 1. Absolute maximum ratings ($T_{amb} = 25\text{ }^{\circ}\text{C}$)

| Symbol | Parameter | Value | Unit | |
|-----------|--|---|-------------|--------------------|
| V_{PP} | Peak pulse voltage | IEC 61000-4-2 (C = 150 pF, R = 330 Ω) | | |
| | | Contact discharge | 30 | kV |
| | | Air discharge | 30 | |
| P_{PP} | Peak pulse power dissipation | 10/1000 μs , T_j initial = T_{amb} | 600 | W |
| T_{stg} | Storage temperature range | | -65 to +150 | $^{\circ}\text{C}$ |
| T_j | Operating junction temperature range | | -55 to +150 | $^{\circ}\text{C}$ |
| T_L | Maximum lead temperature for soldering during 10 s | | 260 | $^{\circ}\text{C}$ |

Figure 1. Electrical characteristics - parameter definitions



Figure 2. Pulse definition for electrical characteristics

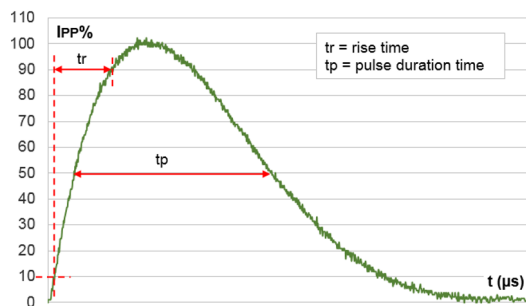


Table 2. Electrical characteristics - parameter values ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

| Type | I_{RM} max at V_{RM} | | | V_{BR} at $I_{BR}^{(1)}$ | | | 10 / 1000 μs | | | 8 / 20 μs | | | αT |
|-------------|--------------------------|-----------------------|-----|----------------------------|------|----|-------------------------|----------------|----------|----------------------|----------------|----------|----------------------------|
| | | | | | | | $V_{CL}^{(2)(3)}$ | $I_{PP}^{(4)}$ | R_D | $V_{CL}^{(2)(3)}$ | $I_{PP}^{(4)}$ | R_D | |
| | 25 $^{\circ}\text{C}$ | 85 $^{\circ}\text{C}$ | | Min. | Typ. | | Max. | | Max. | Max. | | Max. | |
| | μA | | V | V | | mA | V | A | Ω | V | A | Ω | $10^{-4}/^{\circ}\text{C}$ |
| SMBJ5.0A/CA | 20 | 50 | 5.0 | 6.40 | 6.74 | 10 | 9.2 | 68 | 0.031 | 14.4 | 275 | 0.027 | 5.7 |
| SMBJ6.0A/CA | 20 | 50 | 6.0 | 6.70 | 7.05 | 10 | 10.3 | 61 | 0.048 | 14.8 | 270 | 0.027 | 5.9 |
| SMBJ6.5A/CA | 20 | 50 | 6.5 | 7.20 | 7.58 | 10 | 11.2 | 56 | 0.058 | 15.2 | 266 | 0.027 | 6.1 |
| SMBJ8.5A/CA | 20 | 50 | 8.5 | 9.40 | 9.90 | 1 | 14.4 | 41.7 | 0.096 | 19.5 | 205 | 0.044 | 7.3 |
| SMBJ10A/CA | 0.2 | 1 | 10 | 11.1 | 11.7 | 1 | 17 | 37 | 0.127 | 21.7 | 184 | 0.051 | 7.8 |
| SMBJ12A/CA | 0.2 | 1 | 12 | 13.3 | 14.0 | 1 | 19.9 | 31 | 0.168 | 25.3 | 157 | 0.068 | 8.3 |
| SMBJ13A/CA | 0.2 | 1 | 13 | 14.4 | 15.2 | 1 | 21.5 | 29 | 0.191 | 27.2 | 147 | 0.076 | 8.4 |
| SMBJ15A/CA | 0.2 | 1 | 15 | 16.7 | 17.6 | 1 | 24.4 | 25.1 | 0.236 | 32.5 | 123 | 0.114 | 8.8 |
| SMBJ16A/CA | 0.2 | 1 | 16 | 17.8 | 18.7 | 1 | 26 | 23.1 | 0.276 | 34.4 | 116 | 0.127 | 8.8 |
| SMBJ18A/CA | 0.2 | 1 | 18 | 20.0 | 21.1 | 1 | 29.2 | 21.5 | 0.328 | 39.3 | 102 | 0.168 | 9.2 |
| SMBJ20A/CA | 0.2 | 1 | 20 | 22.2 | 23.4 | 1 | 32.4 | 19.4 | 0.404 | 42.8 | 93 | 0.196 | 9.4 |
| SMBJ22A/CA | 0.2 | 1 | 22 | 24.4 | 25.7 | 1 | 35.5 | 17.7 | 0.481 | 48.3 | 83 | 0.257 | 9.6 |
| SMBJ24A/CA | 0.2 | 1 | 24 | 26.7 | 28.1 | 1 | 38.9 | 16 | 0.587 | 50 | 80 | 0.256 | 9.6 |
| SMBJ26A/CA | 0.2 | 1 | 26 | 28.9 | 30.4 | 1 | 42.1 | 14.9 | 0.683 | 53.5 | 75 | 0.288 | 9.7 |
| SMBJ28A/CA | 0.2 | 1 | 28 | 31.1 | 32.7 | 1 | 45.4 | 13.8 | 0.802 | 59 | 68 | 0.363 | 9.8 |
| SMBJ30A/CA | 0.2 | 1 | 30 | 33.3 | 35.1 | 1 | 48.4 | 13 | 0.888 | 64.3 | 62 | 0.443 | 9.9 |
| SMBJ33A/CA | 0.2 | 1 | 33 | 36.7 | 38.6 | 1 | 53.3 | 11.8 | 1.08 | 69.7 | 57 | 0.512 | 10.0 |
| SMBJ36A/CA | 0.2 | 1 | 36 | 40.0 | 42.1 | 1 | 58.1 | 10.3 | 1.35 | 76 | 52 | 0.611 | 10.0 |
| SMBJ40A/CA | 0.2 | 1 | 40 | 44.4 | 46.7 | 1 | 64.5 | 9.7 | 1.59 | 84 | 48 | 0.728 | 10.1 |
| SMBJ48A/CA | 0.2 | 1 | 48 | 53.3 | 56.1 | 1 | 77.4 | 8.1 | 2.28 | 100 | 40 | 1.03 | 10.3 |
| SMBJ58A/CA | 0.2 | 1 | 58 | 64.4 | 67.8 | 1 | 93.6 | 6.7 | 3.34 | 121 | 33 | 1.51 | 10.4 |
| SMBJ64A/CA | 0.2 | 1 | 64 | 71.3 | 75 | 1 | 103 | 5.8 | 4.17 | 134 | 30 | 1.84 | 10.5 |
| SMBJ70A/CA | 0.2 | 1 | 70 | 77.8 | 81.9 | 1 | 113 | 5.5 | 4.91 | 146 | 27 | 2.22 | 10.5 |
| SMBJ85A/CA | 0.2 | 1 | 85 | 94 | 99 | 1 | 137 | 4.6 | 7.18 | 178 | 22.5 | 3.29 | 10.6 |
| SMBJ100A/CA | 0.2 | 1 | 100 | 111 | 117 | 1 | 162 | 3.8 | 10.3 | 212 | 19 | 4.69 | 10.7 |
| SMBJ130A/CA | 0.2 | 1 | 130 | 144 | 152 | 1 | 209 | 3 | 16.5 | 265 | 15 | 7.03 | 10.8 |
| SMBJ154A/CA | 0.2 | 1 | 154 | 171 | 180 | 1 | 246 | 2.4 | 23.8 | 317 | 12.6 | 10.2 | 10.8 |
| SMBJ170A/CA | 0.2 | 1 | 170 | 189 | 199 | 1 | 275 | 2.2 | 30.0 | 353 | 11.3 | 12.7 | 10.8 |
| SMBJ188A/CA | 0.2 | 1 | 188 | 209 | 220 | 1 | 328 | 2 | 48.5 | 388 | 10.3 | 15.2 | 10.8 |

1. To calculate V_{BR} versus T_j : V_{BR} at $T_j = V_{BR}$ at $25\text{ }^{\circ}\text{C} \times (1 + \alpha T \times (T_j - 25))$
2. To calculate V_{CL} versus T_j : V_{CL} at $T_j = V_{CL}$ at $25\text{ }^{\circ}\text{C} \times (1 + \alpha T \times (T_j - 25))$
3. To calculate V_{CL} max versus $I_{PP\text{appli}}$: $V_{CL\text{max}} = V_{CL} - R_D \times (I_{PP} - I_{PP\text{appli}})$ where $I_{PP\text{appli}}$ is the surge current in the application
4. Surge capability given for both directions for unidirectional and bidirectional devices

1.1 Characteristics (curves)

Figure 3. Maximum peak power dissipation versus initial junction temperature

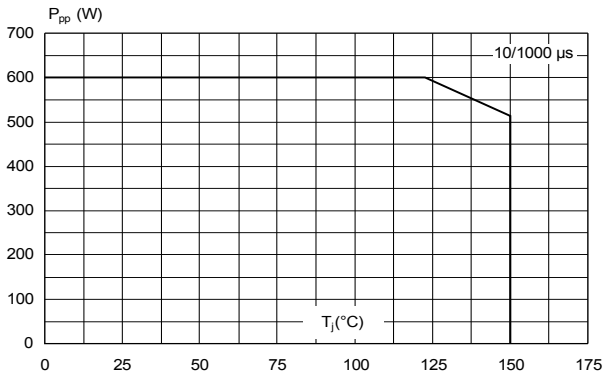


Figure 4. Maximum peak pulse power versus exponential pulse duration

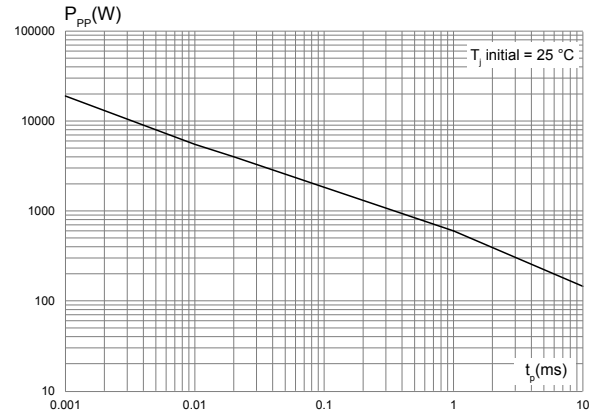


Figure 5. Maximum peak pulse current versus clamping voltage

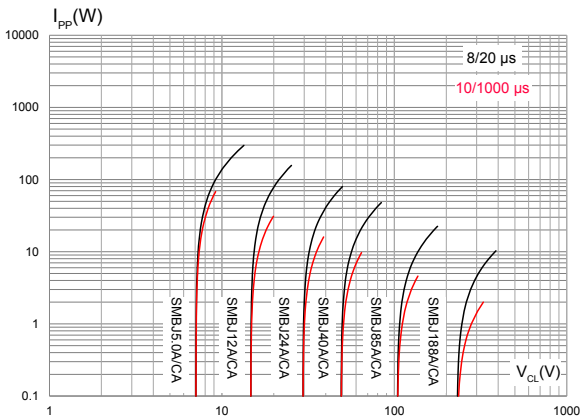


Figure 6. Dynamic resistance versus pulse duration

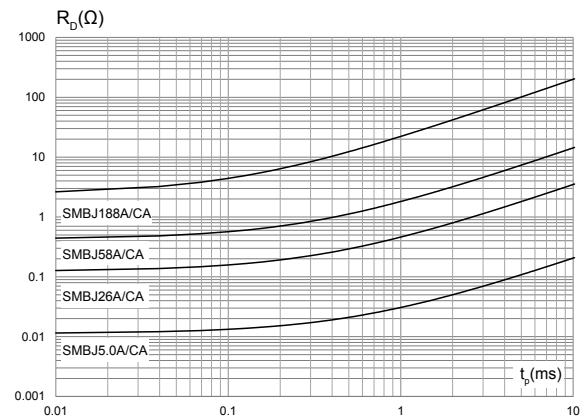


Figure 7. Junction capacitance versus reverse applied voltage (unidirectional types)

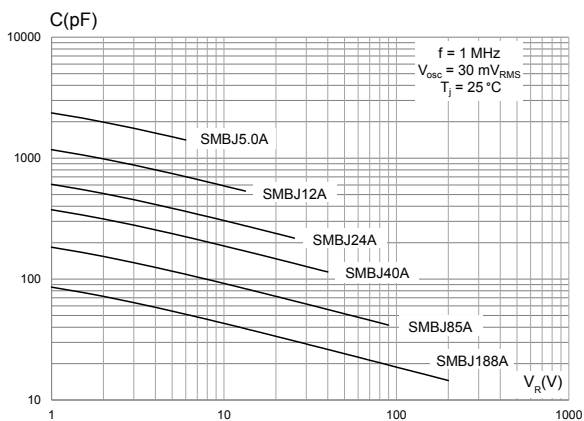


Figure 8. Junction capacitance versus applied voltage (bidirectional types)

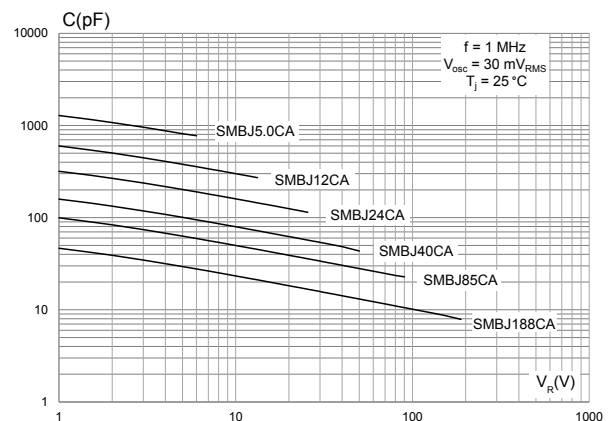


Figure 9. Leakage current versus junction temperature

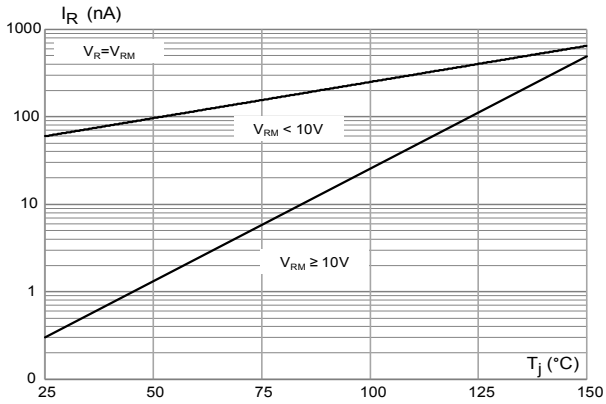


Figure 10. Peak forward voltage drop versus peak forward current

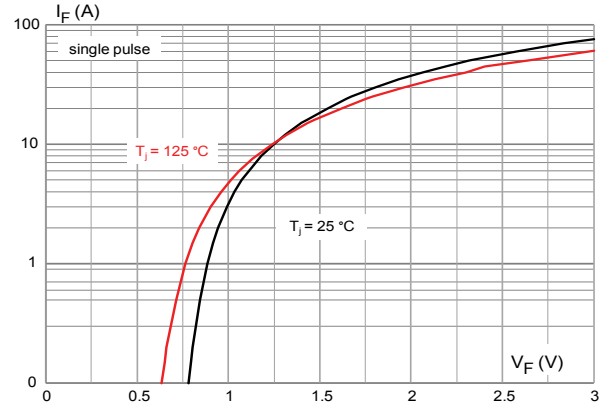


Figure 11. Thermal impedance junction to ambient versus pulse duration


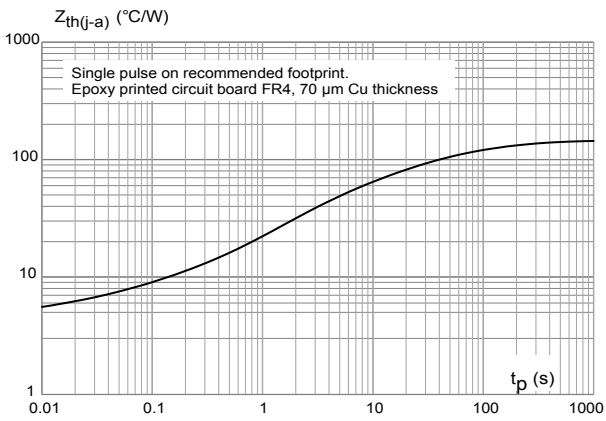


Figure 12. Thermal resistance junction to ambient versus copper area under each lead

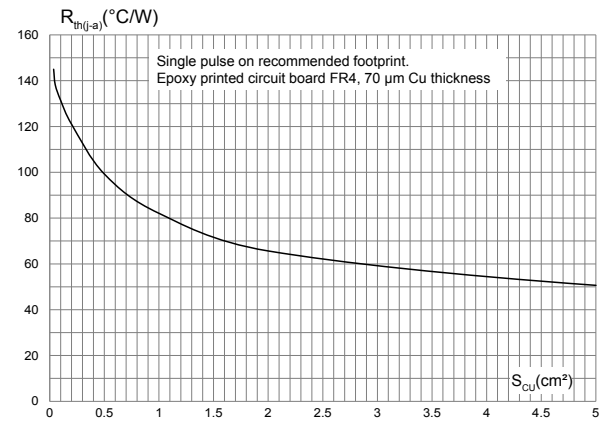

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 SMB package information

Figure 13. SMB package outline

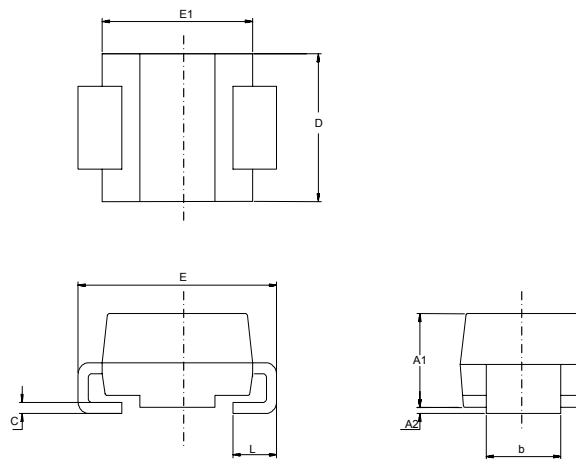


Table 3. SMB package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|------|-----------------------|--------|
| | Millimeters | | Inches ⁽¹⁾ | |
| | Min. | Max. | Min. | Max. |
| A1 | 1.90 | 2.45 | 0.0748 | 0.0965 |
| A2 | 0.05 | 0.20 | 0.0020 | 0.0079 |
| b | 1.95 | 2.20 | 0.0768 | 0.0867 |
| c | 0.15 | 0.40 | 0.0059 | 0.0157 |
| D | 3.30 | 3.95 | 0.1299 | 0.1556 |
| E | 5.10 | 5.60 | 0.2008 | 0.2205 |
| E1 | 4.05 | 4.60 | 0.1594 | 0.1811 |
| L | 0.75 | 1.50 | 0.0295 | 0.0591 |

1. Values in inches are converted from mm

Figure 14. SMB recommended footprint

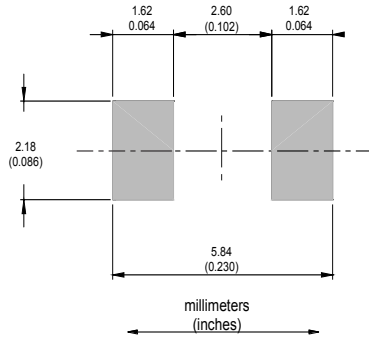


Figure 15. Marking layout


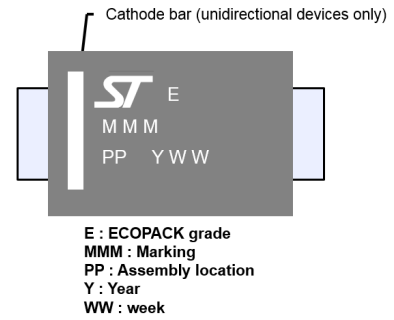


Figure 16. Package orientation in reel

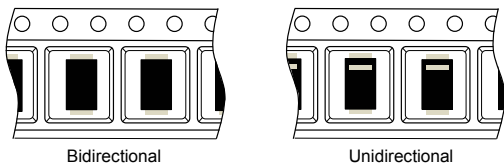

Taped according to EIA-481
 Pocket dimensions are not on scale.
 Pocket shape may vary depending on package
 On bidirectional devices, marking and logo may not be always in the same direction.

Figure 17. Tape and reel orientation

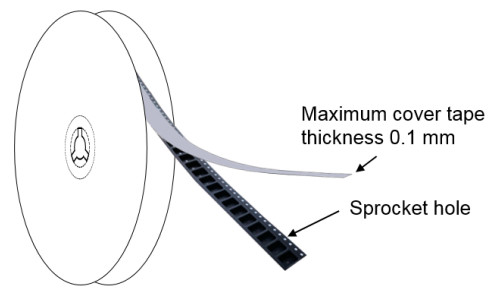


Figure 18. Reel dimensions (mm)

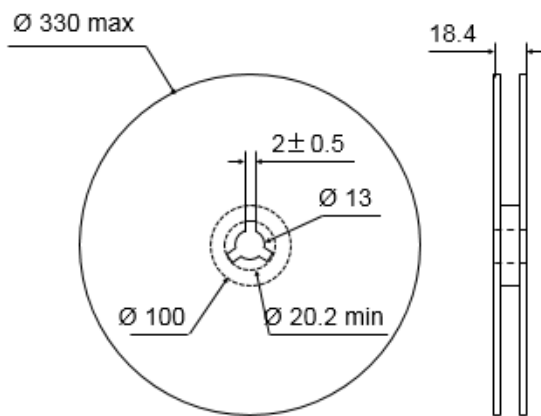


Figure 19. Inner box dimensions (mm)


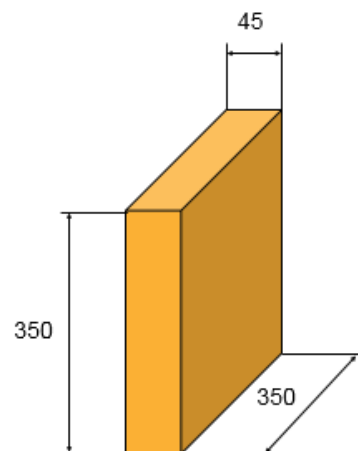


Figure 20. Tape and reel outline

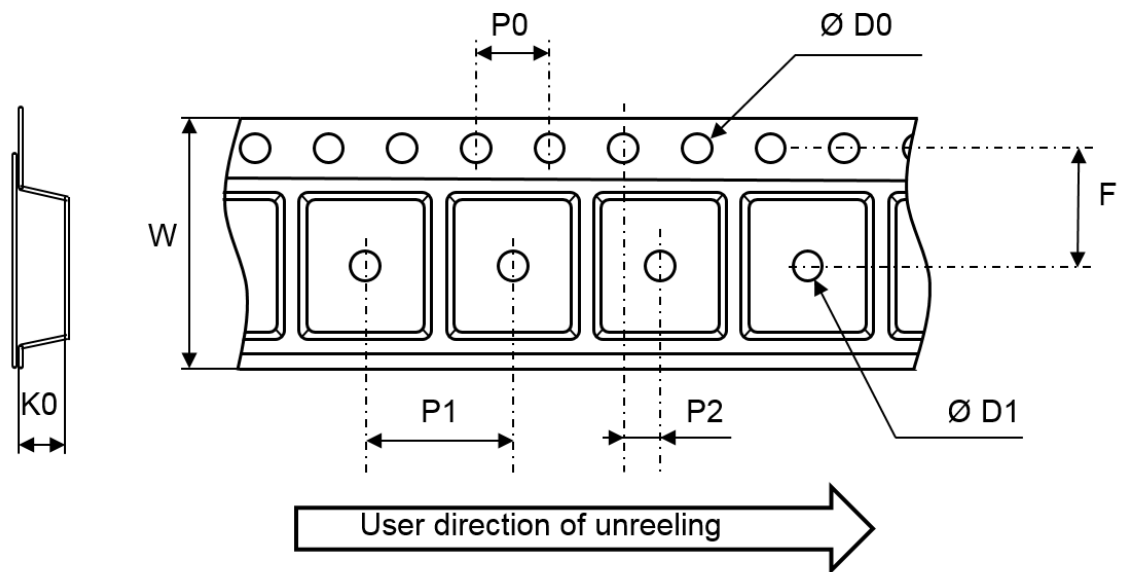


Note: Pocket dimensions are not on scale
Pocket shape may vary depending on package

Table 4. Tape and reel mechanical data

| Ref. | Dimensions | | |
|------|-------------|------|------|
| | Millimeters | | |
| | Min. | Typ. | Max. |
| ØD0 | 1.5 | 1.55 | 1.6 |
| ØD1 | 1.5 | | |
| F | 5.4 | 5.5 | 5.6 |
| K0 | 2.64 | 2.74 | 2.84 |
| P0 | 3.9 | 4.0 | 4.1 |
| P1 | 7.9 | 8.0 | 8.1 |
| P2 | 1.9 | 2.0 | 2.1 |
| W | 11.7 | 12.0 | 12.3 |

2.2 Reflow profile

Figure 21. ST ECOPACK recommended soldering reflow profile for PCB mounting

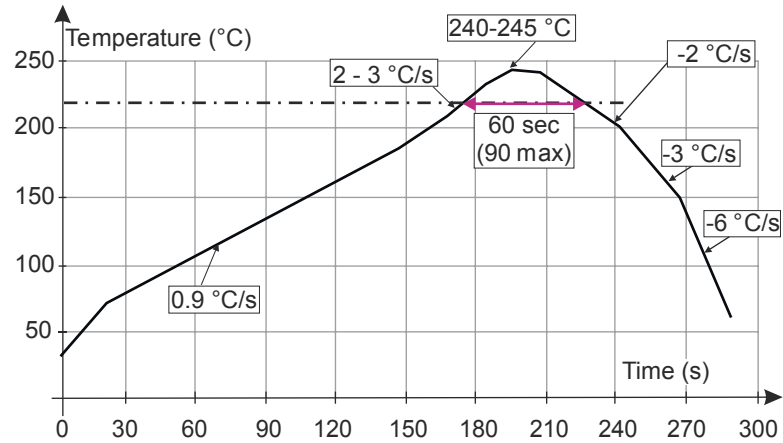

Note: Minimize air convection currents in the reflow oven to avoid component movement. Maximum soldering profile corresponds to the latest IPC/JEDEC J-STD-020.

3 Ordering information

Figure 22. Ordering information scheme

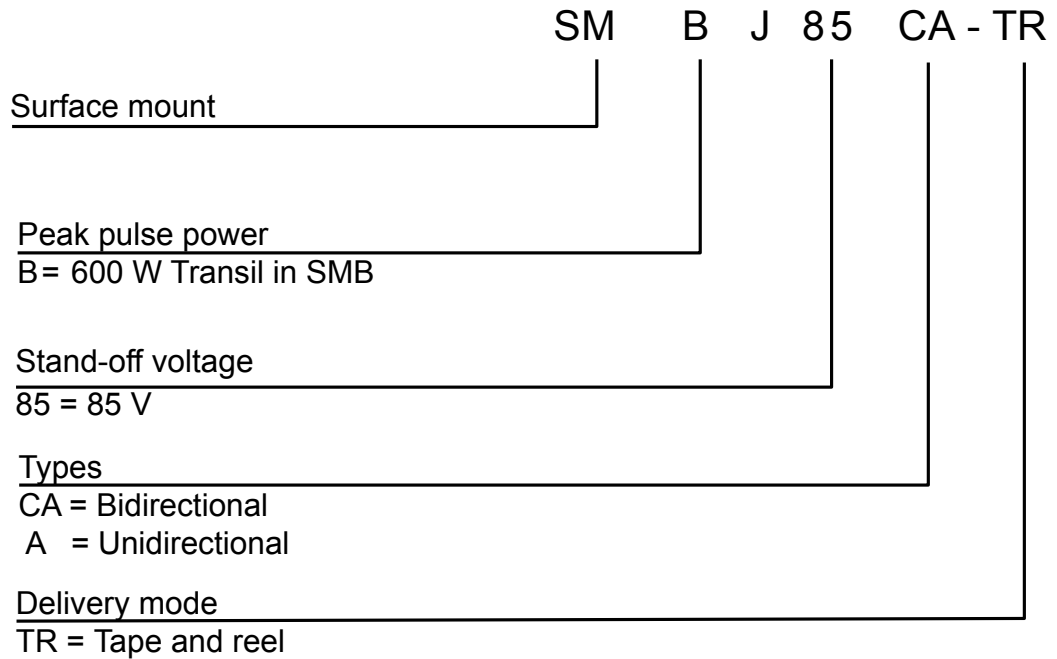


Table 5. Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|---------------|-----------------------|---------|--------|-----------|---------------|
| SMBJxxxA / CA | See Table 6. Marking. | SMB | 0.11 g | 2500 | Tape and reel |

Table 6. Marking

| Order code | Marking | Order code | Marking |
|------------|---------|------------|---------|
| SMBJ5.0A | BUZ | SMBJ5.0CA | BBZ |
| SMBJ6.0A | BUA | SMBJ6.0CA | BBA |
| SMBJ6.5A | BUB | SMBJ6.5CA | BBB |
| SMBJ8.5A | BUC | SMBJ8.5CA | BBC |
| SMBJ10A | BUD | SMBJ10CA | BBD |
| SMBJ12A | BUE | SMBJ12CA | BBE |
| SMBJ13A | BUF | SMBJ13CA | BBF |
| SMBJ15A | BUG | SMBJ15CA | BBG |
| SMBJ16A | CUG | SMBJ16CA | CBG |
| SMBJ18A | BUH | SMBJ18CA | BBH |
| SMBJ20A | BUI | SMBJ20CA | BBI |
| SMBJ22A | BVA | SMBJ22CA | CBH |
| SMBJ24A | BUJ | SMBJ24CA | BBJ |
| SMBJ26A | BUK | SMBJ26CA | BBK |
| SMBJ28A | BUL | SMBJ28CA | BBL |
| SMBJ30A | BUM | SMBJ30CA | BBM |
| SMBJ33A | BUN | SMBJ33CA | BBN |
| SMBJ36A | CUN | SMBJ36CA | CBN |
| SMBJ40A | CUJ | SMBJ40CA | CBJ |
| SMBJ48A | BUW | SMBJ48CA | BBW |
| SMBJ58A | BUO | SMBJ58CA | BBO |
| SMBJ64A | BUP | SMBJ64CA | BBP |
| SMBJ70A | CUM | SMBJ70CA | CBM |
| SMBJ85A | BUQ | SMBJ85CA | BBQ |
| SMBJ100A | CUQ | SMBJ100CA | CBQ |
| SMBJ130A | BUS | SMBJ130CA | BBS |
| SMBJ154A | BUT | SMBJ154CA | BBT |
| SMBJ170A | BUU | SMBJ170CA | BBU |
| SMBJ188A | BUV | SMBJ188CA | BBV |

Revision history

Table 7. Document revision history

| Date | Version | Changes |
|-------------|---------|--|
| Oct-2001 | 4 | Previous issue. |
| 10-Feb-2005 | 5 | Reformatted to current template. Added directional (uni and bi) indications to graphics. Added ECOPACK statement. |
| 16-Nov-2006 | 6 | Add part numbers SMBJ36A-TR and SMBJ36CA-TR in Table 3. |
| 14-May-2009 | 7 | Reformatted to current standards. Updated ECOPACK statement. Added part number SMBJ43CA/A. |
| 17-Sep-2009 | 8 | Document updated for low leakage current. |
| 09-Jul-2010 | 9 | Changed timescale in Figure 9. |
| 20-Oct-2010 | 10 | Updated Figure 13. |
| 24-Jan-2018 | 11 | Updated Table 3: "Electrical characteristics parameter values ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)". |
| 26-Apr-2021 | 12 | Updated Table 6. Minor text changes. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved