


# MW601-4T InSb Hall Element

Ultra High-sensitivity InSb Hall element

Classic SOT Package

Shipped in packet-tape reel (3,000pcs per reel)

## Dimensional Drawing (Unit: mm)

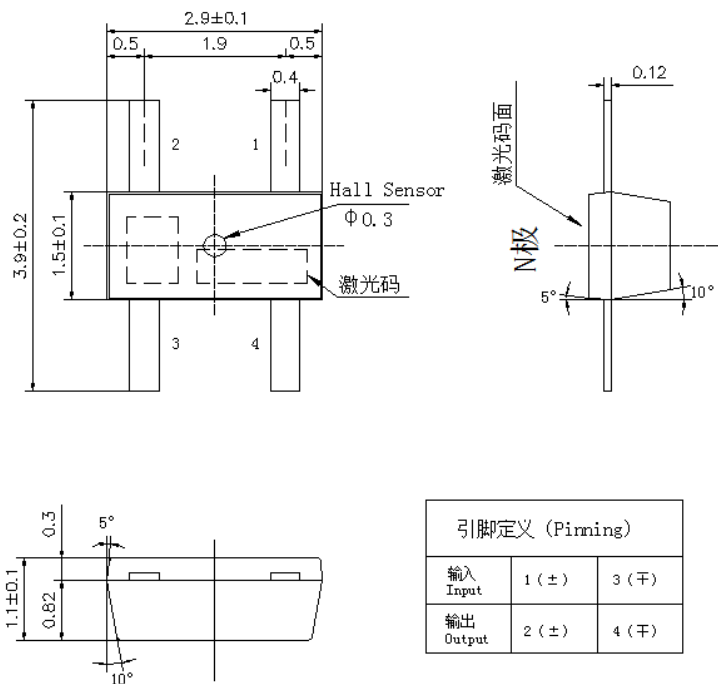

## Absolute Maximum Rating

Operating Temperature Range      -40°C ~ 125°C  
Storage Temperature Range        -55°C ~ 150°C  
Maximum Input Voltage  $I_{cmax}$       20mA

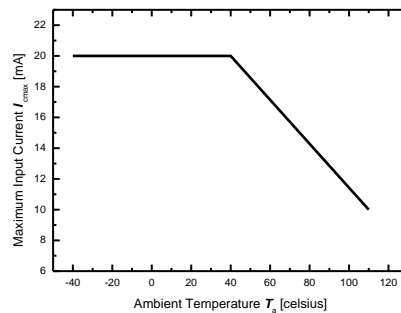


Figure 1. Maximum input current  $I_{cmax}$

Copy Right Reserved

JZWI-DS-021 Version 2.1

Matrixopto.Co.,Ltd is the owner of the trademarks used in this document, which has the exclusive right to prevent any third parties not having the owner's consent from using in the course of trade identical or similar signs for goods or services where such use would result in a likelihood of confusion.

## Electrical Characteristics (RT=25°C)

Table 1. Electrical Characteristics of MW601-4T.

Item	Symbol	Test Condi.	Min.	Typ.	Max.	Unit
Hall Voltage	$V_H$	$B = 50\text{mT}, V_C = 1\text{V}$ $T_a = \text{RT}$	168		516	mV
Input Resistance	$R_{in}$	$B = 0\text{mT}, I_c = 0.1\text{mA}$ $T_a = \text{RT}$	240		550	$\Omega$
Output Resistance	$R_{out}$	$B = 0\text{mT}, I_c = 0.1\text{mA}$ $T_a = \text{RT}$	240		550	$\Omega$
Offset Voltage	$V_{os}$	$B = 0\text{mT}, V_C = 1\text{V}$ $T_a = \text{RT}$	-5		+5	mV
Temp. Coeffi. of $V_H$	$\alpha V_H$	$B = 50\text{mT}, I_c = 5\text{mA}$ , $T_a = 0^\circ\text{C} \sim 40^\circ\text{C}$		-1.8		%/°C
Temp. Coeffi. of $R_{in}$	$\alpha R_{in}$	$B = 0\text{mT}, I_c = 0.1\text{mA}$ , $T_a = 0^\circ\text{C} \sim 40^\circ\text{C}$		-1.8		%/°C
Dielectric strength		100V D.C	1.0			M $\Omega$

Note:

$$1. \quad V_H = V_{H-M} - V_{os}$$

In which  $V_{H-M}$  is the Output Hall Voltage,  $V_H$  is the Hall Voltage and  $V_{os}$  is the offset Voltage

under the identical electrical stimuli.

$$2. \quad \alpha V_H = \frac{1}{V_H(T_1)} \times \frac{V_H(T_3) - V_H(T_2)}{(T_3 - T_2)} \times 100$$

$$3. \quad \alpha R_{in} = \frac{1}{R_{in}(T_1)} \times \frac{R_{in}(T_3) - R_{in}(T_2)}{(T_3 - T_2)} \times 100$$


$$T_1 = 20^\circ\text{C}, \quad T_2 = 0^\circ\text{C}, \quad T_3 = 40^\circ\text{C}$$

## Classification of Output Hall Voltage ( $V_H$ )

**Table 2.** Classification of Hall Voltage

Rank	$V_H$ [mV]	Conditions
C	168 ~ 204	B=50mT, $V_C=1V$
D	196 ~ 236	
E	228 ~ 274	
F	266 ~ 320	
G	310 ~ 370	
H	360 ~ 415	
I	405 ~ 465	
J	454 ~ 516	

## Characteristic Curves

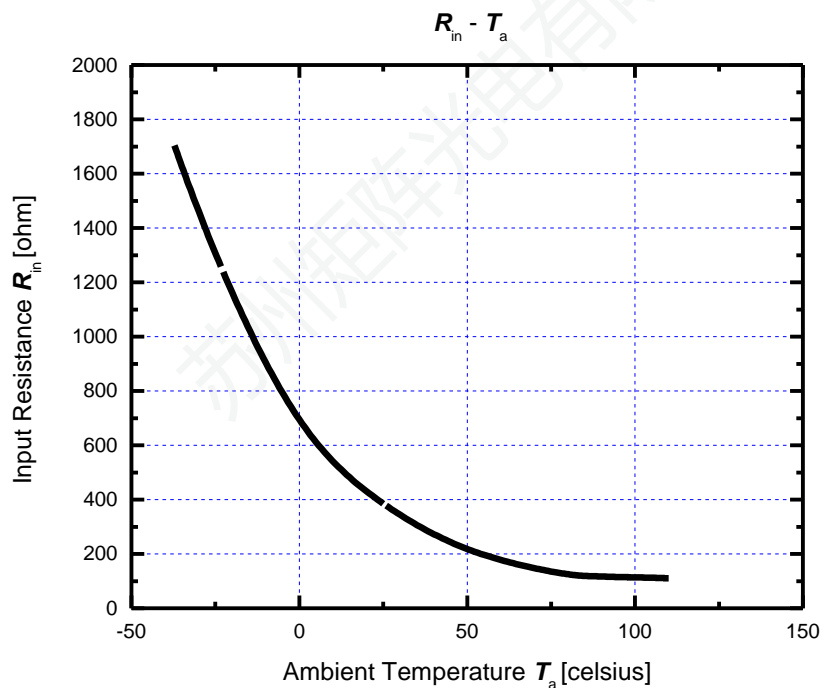

**Figure 2.** Input resistance  $R_{in}$  as a function of ambient temperature  $T_a$ .

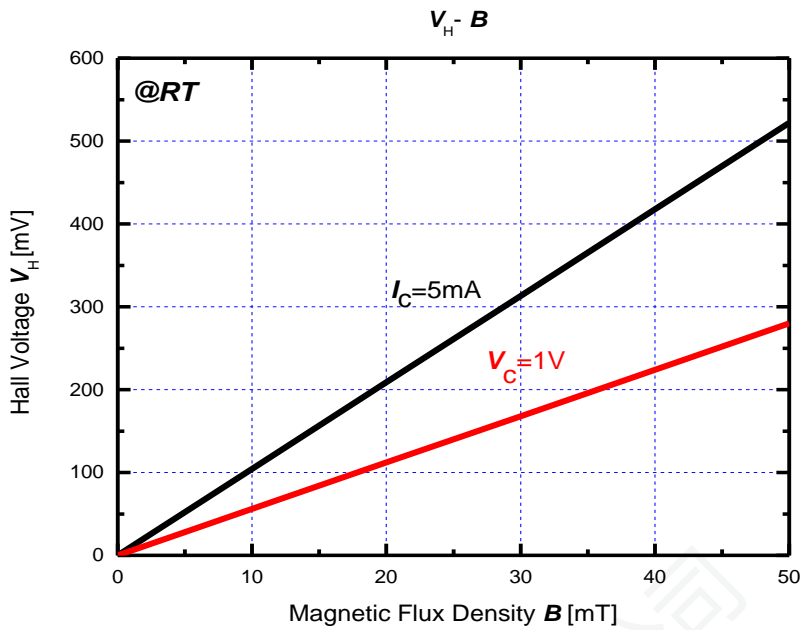


Figure 3. Hall voltage  $V_H$  as a function of magnetic flux density  $B$ .

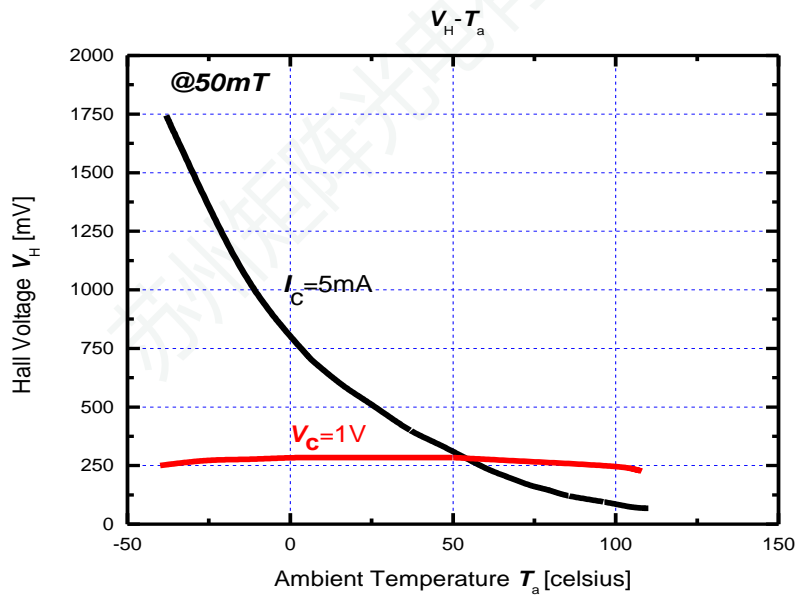


Figure 4. Hall voltage  $V_H$  as a function of ambient temperature  $T_a$ .

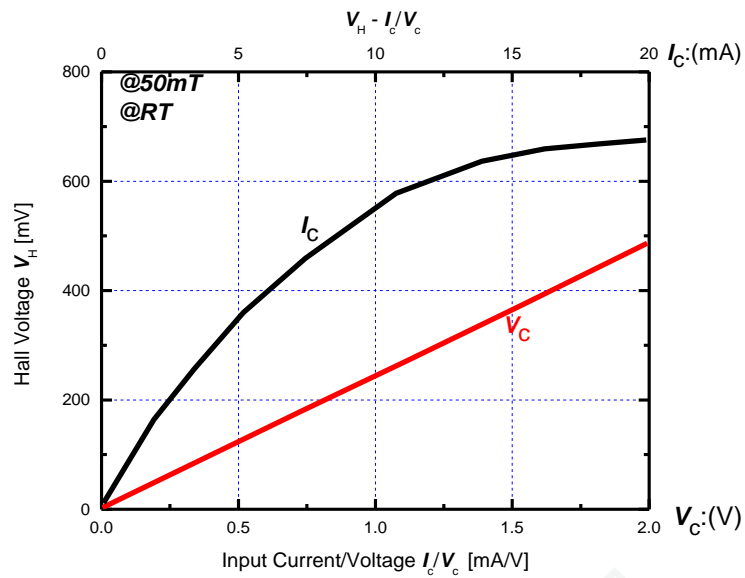


Figure 5. Hall voltage  $V_H$  as a function of electrical stimuli  $I_c/V_c$ .

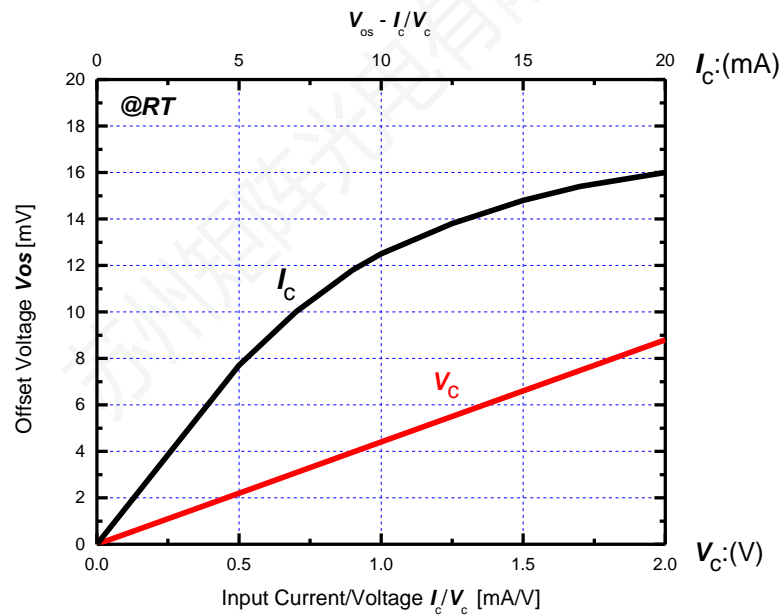


Figure 6. Offset voltage  $V_{os}$  as a function of electrical stimuli  $I_c/V_c$ .

## Reliability Test Terms

**Table 2.** Reliability Test Terms, Conditions and Duration.

No.	Terms	Conditions	Duration
1	High Temperature Storage (HTS)	【JEITA EIAJ ED-4701】 $T_a = 150 ( 0 \sim +10 ) \text{ } ^\circ\text{C}$	1000 hrs
2	Heat Cycle (HC)	【JEITA EIAJ ED-4701】 $T_a = -55^\circ\text{C} \sim 150 \text{ } ^\circ\text{C}$ high temp. - normal temp. - low temp. 30 min - 5 min - 30 min	30 cycles
3	Temp. Humidity Storage (THS)	【JEITA EIAJ ED-4701】 $T_a = 85 \pm 3 \text{ } ^\circ\text{C}$ , $R_H = 85 \pm 5 \%$	1000 hrs
4	Reflow Soldering (RS)	【JEITA EIAJ ED-4701】 $260 \pm 5 \text{ } ^\circ\text{C}$	10 sec
5	High Temp. Operating (HTO)	$T_a = 125 \text{ } ^\circ\text{C}$ , $V_G = 1\text{V}$	1000 hrs

Criteria:

- Variation of Hall Voltage  $V_H$  and input/output resistances  $R_{in/out}$  are less than 20%.
- Variation of offset voltage  $V_{os}$  is less than  $\pm 16\text{mV}$ .
- Other parameters in **Table 1.** are still within their ranges stated in **Table 1.**

## Soldering Conditions

The following conditions should be preserved. Solder ability should be checked by yourself, because it is depend on solder paste material and other parameters.

### Material of solder flux

- Use the resin based flux and refrain from using organic or inorganic acid based and water-soluble one.

### Cleansing of solder flux conditions

- Use Ethanol or Isopropyl alcohol as cleansing material.
- Process temperature should be 50 °C or less.
- Duration should be 5 minutes or less.

### Hand soldering conditions

- Apart from the mold resin more than 1mm.
- Solder at temperature 300 °C for less than 5s.

### Wave soldering conditions

- Temperature in Pre-heating zone should be lower than 150°C.
- Temperature in Soldering zone should be lower than 270°C.

## Precautions for ESD

This product is the device that is sensitive to ESD (Electrostatic Discharge). Handling Hall Elements with the ESD-Caution mark under the environment in which

- Static electrical charge is unlikely to arise (Ex: Relative Humidity over 40%RH).
- Wearing the anti-static suit and wristband when handling the devices.
- Implementing measures against ESD as for containers that directly touch the devices.

## Precautions for Storage

- Products should be stored at an appropriate temperature and humidity (5°C to 35°C, 40%RH to 60%RH) after the unsealing of the MBB. Keeping products away from chlorine and corrosive gas.

- **For storage longer than 2 years**

Products are sealed in MBB with a desiccant. It is recommended to store in nitrogen atmosphere with MBB sealed. Oxygen and H<sub>2</sub>O of atmosphere oxidizes leads of products and lead solder ability get worse.

## Precautions for Safety

- Do not alter the form of this product into a gas, powder or liquid through burning, crushing or chemical processing.
- Observe laws and company regulations when discarding this product.