

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 10A
- 2. Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate Impulse voltage(KV)	4KV	4KV	4KV
Rate voltage(V)	630V	400V	250V
Rate current(A)	8A		

NOTES2:






- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.08mm, Poles : N=04~36P
- 3. Operating temperature: -40°C~+120°C
- 4. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm				Tolerance
	Over	Over	Over	Over	
6	TO	TO	TO	TO	0.1/10
10	TO	TO	TO	TO	≤
24	30	60	100	150	
30	TO	TO	TO	TO	±2°
60	TO	TO	TO	TO	
100	TO	TO	TO	TO	
150	TO	TO	TO	TO	


5. RoHS Compliance

Ordering Information

JL2EDGRHC - 508 XX B 01

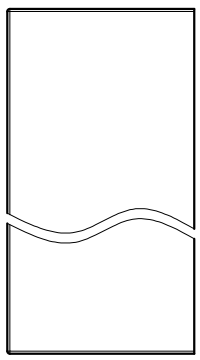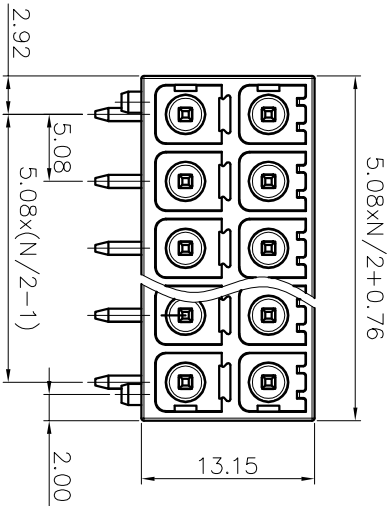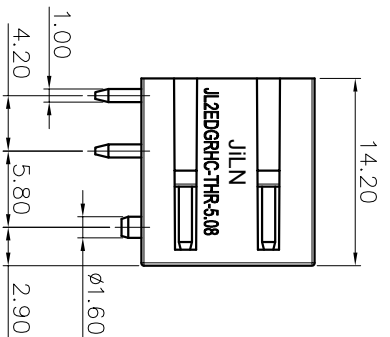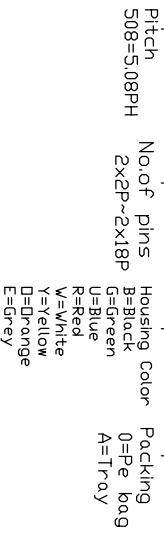

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

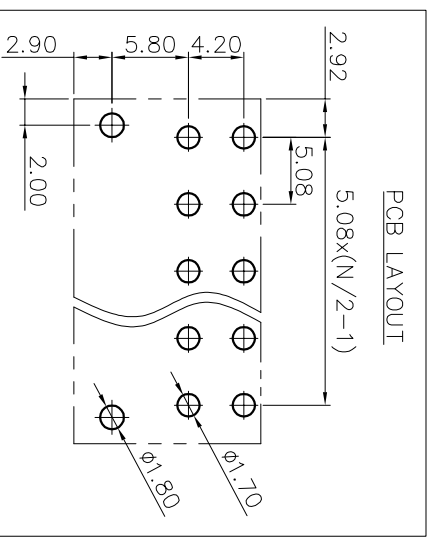

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	TITLE:
	UNIT	mm				
CHECK	LICHAD LIU		SIZE	A4	JL2EDGRHC-508XXB01	JL2EDGRHC-THR-5-08-2XNP插拔式公座/弯脚/黑色/带定位柱
	SHEET	1/1				
APPROVE	YONGLIANG GAO		PRD			

JILIN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD