

RoHS

MATERIAL LIST

TEL: 0769-82001899





| VER | DESCRIBE |
|-----|----------|
| A0 | 新图框编制 |

| NATE |
|------------|
| 2020/08/29 |

| DRAWN |
|-------|
| 姜光鸿 |

| NO. | PART | MATERIAL | COATING/COLOR | QTY |
|-----|-----------|-------------|---------------|-----|
| 1 | HOUSING | PBT UL94V-0 | BLACK | 1 |
| 2 | TERMINALS | BRASS | PLATING GOLD | N |

| | | | | | | | | |
|------------|------------|------------|-----------|-------------|-------|---|---|---|
| 料号释义: | EH | 254 | V | 12 | XX | X | X | X |
| EH=牛角 | 127=1.27间距 | 焊板角度: | 产品类型: | XX=Pin位 | 耳朵区分: | 材 | 质 | 镀 |
| 100=1.00间距 | V=直插 | 12=单塑双排 | routine=A | routine=PBT | 0=G/F | | | |
| 200=2.00间距 | R=弯插 | 254=2.54间距 | VS=立贴 | VS=立贴 | RS=贴 | | | |
| | | | | | | | | |

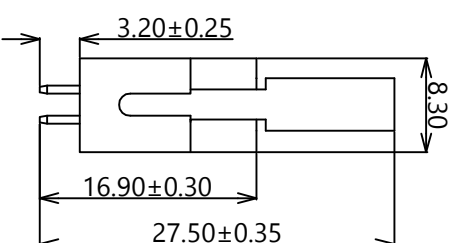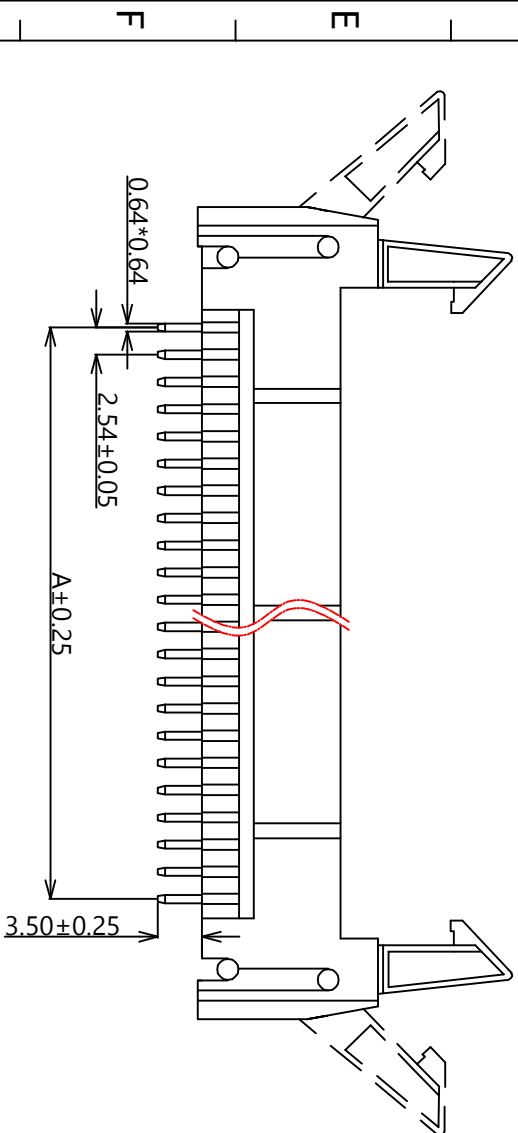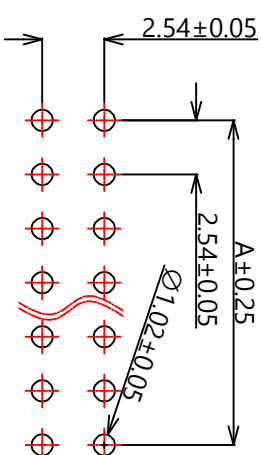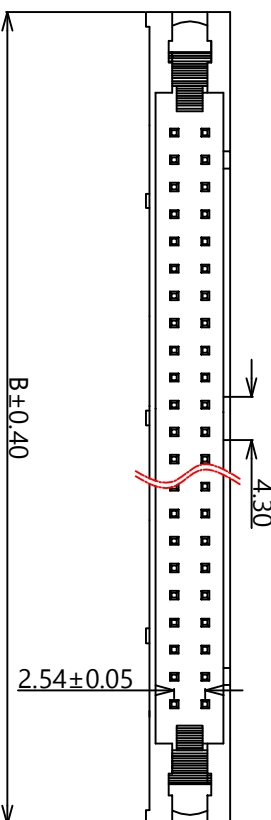

| PIN | Dimensions(mm) | |
|-----|----------------|--------|
| | A | B |
| 06 | 5.08 | 26.82 |
| 08 | 7.62 | 29.36 |
| 10 | 10.16 | 31.90 |
| 14 | 15.24 | 36.98 |
| 16 | 17.78 | 39.52 |
| 18 | 20.32 | 42.06 |
| 20 | 22.86 | 44.80 |
| 24 | 27.94 | 49.68 |
| 26 | 30.48 | 52.22 |
| 30 | 35.56 | 57.30 |
| 34 | 40.64 | 62.38 |
| 40 | 48.26 | 70.00 |
| 50 | 60.96 | 82.70 |
| 60 | 73.66 | 95.40 |
| 64 | 78.74 | 100.48 |

TOLERANCE UNLESS OTHERWISE

| | |
|------------|-------------|
| X. ±0.30 | X° ±5° |
| .X ±0.20 | .X° ±2° |
| .XX ±0.08 | .XX° ±1° |
| .XXX ±0.03 | .XXX° ±0.5° |

| UNIT | mm |
|--------|----------|
| VIEW | 1:1 |
| SCALE | 1:1 |
| NUMBER | XF-EH001 |

XF 兴飞连接器有限公司
FCN XFCN CONNECTORS CO., LTD.

| TYPE | 2.54mm pin horn connector |
|----------|---------------------------|
| PART.NO. | EH254V-12-XXP |

| DRAWN | 姜光鸿 |
|-------|------------|
| CHKD | |
| APPD | |
| DATE | 2020/08/29 |

| DATE | 2020/08/29 |
|------|------------|
|------|------------|