

LT86101UXE --- Product Brief

HDMI2.0/DVI Repeater

1. Features

- HDMI 1.4/2.0 specifications compliant
- Support 4Kx2K extended resolution formats up to 6.0Gbps data rate
- Supports 8/10/12bit deep color
- Supports 4K2K video up to 60Hz frame rate
- Supports all video format which is compliant with HDMI2.0/1.4 specification
- Adaptive equalization and de-emphasis to compensate long cable losses
- Unlimited cascading for more output ports or signal repeating
- Jitter cleaning PLL for better performance
- No external crystal is needed

2. General Description

The Lontium LT86101UXE HDMI2.0/DVI Repeater features a high speed repeater compliant with HDMI2.0/1.4 specification, max 6Gbps high speed data rate, adaptive equalization RX input and pre-emphasized

TX output to support long cable application, no XTAL on board to save BOM cost.

LT86101UXE HDMI2.0/DVI Repeater automatically detect the cable loss, and adaptively optimize the equalization setting .The CDR cleans the input data jitter, make it suitable for long cable and cascade application. It support RX termination resistor calibration to further improve signal integrity. Also, several devices can be cascaded to extend cable reach without degrading signal fidelity. The transmitter supports configurable transmit de-emphasis so that the output can be optimized for driving additional lengths of cables or FR4 traces.

This package is QFN64 7.5mmx7.5mm. It operates from -40°C to +85°C.

3. Applications

- Multiple display/TV support
- DVI/HDMI cable-extender modules
- Cable assemblies
- TMDS cable equalizer

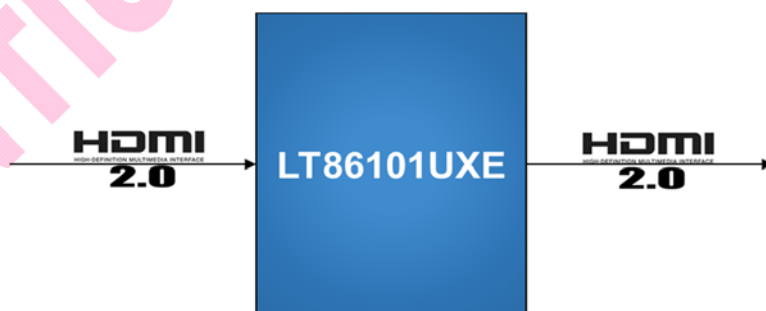


Figure 3.1 Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Part Number	Product Status	Operating Temperature Range	Package	Packing Method	MPQ
LT86101UXE_U5	MP	-40°C to +85°C	QFN64 (7.5*7.5)	Tray	2600pcs
MP: Mass Production.					

LONTIUM CONFIDENTIAL

Copyright © 2016-2021 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com