


未注公差/General tolerances(mm)												0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

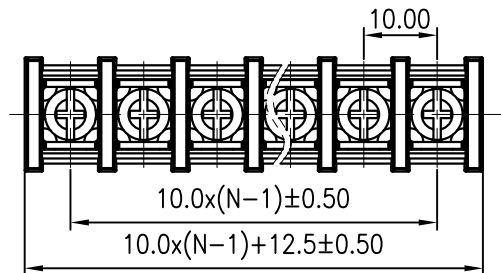

A



A

B

B




0.80±0.10

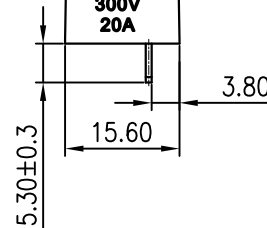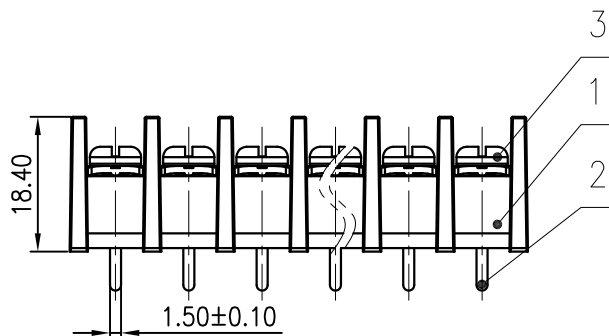

C

C

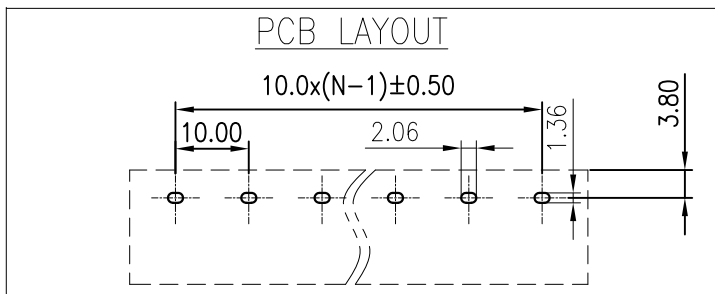

D

D

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
JL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/20	300/20
IEC 标准/IEC Standard:		D	
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		600/32	600/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		1000/32	6
螺丝扭矩/Torque Tightening(N·m/Lb.in)		6	6
线径范围(软线)/Wire Range(flexible)(AWG)		M4, 1.2/10.53	
间距/Pitch(mm)/线数范围/Poles		22~12	
剥线长度/Stripping length(mm)		10.00/N=02~26P	
使用温度范围/Operating temperature(°C)		9	
符合RoHS环保要求/Conform to RoHS		-40~+105	
		Yes	

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD:	NAME: DG55S-B-XXP-1Y-00A(H)		
CHKD:	DRAWING NO.: DG55S-C01		
DRFT: Wu NK 2020.5.26	REV		TO
REV	ECN	DESCRIPTION	DRFT
⊕	SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING
SCALE: 1:1		SHEET	1/1